



Test Report: HVG-100-36

100W Constant Voltage + Constant Current LED Driver

■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Component Stress Test

■ SAFETY & E.M.C. TEST

Safety Test

E.M.C. Test

■ RELIABILITY TEST

ENVIRONMENT TEST

DESIGN VERIFY TEST

OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	RIPPLE & NOISE	V1 : 200 mVp-p (Max)	I/P : 347VAC O/P : FULL LOAD Ta : 25°C	V1 : 24.4 mVp-p (Max)
2	CONSTANT CURRENT REGION	18V ~ 36V	I/P : 347 VAC O/P : FULL LOAD Ta : 25°C	O/P=18V : 2.651A O/P=35V : 2.652 A
3	OUTPUT VOLTAGE ADJUST RANGE	CH1 : 33V ~40 V	I/P : 480 VAC I/P : 347 VAC O/P : MIN LOAD Ta : 25°C	32.362 V ~ 41.144 V/ 480 VAC 32.363 V ~ 41.144 V/ 347 VAC
4	OUTPUT CURRENT ADJUST RANGE	CH1 : 1.45A~2.65A	I/P : 480 VAC I/P : 347 VAC O/P : CV MODE Ta : 25°C	1.228 A~ 3.044 A/ 480 VAC 1.225 A~ 3.042 A/ 347 VAC
5	OUTPUT VOLTAGE TOLERANCE	V1 : 1%~ -1 % (Max)	I/P : 180 VAC / 528 VAC O/P : FULL/ MIN LOAD Ta : 25°C	V1 : 0.2 %~ -0.2 %
6	LINE REGULATION	V1 : 0.5 %~ -0.5% (Max)	I/P : 180 VAC ~ 528 VAC O/P : FULL LOAD Ta : 25°C	V1 : 0 %~ 0 %
7	LOAD REGULATION	V1 : 0.5 %~ -0.5% (Max)	I/P : 347 VAC O/P : FULL ~MIN LOAD Ta : 25°C	V1 : 0.2 %~ -0.2 %
8	SET UP TIME	480VAC : 500 ms (Max) 347VAC : 500 ms(Max) 230VAC : 500 ms(Max)	I/P : 480VAC I/P : 347 VAC I/P : 230 VAC O/P : FULL LOAD Ta : 25°C	480 VAC/ 351 ms 347VAC/ 372 ms 230VAC/ 402 ms
9	RISE TIME	480 VAC : 80 ms (Max) 347VAC : 80 ms (Max) 230VAC : 80 ms (Max)	I/P : 480 VAC I/P : 347 VAC I/P : 230 VAC O/P : FULL LOAD Ta : 25°C	480 VAC/ 21 ms 347VAC/ 19 ms 230VAC/ 19 ms
10	HOLD UP TIME	480 VAC : 30 ms (TYP) 347VAC : 30 ms (TYP)	I/P : 480 VAC I/P : 347 VAC O/P : FULL LOAD Ta : 25°C	480 VAC/ 40 ms 347VAC/ 44 ms
11	OVER/UNDERSHOOT TEST	< ±5%	I/P : 347 VAC O/P : FULL LOAD Ta : 25°C	TEST : <5 %

12	DYNAMIC LOAD	V1 : 3600 mVp-p	I/P : 347 VAC (1).O/P : FULL /Min LOAD 90%DUTY/ 1KHZ (2).O/P : FULL /Min LOAD 50%DUTY/ 120HZ Ta : 25℃	(1)356 mVp-p (2)792 mVp-p																							
13	DIMMER TEST (B Type only) SPEC: *Reference resistance value for output current adjustment (Typical)																										
<table><tr><td>Resistance value</td><td>10K</td><td>20K</td><td>30K</td><td>40K</td><td>50K</td><td>60K</td><td>70K</td><td>80K</td><td>90K</td><td>100K</td></tr><tr><td>Output current</td><td>10%</td><td>20%</td><td>30%</td><td>40%</td><td>50%</td><td>60%</td><td>70%</td><td>80%</td><td>90%</td><td>100%</td></tr></table>						Resistance value	10K	20K	30K	40K	50K	60K	70K	80K	90K	100K	Output current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
Resistance value	10K	20K	30K	40K	50K	60K	70K	80K	90K	100K																	
Output current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%																	
*1 ~ 10V dimming function for output current adjustment (Typical)																											
<table><tr><td>Dimming value</td><td>1V</td><td>2V</td><td>3V</td><td>4V</td><td>5V</td><td>6V</td><td>7V</td><td>8V</td><td>9V</td><td>10V</td></tr><tr><td>Output current</td><td>10%</td><td>20%</td><td>30%</td><td>40%</td><td>50%</td><td>60%</td><td>70%</td><td>80%</td><td>90%</td><td>100%</td></tr></table>						Dimming value	1V	2V	3V	4V	5V	6V	7V	8V	9V	10V	Output current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
Dimming value	1V	2V	3V	4V	5V	6V	7V	8V	9V	10V																	
Output current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%																	
*10V PWM signal for output current adjustment (Typical)																											
<table><tr><td>Duty value</td><td>10%</td><td>20%</td><td>30%</td><td>40%</td><td>50%</td><td>60%</td><td>70%</td><td>80%</td><td>90%</td><td>100%</td></tr><tr><td>Output current</td><td>10%</td><td>20%</td><td>30%</td><td>40%</td><td>50%</td><td>60%</td><td>70%</td><td>80%</td><td>90%</td><td>100%</td></tr></table>						Duty value	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	Output current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
Duty value	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%																	
Output current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%																	
TEST RESULT: I/P : 230 VAC ;Ta : 25℃																											
1	Resistance value	SHORT	10K	20K	30K	40K	50K	60K	70K	80K	90K	100K	OPEN														
	Output current	0.000A	0.284A	0.540A	0.801A	1.062A	1.333A	1.589A	1.830A	2.104A	2.371A	2.629A	2.747A														
	%	0.00%	10.72%	20.38%	30.23%	40.08%	50.30%	59.96%	69.06%	79.40%	89.47%	99.21%	103.66%														
2	Dimming value	SHORT	1V	2V	3V	4V	5V	6V	7V	8V	9V	10V	OPEN														
	Output current	0.000A	0.290A	0.552A	0.813A	1.077A	1.339A	1.602A	1.860A	2.136A	2.391A	2.653A	2.747A														
	%	0.00%	10.94%	20.83%	30.68%	40.64%	50.53%	60.45%	70.19%	80.60%	90.23%	100.11%	103.66%														
3	Duty value	SHORT	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	OPEN														
	Output current	0.000A	0.305A	0.566A	0.829A	1.090A	1.352A	1.614A	1.876A	2.139A	2.401A	2.662A	2.747A														
	%	0.00%	11.51%	21.36%	31.28%	41.13%	51.02%	60.91%	70.79%	80.72%	90.60%	100.45%	103.66%														

INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	180VAC~528 VAC	I/P : TESTING O/P : FULL LOAD Ta : 25°C	158 V~528V
			I/P : LOW-LINE-3V=177V HIGH-LINE+3V=531 V O/P : FULL/MIN LOAD ON : 30 Sec . OFF : 30 Sec 10MIN (AC POWER ON/OFF NO DAMAGE)	TEST : OK
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE	I/P : 180VAC ~ 528 VAC O/P : FULL~MIN LOAD Ta : 25°C	TEST : OK
3	POWER FACTOR	0.98 / 230 VAC(TYP) 0.98 / 277VAC(TYP) 0.97 /347 VAC(TYP) 0.93 / 480 VAC(TYP)	I/P : 230VAC I/P : 277VAC I/P : 347VAC I/P : 480VAC O/P : FULL LOAD Ta : 25°C	PF= 0.994 / 230 VAC PF= 0.992 / 277 VAC PF= 0.986 / 347VAC PF= 0.950 / 480VAC
4	EFFICIENCY	90.5 % (TYP)	I/P : 347 VAC O/P : FULL LOAD Ta : 25°C	90.6 %
5	INPUT CURRENT	347V/ 0.38 A (TYP) 480V/ 0.28 A (TYP)	I/P : 347 VAC I/P : 480 VAC O/P : FULL LOAD Ta : 25°C	I= 0.30 A/ 347 VAC I= 0.24 A/ 480 VAC
6	INRUSH CURRENT	480V/ 25 A (TYP) twidth=900μ s measured at 50% Ipeak	I/P : 480VAC O/P : FULL LOAD Ta : 25°C	I= 33 A/ 480VAC T50= 378 us
7	LEAKAGE CURRENT	< 0.75 mA / 480 VAC	I/P : 480 VAC O/P : Min LOAD Ta : 25°C	L-FG : 0.32 mA N-FG : 0.30 mA
8	TOTAL HARMONIC DISTORTION	Total harmonic distortion will be lower than 20% when output loading is 50% or higher at 230VAC / 277VAC / 347VAC	I/P : 230VAC I/P : 277VAC I/P : 347VAC O/P : 50% LOAD Ta : 25°C	THD : 14.1 THD : 15.5 THD : 18.1
		Total harmonic distortion will be lower than 20% when output loading is 75% or higher at 480VAC	I/P : 480VAC O/P : 75% LOAD Ta : 25°C	THD : 17.77

PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER CURRENT	95% ~ 108%	I/P : 480 VAC I/P : 347 VAC O/P : TESTING Ta : 25°C	105 %/ 480 VAC 105 %/ 347 VAC Constant current limiting, recovers automatically after fault condition is removed
2	OVER VOLTAGE PROTECTION	CH1 : 41V ~46 V	I/P : 480 VAC I/P : 347 VAC O/P : MIN LOAD Ta : 25°C	43.93 V/ 480VAC 44.01 V/ 347 VAC Shut down o/p voltage with auto-recovery or re-power on to recovery
3	OVER TEMPERATURE PROTECTION	SPEC : NO DAMAGE	I/P : 347 VAC O/P : FULL LOAD	O.T.P. Active Shut down o/p voltage, recovers automatically after temperature goes down
4	SHORT PROTECTION	NO DAMAGE	I/P : 528 VAC O/P : FULL LOAD Ta : 25°C	NO DAMAGE Constant current limiting, recovers automatically after fault condition is removed

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	Power Transistor (D to S) or (C to E) Peak Voltage	Q3 Rated : 950V/9A	I/P : High-Line +3V = 531 V O/P : (1)Full Load Turn on (2) Output Short (3)Full load continue Ta : 25°C	(1) 477 V (2) 477 V (3) 475 V
2	Diode Peak Voltage	Q101 Rated : 30A/150V	I/P : High-Line +3V = 531 V O/P : (1)Full Load Turn on (2)Output Short (3)Full load continue Ta : 25°C	(1) 108 V (2) 87 V (3) 105 V
3	Input Capacitor Voltage	C5 Rated : 56u/450V	I/P : High-Line +3V = 531 V O/P : (1)Full Load Turn on /Off (2) Min load Turn on /Off (3)Full Load /Min load Change Ta : 25°C	(1) 406 V (2) 418 V (3) 406 V
4	Control IC Voltage Test	U1 Rated : 10.3V~22.5V	I/P : High-Line +3V = 531 V O/P : (1)Full Load Turn on /Off (2) Min load Turn on /Off (3)Full Load /Min load Change Ta : 25°C	(1) 14.15 V (2) 14.150 V (3) 14.164 V
5	Power Transistor (D to S) or (C to E) Peak Voltage	Q1 Rated : 950V/9A	I/P : High-Line +3V = 531 V O/P : (1)Full Load Turn on (2) Output Short (3)Full load continue Ta : 25°C	(1) 766 V (2) 790 V (3) 765 V

■ SAFETY & E.M.C. TEST

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P : 3.75 KVAC/min I/P-FG : 2KVAC/min O/P-FG : 1.5 KVAC/min	I/P-O/P : 4 KVAC/min I/P-FG : 2.4 KVAC/min O/P-FG : 1.8 KVAC/min Ta : 25°C	I/P-O/P : 3.11 mA I/P-FG : 2.094 mA O/P-FG : 3.23 mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P : 500VDC>100MΩ I/P-FG : 500VDC>100MΩ O/P-FG : 500VDC>100MΩ	I/P-O/P : 500 VDC I/P-FG : 500 VDC O/P-FG : 500 VDC Ta : 25°C /70%RH	I/P-O/P : 28.6 GΩ I/P-FG : 29 GΩ O/P-FG : 30 GΩ NO DAMAGE
3	GROUNDING CONTINUITY	FG(PE) TO CHASSIS OR TRACE < 100 mΩ	40 A / 2min Ta : 25°C / 70%RH	13 mΩ

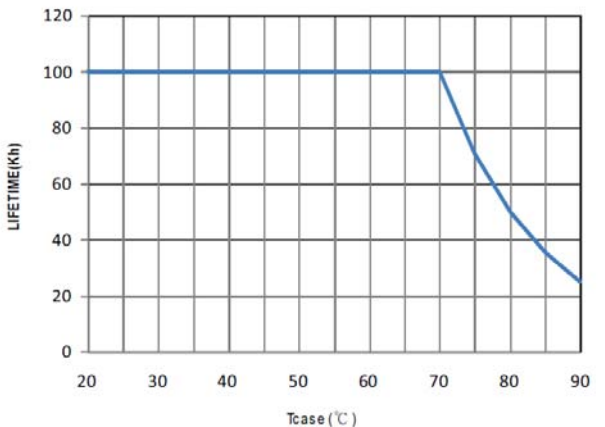
E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 CLASS C	I/P:230VAC/60HZ O/P:100/60%ELECTRONIC LOAD O/P:100% LED LOAD Ta:25°C	PASS
2	CONDUCTION	EN55015 CLASS B	I/P: 230/347VAC (50HZ) O/P:FULL/50% LOAD Ta:25°C	PASS Test by certified Lab
3	RADIATION	EN55015 CLASS B	I/P: 230/347 VAC (50HZ) O/P:FULL LOAD Ta:25°C	PASS Test by certified Lab
4	E.S.D	EN61000-4-2 LIGHT INDUSTRY AIR:8KV / Contact:4KV	I/P:230/347 VAC/50HZ O/P:FULL LOAD Ta:25°C	CRITERIA A
5	E.F.T	EN61000-4-4 LIGHT INDUSTRY INPUT : 1KV	I/P: 230/347 VAC/50HZ O/P:FULL LOAD Ta:25°C	CRITERIA A
6	SURGE	IEC61000-4-5 INDUSTRY L-N :2KV L,N-PE:4KV	I/P: 230/347 VAC/50HZ O/P:FULL LOAD Ta:25°C	CRITERIA A

■ RELIABILITY TEST

ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																																																												
1	TEMPERATURE RISE TEST	<div>MODEL : HVG-100-24</div> <div>1. ROOM AMBIENT BURN-IN : 1.5 HRS</div> <div>I/P : 347VAC O/P : FULL LOAD Ta= 31 °C</div> <div>2. HIGH AMBIENT BURN-IN : 1.5 HRS</div> <div>I/P : 347VAC O/P : FULL LOAD Ta= 64.6 °C</div> <table><thead><tr><th>NO</th><th>Position</th><th>ROOM AMBIENT Ta= 31 °C</th><th>HIGH AMBIENT Ta= 64.6 °C</th></tr></thead><tbody><tr><td>1</td><td>LF2</td><td>52.2°C</td><td>79.3°C</td></tr><tr><td>2</td><td>BD1</td><td>51.2°C</td><td>78.1°C</td></tr><tr><td>3</td><td>C48</td><td>52.3°C</td><td>79.5°C</td></tr><tr><td>4</td><td>L1</td><td>52.7°C</td><td>79.8°C</td></tr><tr><td>5</td><td>D2</td><td>60.0°C</td><td>90.3°C</td></tr><tr><td>6</td><td>C5</td><td>55.7°C</td><td>82.7°C</td></tr><tr><td>7</td><td>Q1</td><td>54.9°C</td><td>81.9°C</td></tr><tr><td>8</td><td>Q3</td><td>55.2°C</td><td>83.0°C</td></tr><tr><td>9</td><td>T3</td><td>56.4°C</td><td>84.0°C</td></tr><tr><td>10</td><td>T1</td><td>60.4°C</td><td>86.3°C</td></tr><tr><td>11</td><td>C203</td><td>57.1°C</td><td>84.0°C</td></tr><tr><td>12</td><td>RTH2</td><td>53.0°C</td><td>80.5°C</td></tr><tr><td>13</td><td>C85</td><td>53.1°C</td><td>79.9°C</td></tr><tr><td>14</td><td>U2</td><td>54.2°C</td><td>80.9°C</td></tr><tr><td>15</td><td>C103</td><td>54.1°C</td><td>81.3°C</td></tr><tr><td>16</td><td>C106</td><td>50.9°C</td><td>78.5°C</td></tr><tr><td>17</td><td>LF100</td><td>51.7°C</td><td>79.1°C</td></tr><tr><td>18</td><td>Q101</td><td>57.8°C</td><td>85.0°C</td></tr></tbody></table>			NO	Position	ROOM AMBIENT Ta= 31 °C	HIGH AMBIENT Ta= 64.6 °C	1	LF2	52.2°C	79.3°C	2	BD1	51.2°C	78.1°C	3	C48	52.3°C	79.5°C	4	L1	52.7°C	79.8°C	5	D2	60.0°C	90.3°C	6	C5	55.7°C	82.7°C	7	Q1	54.9°C	81.9°C	8	Q3	55.2°C	83.0°C	9	T3	56.4°C	84.0°C	10	T1	60.4°C	86.3°C	11	C203	57.1°C	84.0°C	12	RTH2	53.0°C	80.5°C	13	C85	53.1°C	79.9°C	14	U2	54.2°C	80.9°C	15	C103	54.1°C	81.3°C	16	C106	50.9°C	78.5°C	17	LF100	51.7°C	79.1°C	18	Q101	57.8°C	85.0°C
NO	Position	ROOM AMBIENT Ta= 31 °C	HIGH AMBIENT Ta= 64.6 °C																																																																													
1	LF2	52.2°C	79.3°C																																																																													
2	BD1	51.2°C	78.1°C																																																																													
3	C48	52.3°C	79.5°C																																																																													
4	L1	52.7°C	79.8°C																																																																													
5	D2	60.0°C	90.3°C																																																																													
6	C5	55.7°C	82.7°C																																																																													
7	Q1	54.9°C	81.9°C																																																																													
8	Q3	55.2°C	83.0°C																																																																													
9	T3	56.4°C	84.0°C																																																																													
10	T1	60.4°C	86.3°C																																																																													
11	C203	57.1°C	84.0°C																																																																													
12	RTH2	53.0°C	80.5°C																																																																													
13	C85	53.1°C	79.9°C																																																																													
14	U2	54.2°C	80.9°C																																																																													
15	C103	54.1°C	81.3°C																																																																													
16	C106	50.9°C	78.5°C																																																																													
17	LF100	51.7°C	79.1°C																																																																													
18	Q101	57.8°C	85.0°C																																																																													
2	OVER LOAD BURN-IN TEST	NO DAMAGE 1 HOUR (MIN)	I/P : 347 VAC O/P : 103 % LOAD Ta : 25°C	TEST : OK																																																																												
3	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P : 528VAC/200VAC O/P : 100 % LOAD Ta= -40 °C	TEST : OK																																																																												
4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 60°C NO DAMAGE	I/P : 531 VAC O/P : FULL LOAD Ta= 60 °C HUMIDITY= 95 %R.H	TEST : OK																																																																												
5	TEMPERATURE COEFFICIENT	± 0.03%(0~50°C)	I/P : 347 VAC O/P : FULL LOAD	± 0.002 %(0~50°C)																																																																												
6	STORAGE TEMPERATURE TEST	1. Thermal shock Temperature : -45°C~ +90°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle: 5 CYCLE 5. Input/Output condition : STATIC		OK																																																																												

7	THERMAL SHOCK TEST	1. Thermal shock Temperature : $-45^{\circ}\text{C} \sim +65^{\circ}\text{C}$ 2. Temperature change rate : $25^{\circ}\text{C} / \text{MIN}$ 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 10 CYCLE 5. Input/Output condition : 347VAC/Full Load AC ON/OFF TEST turn on 58sec ; turn off 2sec	OK
8	VIBRATION TEST	1 Carton & 1 Set (1) Waveform : Sine Wave (2) Frequency : 10~500Hz (3) Sweep Time : 12min/sweep cycle (4) Acceleration : 5G (5) Test Time : 72min in each axis (X.Y.Z) (6) Ta : 25°C	TEST : OK
9	CAPACITOR LIFE CYCLE	HVG-100-24:SUPPOSE C103 IS THE MOST CRITICAL COMPONENT (1) I/P : 347VAC O/P : FULL LOAD Ta= 25°C LIFE TIME (2) I/P : 347VAC O/P : FULL LOAD Ta= 60°C LIFE TIME (3) I/P : 347VAC O/P : 75% LOAD Ta= 60°C LIFE TIME (4) I/P : 347VAC O/P : 50% LOAD Ta= 60°C LIFE TIME	(1) 521979HRS (2) 71882HRS (3) 101724HRS (4) 137017HRS
10	MTBF	Conducted by Parts Stress Analysis Prediction 174.9K hrs min. MIL-HDBK-217F (25°C)	
11	DMTBF/Accelerated Life Test	Demonstration Mean Time Between Failure(Expected Life) : 50,000 hours @ Tcase 80°C 	

RESULT	TESTER	REVIEW	APPROVAL
PASS	DANIEL GAO	SANFORD SU	VINCENT TSENG

12.10.30 A50-F031