Intelligent Tunable White LED Driver (Constant Current)

- The housing is made from V0 flame retardant PC materials from SAMSUNG/COVESTRO.
- Ultra-small, thin and light screwless end cap.
- Change the output current, fade time and other parameters on the NFC programmer or via the App, and sync the parameters to the driver.
- Set the output current down to 1mA.
- With soft-on and fade-in dimming function, enhancing your visual comfort.
- T-PWM Super depth dimming technology, dimming depth can reach 0.0001%
- The whole dimming process is flicker-free with high frequency exemption level.
- Comply with the EU's ErP Directive, networked standby<0.5W.
- When there is no load, the output will be 0V to prevent damage to LEDs due to poor contact.
- Overheat, over voltage, overload, short circuit protection and
- automatic recovery.
- Suitable for Class Ⅰ / Ⅱ / Ⅲ indoor light fixtures.
- Normal service life can reach 100,000 hours.
- 5-year warranty (Rubycon capacitor)

RDM
DMX

DIM / CT

T-PWM
Dimming Technology

Flicker Free
IEEE 1789

Dimmable:
10000 : 1

NFC
Programmable



The certification icon represents undergoing certification applications only, and final certification qualification subject to actual product.


Multi current setting | Constant power setting | Overheat Protection | Over voltage protection | Over Load protection | Short circuit protection


Technical Specs

Model		SE-12-100-500-W2M		
Features	Output Type	Constant current		
	Dimming Interface	DMX512/RDM		
	Output Feature	Isolation		
	Protection Grade	IP20		
	Insulation Grade	Class II (Suitable for class I/ II /III light fixtures)		
OUTPUT	Output Voltage	9-42Vdc		
	Maximum output voltage	≤48Vdc		
	Output Current Range	100-500mA		
	Output Power Range	0.9W-12W		
	Dimming Range	0~100%, down to 0.01%		
	LF Current Ripple	<3%(Maximum current for non dimming state)		
	Current Accuracy	±5%		
	PWM Frequency	≤3600Hz		
INPUT	DC Voltage Range	100-240Vdc		
	AC Voltage Range	100-240Vac		
	DC current range	0.06-0.16A		
	Input Voltage	115Vac/230Vac		
	Frequency	0/50/60Hz		
	Input Current	≤0.18A/115Vac, ≤0.08A/230Vac		
	Power Factor	PF>0.95/115Vac (at full load), PF>0.9C/230Vac (at full load)		
	THD	THD≤10%/230Vac, at full load		
	Efficiency (Typ.)	84%@300mA(at full load), 82%@500mA(at full load)		
	Inrush Current	Cold start 15A(Test twidth=102us tested under 50% Ipeak)/230Vac		
	Anti Surge	L-N: 2KV		
	Leakage Current	Max. 0.5mA		
ENVIRONMENT	Working Temperature	ta: -20 ~ 50°C tc: 80°C		
	Working Humidity	20 ~ 95%RH, non-condensing		
	Storage Temperature/Humidity	-40 ~ 80°C/10~95%RH		
	Temperature Coefficient	±0.03%/°C(0-50°C)		
	Vibration	10~500Hz, 2G 12min/1cycle, 72 min for X, Y and Z axes respectively		
PROTECTION	Overload Protection	Automatically protect the device when the load exceeds 102% of the rated power. Automatically recover once load is reduced		
	Overheat Protection	Intelligently adjust or turn off the current output if the PCB temperature ≥110°C.		
	Overvoltage Protection	Automatically protect the device when voltage exceeds the no-load voltage. It can be recovered automatically		
	Short Circuit Protection	Enter hiccup mode if short circuit occurs, and recover automatically		
SAFETY & EMC	Withstand Voltage	I/P-O/P: 3750Vac		
	Insulation Resistance	I/P-O/P: 100MΩ/500VDC/25°C/70%RH		
	Safety Standards	CCC	China	GB19510.1, GB19510.14
		TUV	Germany	EN61347-1, EN61347-2-13, EN62493
		CB	CB Member States	IEC61347-1, IEC61347-2-13
		CE	European Union	EN61347-1, EN61347-2-13, EN62384
		KC	Korea	KC61347-1, KC61347-2-13
		EAC	Russia	IEC61347-1, IEC61347-2-13
		RCM	Australia	AS 61347-1, AS 61347-2-13
		ENEC	Europe	EN61347-1, EN61347-2-13, EN62384
		UKCA	Britain	BS EN 61347-1, BS EN 61347-2-13, BS EN 62493
		BIS	India	IS 15885 (PART 2/SEC 13)
		CUL	Canada	CSA C22.2 NO.250.13
		UL	America	UL 8750
	EMC Emission	CCC	China	GB/T17743, GB17625.1
		CE	European Union	EN55015, EN61000-3-2, EN61000-3-3, EN61547
		KC	Korea	KSC 9815, KSC 9547
		EAC	Russia	IEC62493, IEC61547, EH55015
		RCM	Australia	EN55015, EN61000-3-2, EN61000-3-3, EN61547
		UKCA	Britain	BS EN IEC 55015, BS EN IEC 61000-3-2, BS EN 61000-3-3, BS EN 61547
		CUL	Canada	ICES-005
		UL	America	FCC PART 15B
	EMC Immunity	EN61000-4-2,3,4,5,6,8,11, EN61547		
ErP	Power Consumption	Networked standby		<0.5W (After shutdown by command)
		No-load power consumption		<0.5W (When the lamp is not connected)
	Flicker/Stroboscopic Effect	IEEE 1789		Meet IEEE 1789 standard/High frequency exemption level
		CIE SVM		Pst LM≤1.0，SVM≤0.4
	DF	Phase factor		DF≥0.9
OTHERS	Weight(N.W.)	85g±10g		
	Dimensions	110×35×20mm(L×W×H)		

Product Size

Unit：mm

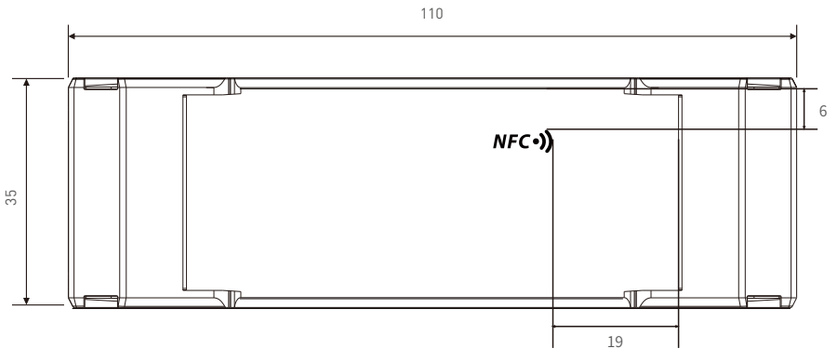


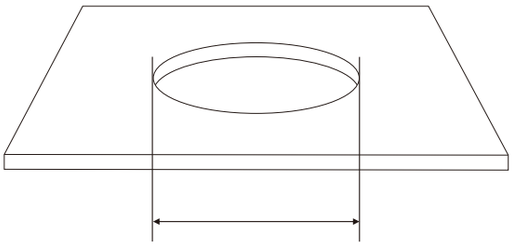

Minimum hole size: φ40mm (1,57")

Wiring Diagram

DMX/RDM Connection

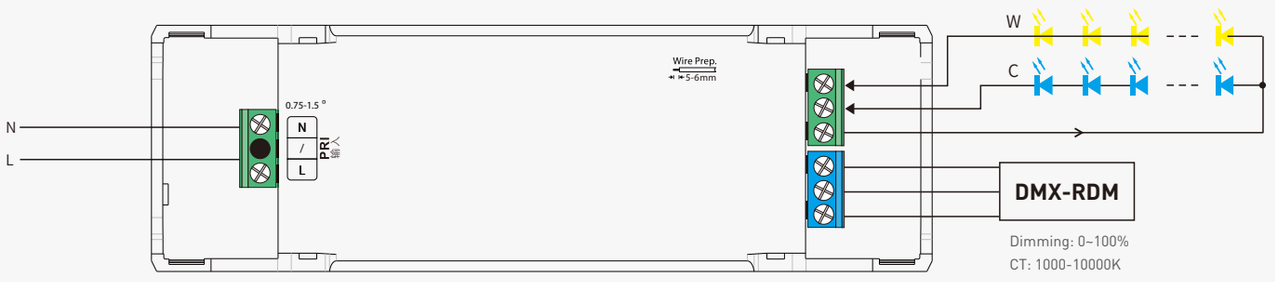

Wire diameter: 0.75-1.5²(20-16AWG)
Strip length: 5-6mm


Wire diameter: 0.5-1.5²(22-16AWG)
Strip length: 5-6mm

Dimming: 0~100%
CT: 1000-10000K



First address N dimmingN+1
address color adjustment temperature

Four-wire LED connection

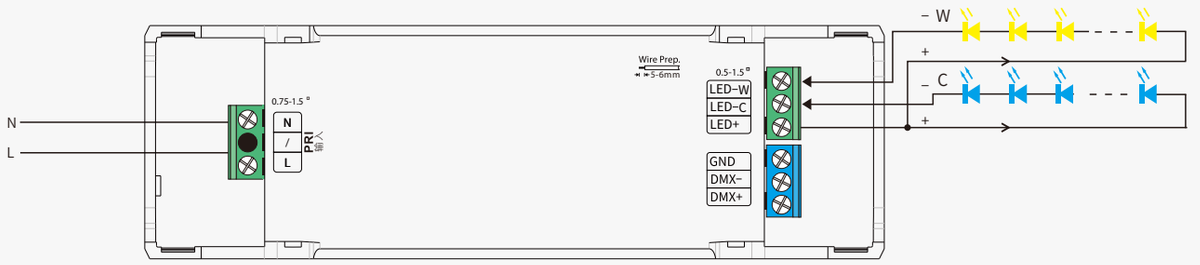

＊ Adopting constant power program design, it keeps the same brightness in color temperature dimming, twice the rated power load can be connected.
12W driver, 12W X 2CH load can be connected, the total power of the 2 channels will be kept in 12W.

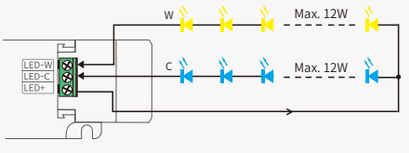


Table of Typical Corresponding Parameters for Current

The typical 9 current data sets below are for reference when selecting LED fixture models. More current levels can be set by NFC using mobile APP with 100-500mA adjustable in 1mA step					
Output Current	100mA	150mA	200mA	250mA	300mA
Output Voltage	9-42Vdc	9-42Vdc	9-42Vdc	9-42Vdc	9-40Vdc
Output Power	0.9-4.2W	1.35-6.3W	1.8-8.4W	2.25-10.5W	2.7-12W
Output Current	350mA	400mA	450mA	500mA	/
Output Voltage	9-34Vdc	9-30Vdc	9-27Vdc	9-24Vdc	/
Output Power	3.15-11.9W	3.6-12W	4.05-12.15W	4.5-12W	/

Protective Housing Application Diagram



1. Use a tool to pry up the protective housing on the side panel.


2. Pry up the protective housing in the side plate position with a tool.

3. Connect to electrical wires with a screwdriver as wiring diagram shows.

4. Press down the tension plate to fix the the electrical wires.


5. Close the protective housing.

Installation Precautions

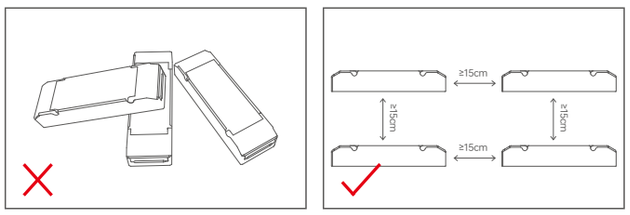


Please do not stack the products. The distance between two products should be ≥15cm so as not to affect heat dissipation and the lifespan of the products.

Note: The installation should be in line with the environmental operating temperature of the product. Do not install it inside the lamp to avoid exceeding the environmental operating temperature of the product, which may affect the product's lifespan.

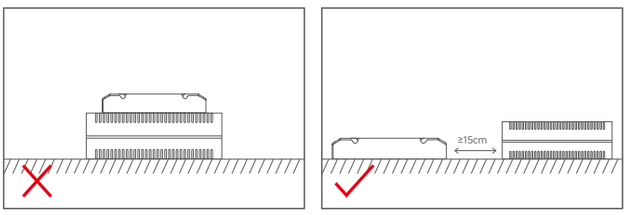

Please not place the products on LED drivers. The distance between the product and the driver should be ≥15cm so as not to affect heat dissipation and shorten the lifespan of the products.

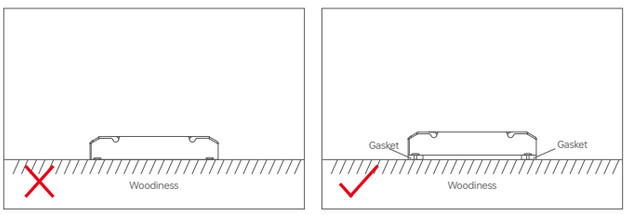

Do not fix the product screws tightly against the wooden board. Instead, add a washer with a thickness of ≥ 7mm under the fixing screws. Leaving some gaps can effectively dissipate heat, preventing any impact on the product's heat dissipation performance and service life.

Use the NFC Lighting APP

Scan the QR code below with your mobile phone and follow the prompts to complete the APP installation (According to performance requirements, you need to use a NFC-capable Android phone, or an iphone 8 and later that are compatible with iOS 13 or higher).


∗ Before you begin setting the parameters of the driver, please make sure the driver is powered off.

Read/Write the LED driver

Use your NFC-capable phone to read LED driver data, then edit the parameters and they can be directly written to the driver.


1. Read the LED driver

On the APP home page, click【Read/Write LED driver】, then keep the programmer's sensing area close to the NFC logo of the driver to read the driver parameters.

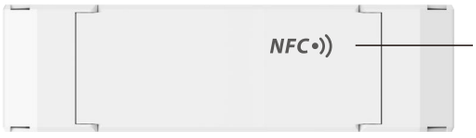


2. Switch the dimming interface


On the page of "Edit parameters", click 【Dimming interfaces】to switch to the needed dimming interface: CT, DIM(1 address for 1 channel / 1 address for 2 channels / 2 addresses for 2 channels).



1 address for 1 channel



1 address for 2 channels



2 addresses for 2 channels


3. Edit the parameters


Click【Parameter settings】to edit the advanced parameters, like output current, DMX address, brightness range, power-on fading time, etc.


4. Write to the driver

After completing the parameter settings, click 【Write】 in the upper right corner, and keep the programmer's sensing area close to the NFC logo of the driver, so the parameters can be written to the driver.



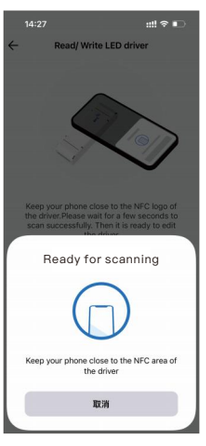


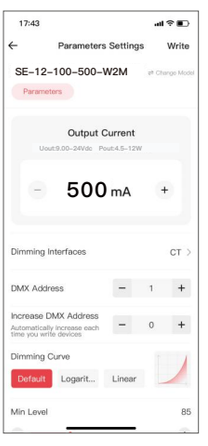

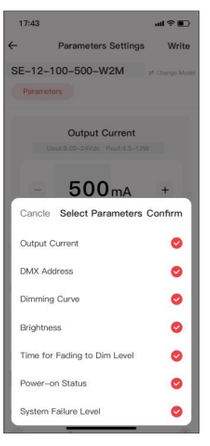

Use with RDM Editor


The DMX driver can work with the address editor that complies with standard RDM protocol.
It is recommended to use LTECH's RDM editor (model WiFi-RDM01), which can achieve more functions such as remote browsing and parameter setting. Wiring diagram as below:

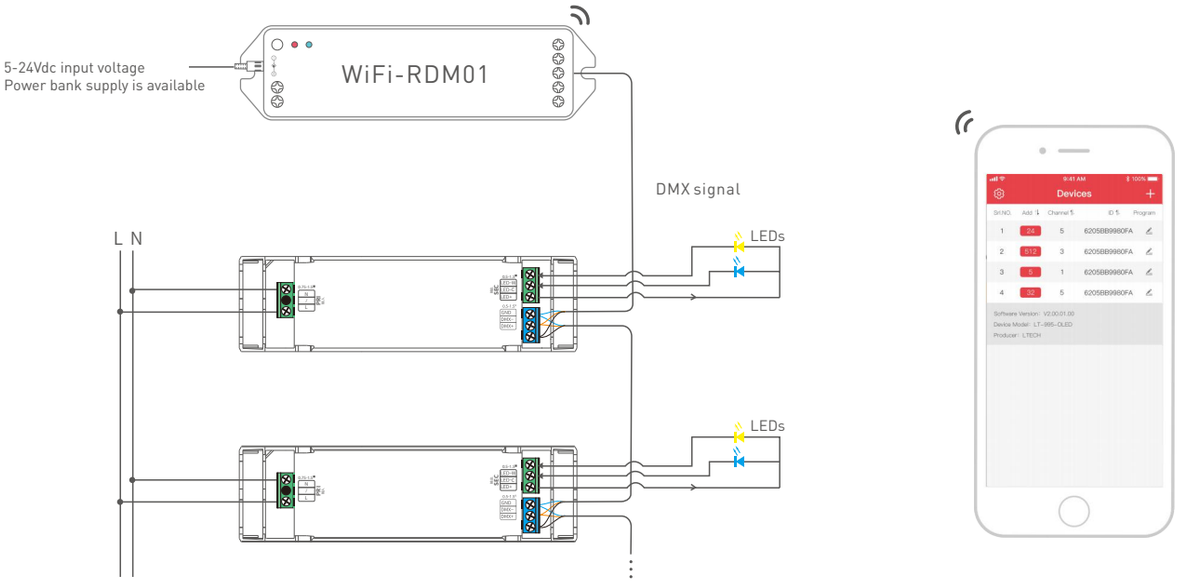



✻ the defaulted DMX address of the driver is 1.

LTECH RDM editor App interface instruction

Download the App, setting the parameters after well connecting the RDM editor, please check the manual of WiFi-RDM01 for more details.

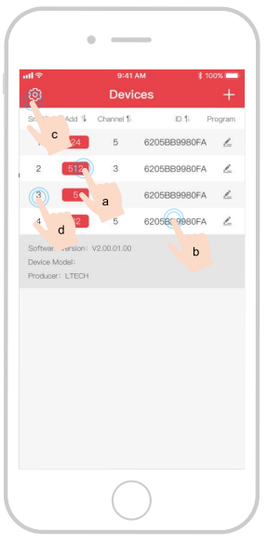

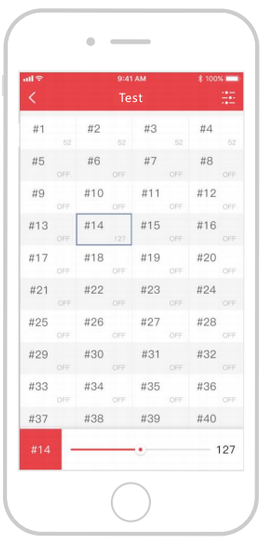

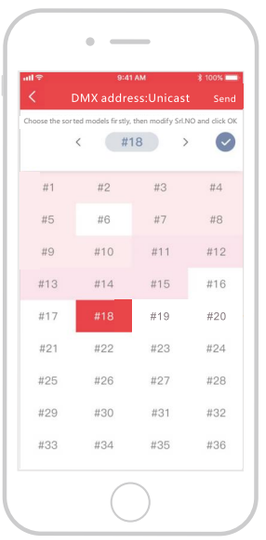



a: Click "Add", edited the address in corresponding box.
b: Click "ID", get more product details.
c: Click " ⚙ ", enter setting interface.
d: Click "No.", issue the recognizing command.


Test


DMX address setting

Relationship Diagrams

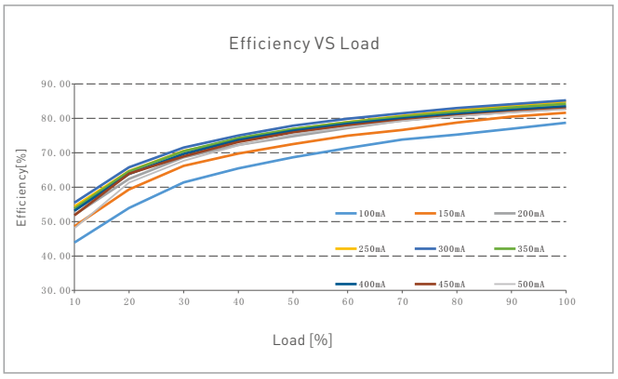

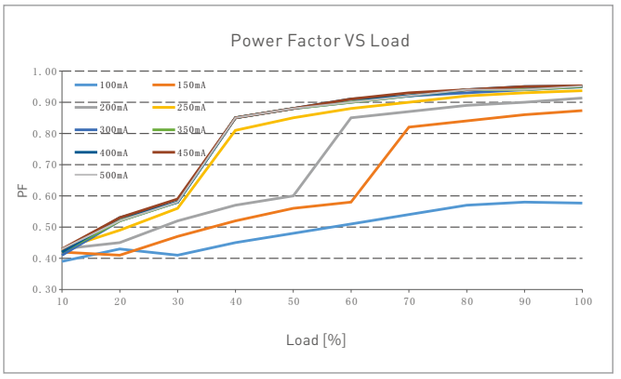

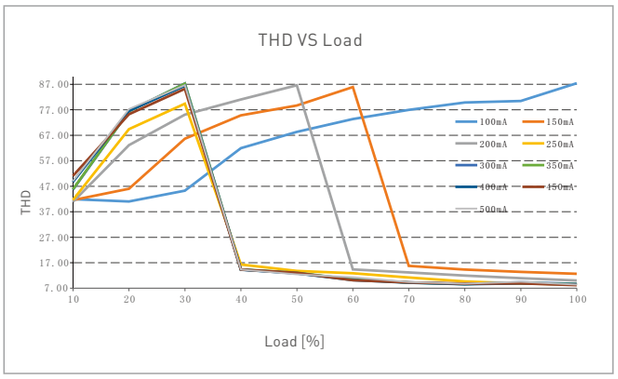

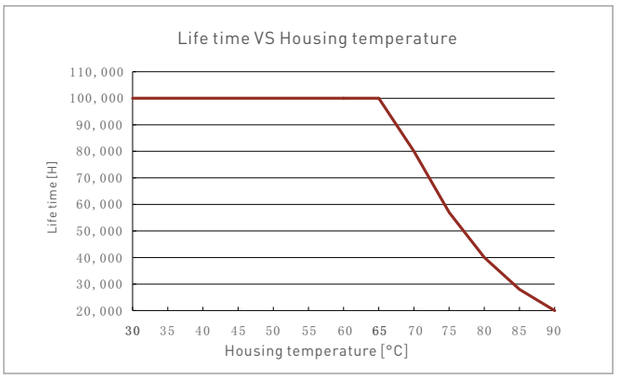

SE-12-100-500-W2M


Flicker Test Sheet

IEEE 1789

Limit of modulation in low risk area	
Waveform frequency of optical output	limit (%)
$f \leq 8Hz$	0.2
$8Hz < f \leq 90Hz$	$0.025 \times f$
$90Hz < f \leq 1250Hz$	$0.08 \times f$
$f > 1250Hz$	Exemption assessment
Limit of modulation in no effect area	
Waveform frequency of optical output	limit (%)
$f \leq 10Hz$	0.1
$10Hz < f \leq 90Hz$	$0.01 \times f$
$90Hz < f \leq 3125Hz$	$[0.08/2.5] \times f$
$f > 3125Hz$	Exemption assessment (High frequency exemption)

Brightness

- 0.1%
- 1%
- 5%
- 10%
- 20%
- 30%
- 40%
- 50%
- 60%
- 70%
- 80%
- 90%
- 100%

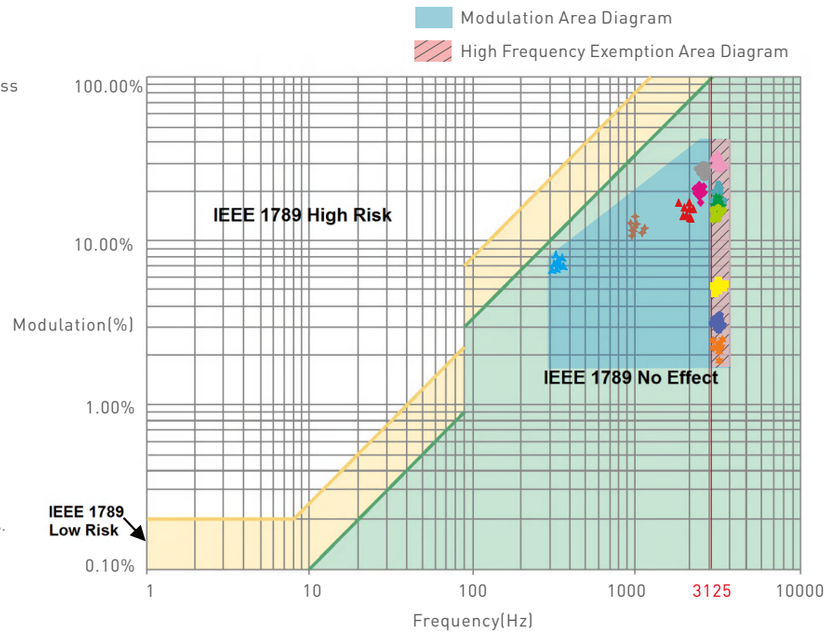


Marks in the right chart were tested results of different current ranges.

The output frequeny is 0Hz in 100% brightness and its corresponding modulation is 0%, which could not be shown in the right chart.

Packaging Specifications

Model	SE-12-100-500-W2M
Carton Dimensions	260×240×215mm(L×W×H)
Quantity	20 PCS/Layer; 5 Layers/Carton; 100 PCS/Carton
Weight	0.095 kg/PC; 9.5 kg±5%/Carton

Packaging Image



Inner Packaging Box



Carton Packaging

Transportation and Storage

1. Transportation

Products can be shipped via vehicles, boats and planes.

During transportation, products should be protected from rain and sun. Please avoid severe shock and vibration during the loading and unloading process.

2. Storage

The storage conditions should comply with the Class I Environmental Standards. The products that have been stored for more than six months are recommended to be re-inspected and can be used only after they have been qualified.

Attentions

- This product must be installed and adjusted by a qualified professional.
- LTECH products are and not lightningproof non-waterproof (special models excepted). Please avoid the sun and rain. When installed outdoors, please ensure they are mounted in a water proof enclosure or in an area equipped with lightning protection devices .
- Good heat dissipation will extend the life the product. Please install the product in a environment with good ventilation.
- When you install this product, please avoid being near a large area of metal objects or stacking them to prevent signal interference.
- Please keep the product away from a intense magnetic field, a high pressure area or a place where lightning is easy to occur.
- Please check whether the working voltage used complies with the parameter requirements of the product.
- Before you power on the product, please make sure all the wiring is correct in case of incorrect connection that may cause a short circuit and damage the components, or trigger a accident.
- If a fault occurs, please do not attempt to fix the product by yourself. If you have any question, please contact the supplier.

* This manual is subject to changes without further notice. Product functions depend on the goods. Please feel free to contact our official distributors if you have any question.

Warranty Agreement

- Warranty periods from the date of delivery: 5 years.
- Free repair or replacement services for quality problems are provided within warranty periods.

Warranty exclusions below:

- Beyond warranty periods.
- Any artificial damage caused by high voltage, overload, or improper operations.
- Products with severe physical damage.
- Damage caused by natural disasters and force majeure.
- Warranty labels and barcodes have been damaged.
- No any contract signed by LTECH.

1. Repair or replacement provided is the only remedy for customers. LTECH is not liable for any incidental or consequential damage unless it is within the law.
2. LTECH has the right to amend or adjust the terms of this warranty, and release in written form shall prevail.

Update Log

Version	Updated Time	Update Content	Updated by
A0	20231028	Original version	Yang Weiling
A1	20260318	Replace the logo; update the silk screen; add the company name, address, website, etc.	Haipeng Li