

## 222 COMPACT SPLICING CONNECTOR, 2 PORT & 3 PORT 2 WAY, WITH LEVER

### DESCRIPTION


This connector series offers both 2-in, 2-out and 3-in, 3-out configurations encased in sturdy PA66 housing with brass metal contacts. Each is designed with a lever mechanism for quick and secure wire connections, providing a streamlined solution for residential or commercial electrical installations.



### MODLE

	PP-222-2J	PP-222-3J
Housing	PA66	PA66
Metal Part	Copper	Copper
Europe Standard	250V 32A	250V 32A
USA Standard	600V 20A	600V 20A
China Standard	450V 32A	450V 32A
Cable Range	20-12 AWG	20-12 AWG
Operating Temperature	-40°F to +185°F ( -40°C to +85°C )	-40°F to +185°F ( -40°C to +85°C )

### Dimension

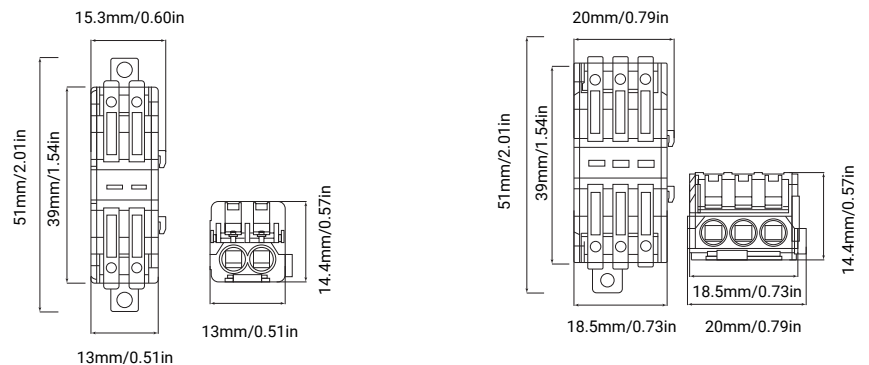

### MORE INFORMATION

For more information, please contact us at (888) 228-9138, email [contact@powersupplymall.com](mailto:contact@powersupplymall.com), or visit our website at [www.powersupplymall.com](http://www.powersupplymall.com).