

WIRING DEVICES

CATALOGUE

Wiring devices.

Catalogue

General index

EIKON	27
ARKÉ	141
PLANA	217
CUSTOMISATION	284
SYSTEMS	
Smart home View Wireless	294
 By-me Plus: smart automation	300
 Well-contact Plus: building automation	316
By-alarm: burglar alarm system	326
ENCLOSURES AND BOXES	332

BEAUTY
ENERGY
LIFE





Since 1945 our energy is driven by passion and are engaged in supporting the evolution of living styles.

The heart of our company, where we create, design, manufacture and test all our products, is in the North East of Italy. We continue manufacturing here at Marostica: from the materials to the shapes, the colour matches to electronic processes, we are distinguished by quality, style and technology that speak our language all over the world. A long tradition and history of success, a culture based on solid and true values.

Research. Technology. Simplicity.

To ensure the best of technology and design, 6% of our annual turnover is invested in R&D. This has allowed us over the years to lodge more than 200 patents worldwide, reflecting the attention of the great innovation like the little details that make every day life more simple and comfortable. We firmly believe that new ideas are created to be shared.

From the simple electrical wiring to the advanced technological systems, **we solve, transform and connect your energy.**

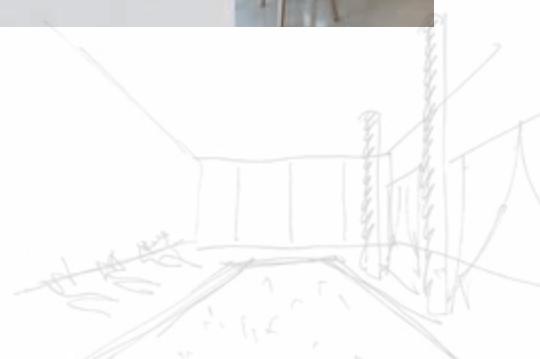
LIFESTYLE EVOLUTION



PRIVATE VILLA, ITALY

We solve, transform and connect your energy.

This allows us to offer **finishes and details that make our products items of interior design**. Convinced that form and technology must live together, we dedicate time and energy on developing new projects of electronic and electromechanical engineering and researching new materials.



We work closely with the most famous designers, ensuring we evolve alongside the architectural and living styles. Our products are the results of this approach: design proposals composed of harmonious geometries, refined materials and a careful study of the finishes, designed to enhance the look of all environments for best-fitting to your projects.



VISION ECOSYSTEM VIEW



The vision to link our product system

View is a unique platform which includes systems and products connected for new buildings, renovation or upgrade of existing systems.

A set of solutions for comfort, energy efficiency and security, with aesthetically coordinated and personalized products to answer to every architectural environment. Interconnected systems and products communicate each other constantly and perfectly, to satisfy the specific requirements of whom lives and realizes spaces.



A single app: an unique experience and intuitive interface. You can manage, control and create favourite scenarios using the View app. Integrate the app with the IFTTT platform to integrate with third-party connected devices. Through the VIEW App and Vimar Cloud, you are connected to your spaces from everywhere and you are up-to-date on what is happening inside and outside the building. Simply connected to your own world.

TOUCH THE SWITCHES

Refined details, created to provide specific solutions; contemporary palettes, chosen to suit all combinations; unusual or costly materials, crafted with the know-how of our artisans or with state-of-the-art yet eco-friendly production technologies.



Eikon.
Elegance, excellence, value

Go to page 27





Arké.

Enjoy your living spaces

Go to page 141



Plana.

Strong universal character

Go to page 217





Bespoke design.

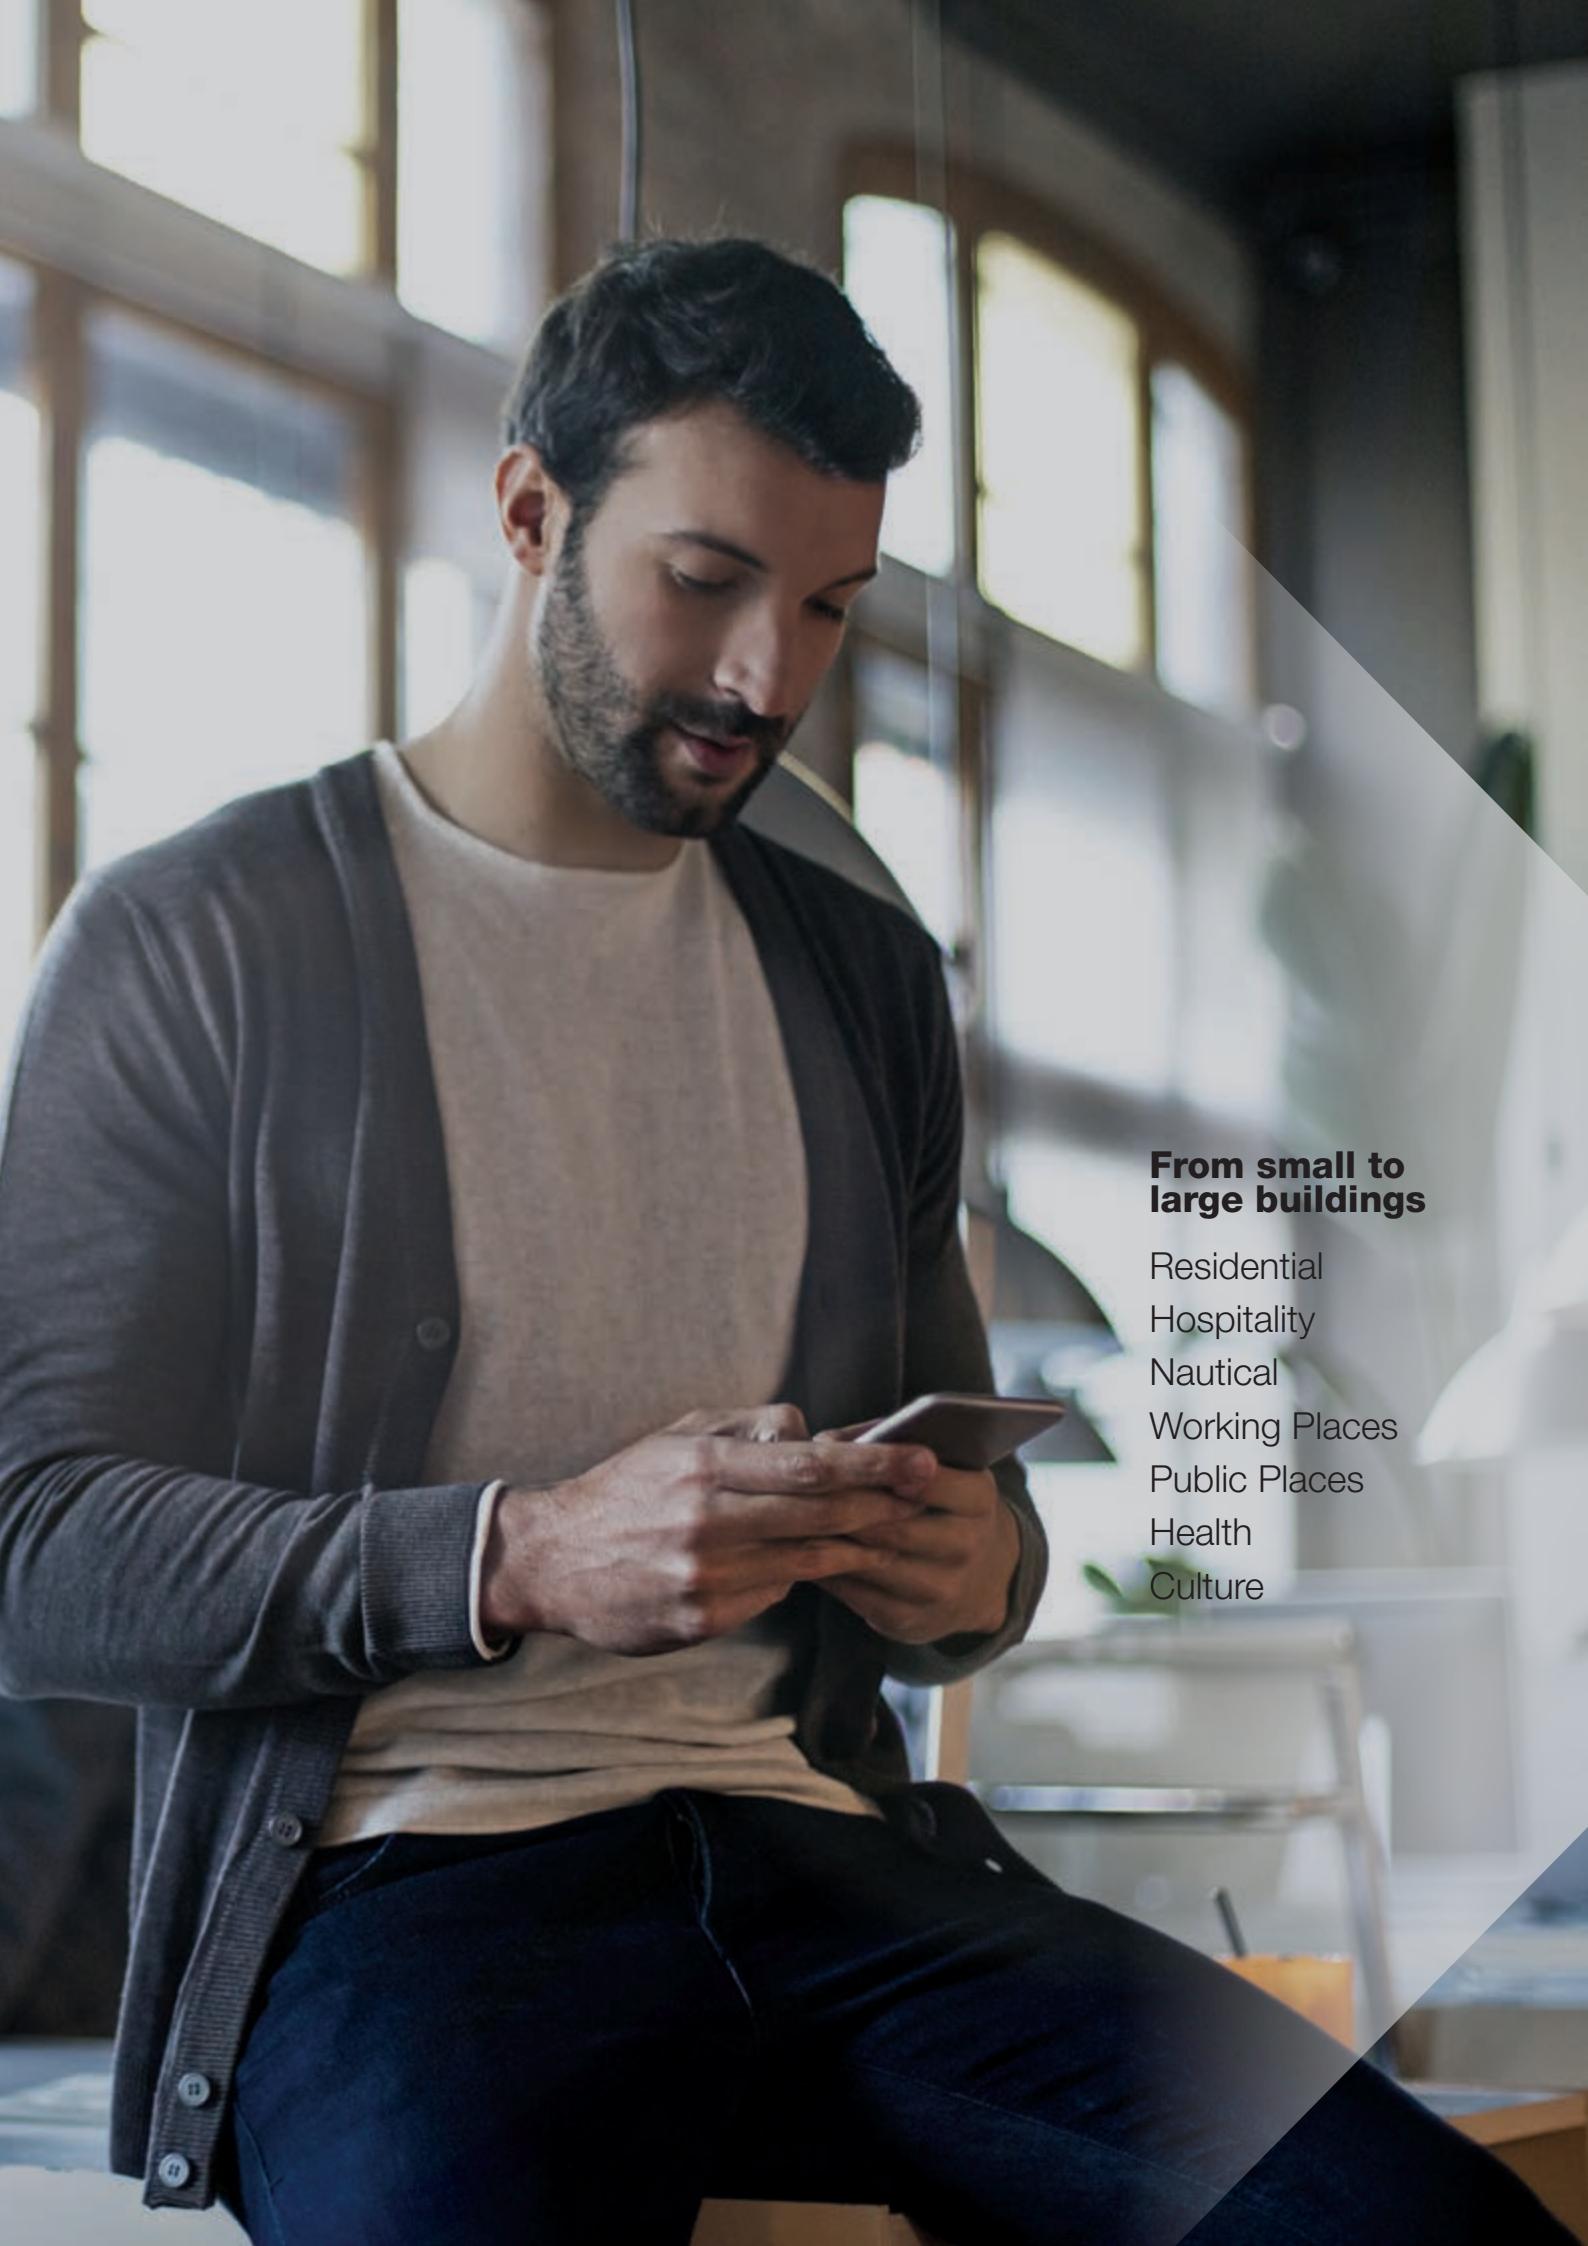
Personal design

In response to new interior design trends, Vimar offers the possibility of not only choosing premium new materials but also customizing wiring devices so that to realize dedicated aesthetic solutions to enhance and enrich the building.



To promote the identity of the building, cover plates can bear any type of logo, while controls and buttons can be customized based on the chosen functions. Symbols and wordings are laser engraved with the maximum precision on the surface choosing from an extensive gallery or supplied from the customer.






**From small to
large buildings**

Residential
Hospitality
Nautical
Working Places
Public Places
Health
Culture

Versatile solutions

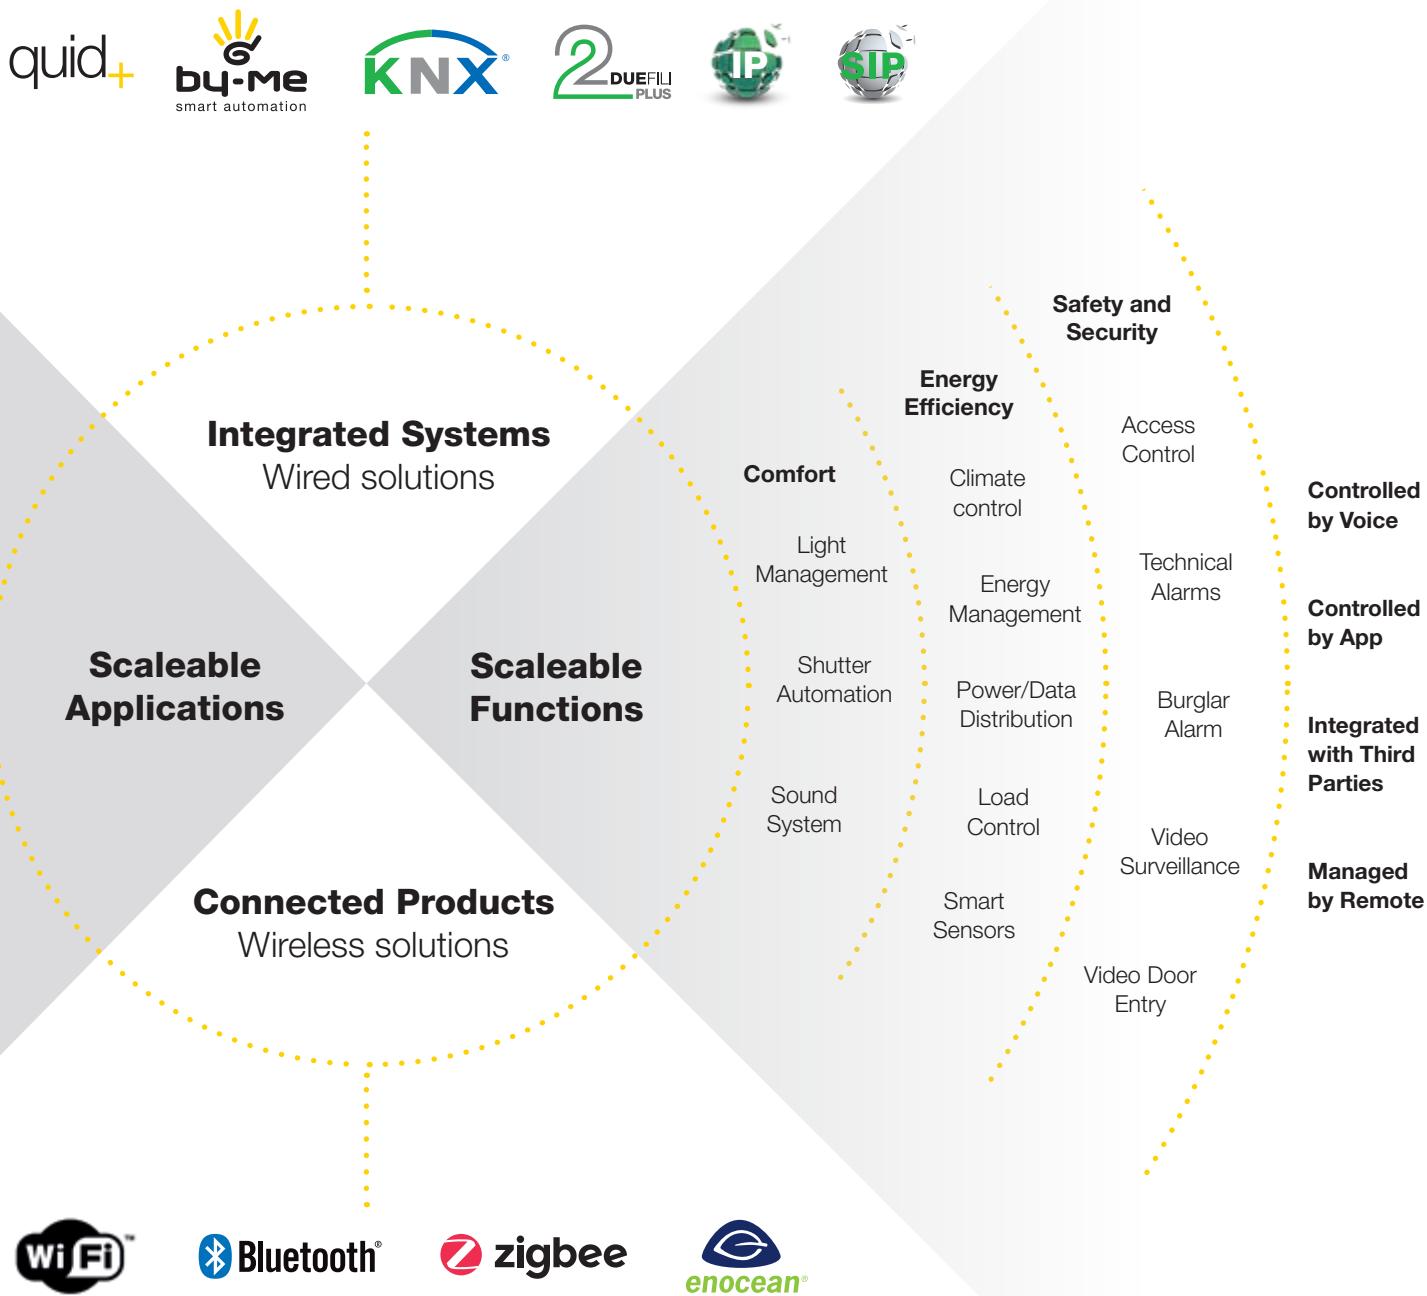Our solutions respect the identity of every setting. You can smartly, simply and constantly expand your ecosystem for a total home and building control.






LUXURY HOTEL HALL

Versatile solutions and scalable systems.

Wired and wireless solutions

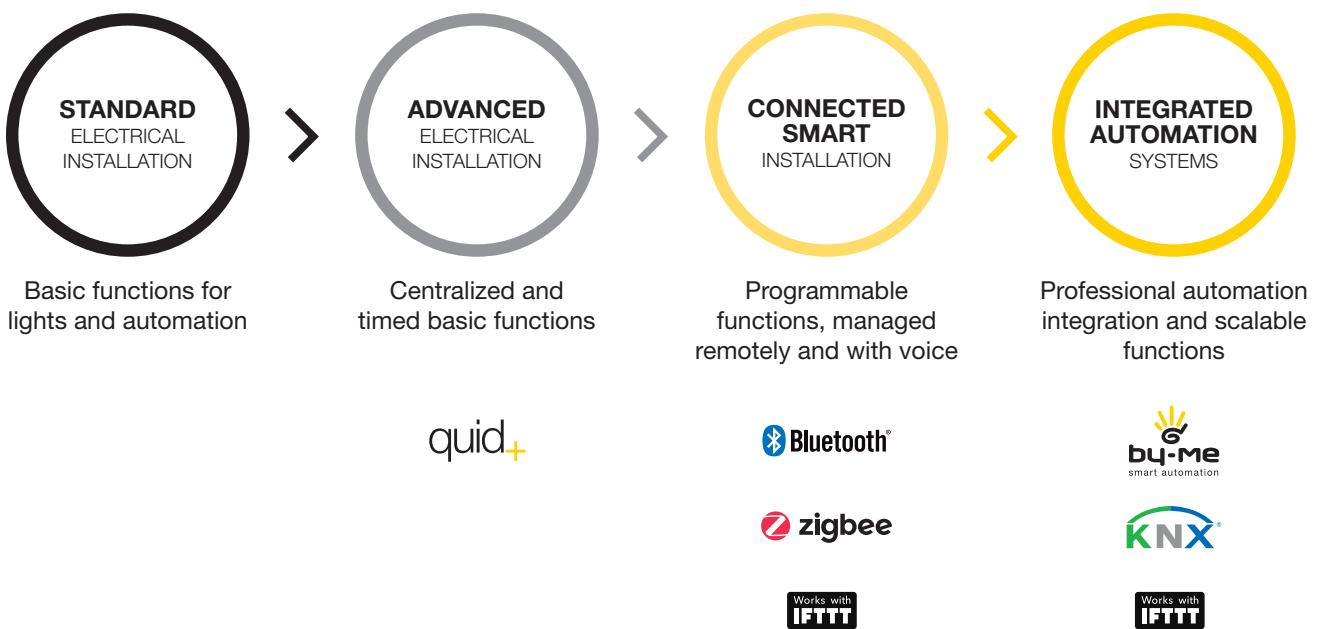Versatile technological solutions, from traditional systems to advanced automation systems e maximum integration and interoperability of all the functions. Complete synergy with protocols and international standards.



**ADVANCED
ELECTRICAL
INSTALLATION**



Scalable solutions. Advanced electrical installation

Innovative for controlling lights and rolling shutters, dedicated to traditional systems. Our expertise dedicated to traditional systems brings to life an innovative with easy and intuitive installation that evolves wired systems for maximum functionality and reliability.



quid+

QUID for lights. Innovative and silent relay.

Central control.

QUID offers the possibility of realizing a centralized shutdown control. It gives the opportunity of shutting down all lights with just a gesture. Furthermore, the presence of a pilot light reveals if the lighting is active in any other connected point.

More silent.

Differently from the standard electromechanical devices, the change of status turns out to be more silent, thanks to Vimar patented magnetic technology.

Safe.

If the push button remains active, the relay does not overheat because there is no electricity after the change of status.

Energy saving.

It does not consume energy, a benefit for energy saving and respect for environments.

QUID for roller shutters. Innovative electronic switch.

Centralized control.

The device controls the roller shutters and awnings enabling group control, deactivation of load at the end and preferred positions.

Reliable and safe.

It switches off the power at the end to avoid the motor to be in voltage and to be damaged.

CONNECTED
SMART
INSTALLATION

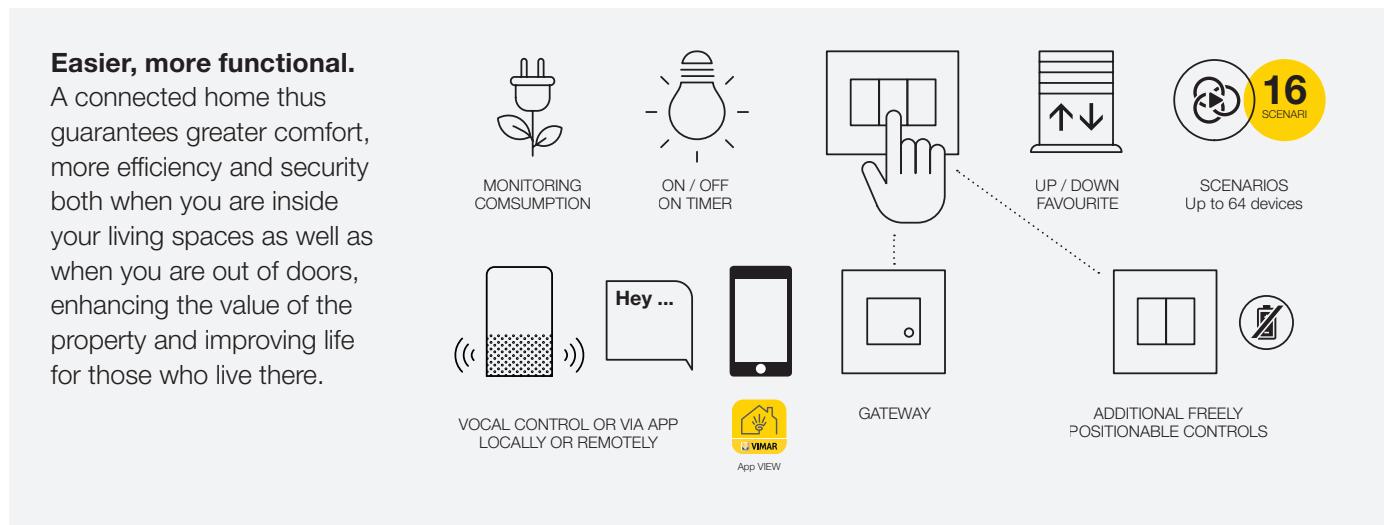
Activate
princess
scenario




Scalable solutions. Connected smart installation

The new View Wireless devices designed for Eikon, Arké and Plana can **manage lighting, roller shutters or motorised curtains, control energy consumption** and **manage scenarios**, with the utmost simplicity using classic 1-way switches, **via app or directly by voice**.

View Wireless can be adapted to any architectural context. Update, extend or replace your wiring system, you have the chance to make your home match, integrable over time. It is also ideal for renovations or to boost the functions of an existing system, and it is a useful means of support for the elderly and people with restricted mobility.



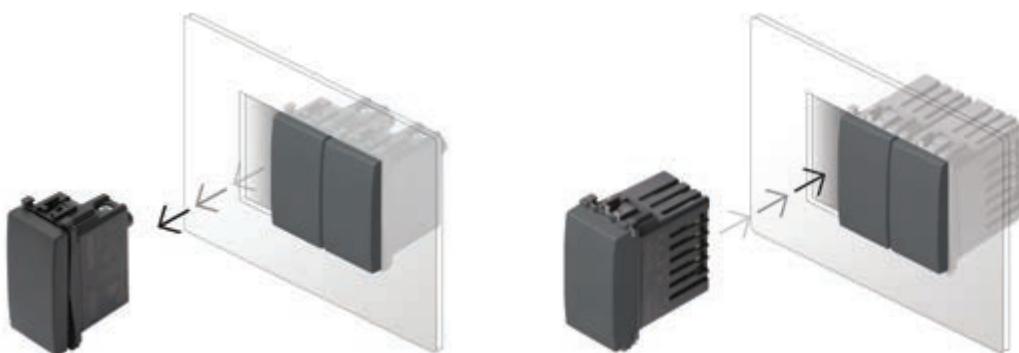
Update your space simply.
Just a few tasks. No need for masonry work. **New system, same shape.**



DUAL INTELLIGENCE. DUAL TECHNOLOGY

 **Bluetooth®**  **zigbee**

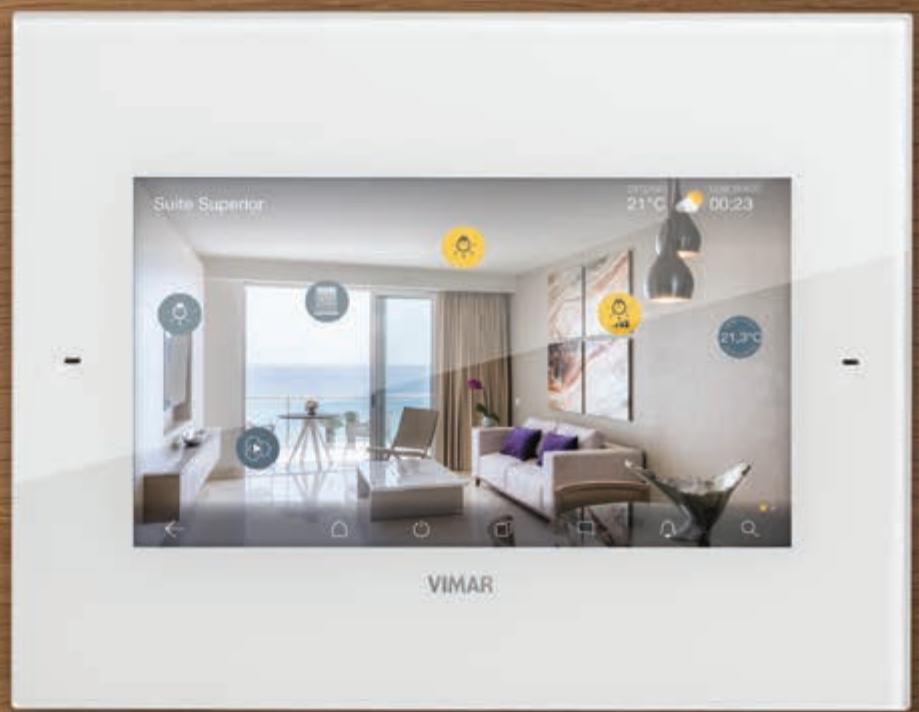**INTEGRATED
AUTOMATION
SYSTEMS**



PRIVATE VILLA

Scalable solutions. Integrated automation systems

By-me Plus is one of the main systems of the VIEW platform.

Focused on comfort and energy efficiency, it enables the user to control and perform the integrated management of the lighting, curtains and roller shutters, temperature and energy control of the building and the multi-room sound system.



More comfort.

Curtain and roller shutter automation, light dimming, sound system.

Managing the lighting and the sound system, moving curtains or roller shutters, dimming the lamps, or creating plays of coloured light. All through scenarios pre-set based on the user's requirements.

By-me Plus is easy installation and advanced technology, based on:

- Bus twisted pair cable
- linear, star and mixed wiring topology
- remote control via IP interfaces
- extendable with radiofrequency devices.

By-me Plus is simple configuration and diagnostics, maintenance thanks to the VIEW Pro app.

By-me Plus is smart management of comfort and energy efficiency thanks to the unique VIEW app.

Improved energy efficiency.

Managing energy more responsibly with evolved solutions capable of optimising the consumptions without losing out on quality, generating savings of up to 50% (according to a study performed by Milan Polytechnic University, IoT Observatory and in line with the EN 15232 standard).

Management of the loads to prevent blackouts due to over-loading and smart distribution of solar energy. Thanks to the possibility of viewing the consumptions, also remotely using the app, the user will always and promptly be aware of the energy profile of the home.

Temperature climate control.

Home energy supervision with measurement and viewing of consumptions (including non-digital ones).

Energy management and optimisation.

Smart management of the energy produced by a photovoltaic system is automatically carried on the appliances already selected, so reducing the amount of power used from the network.

INTEGRATED
AUTOMATION
SYSTEMS



Scalable solutions. Integrated automation systems



Each building has its own special needs, right from the very first design phases. The integrated automation systems increase the performance in terms of comfort and energy saving, making buildings smarter and prestigious. The Vimar systems stand out for their high level of **flexibility and scalability**.



Easy to configure thanks to the professional ETS software distributed by the KNX Association. The KNX devices for building automation can be operated together with all the products of companies that comply with the standard, ensuring a single integrated system that is connected to the world of the IoT via specific gateways or IP web-servers.



Flexibility & scalability.

- Integration with the standard control devices
- Modular devices with interchangeable buttons customizable with a wide range of symbols
- RGB touch thermostats for temperature control
- RFID access control reader with programmable entrances/exits
- Perfect aesthetic coordination with Eikon, Arké and Plana

Wide range of products & functions.

- temperature control
- dimmers for lighting control and scenario
- RFID MIFARE access control readers
- movement detector for lighting switching on and saving energy





International faces.

A limitless choice of standards, modules and installation types.

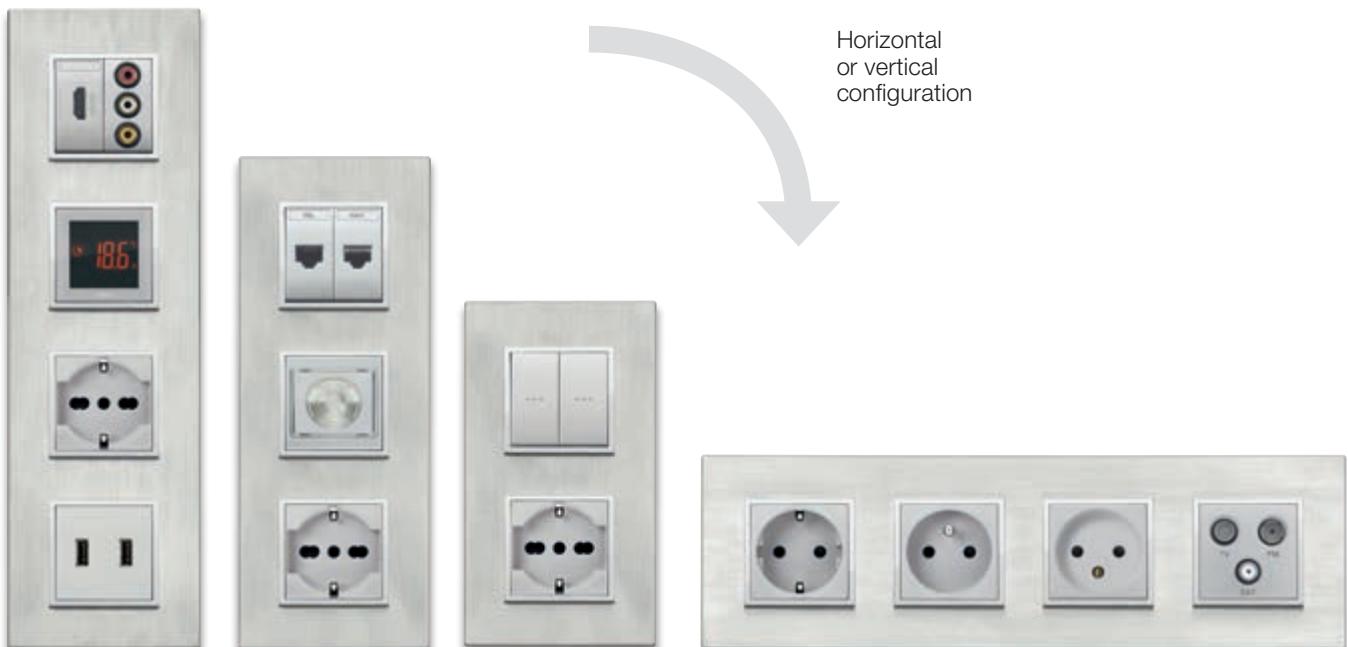
Vimar's positive energy goes a long way: thanks to the broad range of socket outlets and controls in compliance with the main international standards and also to modularity and installation versatility enable the **creation of tailored systems**.

Energy management solutions compatible with more than 100 countries worldwide.

To meet different installation requirements in different countries, our ranges includes a wide variety of devices that comply with the most widespread international standards and are highly versatile in modularity and types of mounting.

Versatile and modular solutions for different installation contexts.

Modular controls and socket outlets with Italian, English, French, German and American standards. Cover plates from 1 to 21 modules and multi-module, for horizontal and vertical installation, all this for customizing your installation in total safety and according to the international rules.



Wiring devices.

Catalogue

Eikon.

Catalogue section

Control devices	62
Power and signal socket outlets	80
Signalling, protection and detection	91
Comfort and climate	95
Stand alone and hotel solutions	96
Cover plates range	100
Installation types	122

Eikon

For your prestigious projects.

Each detail carefully studied to offer its own unique effect.





LIVING ROOM, PRIVATE VILLA



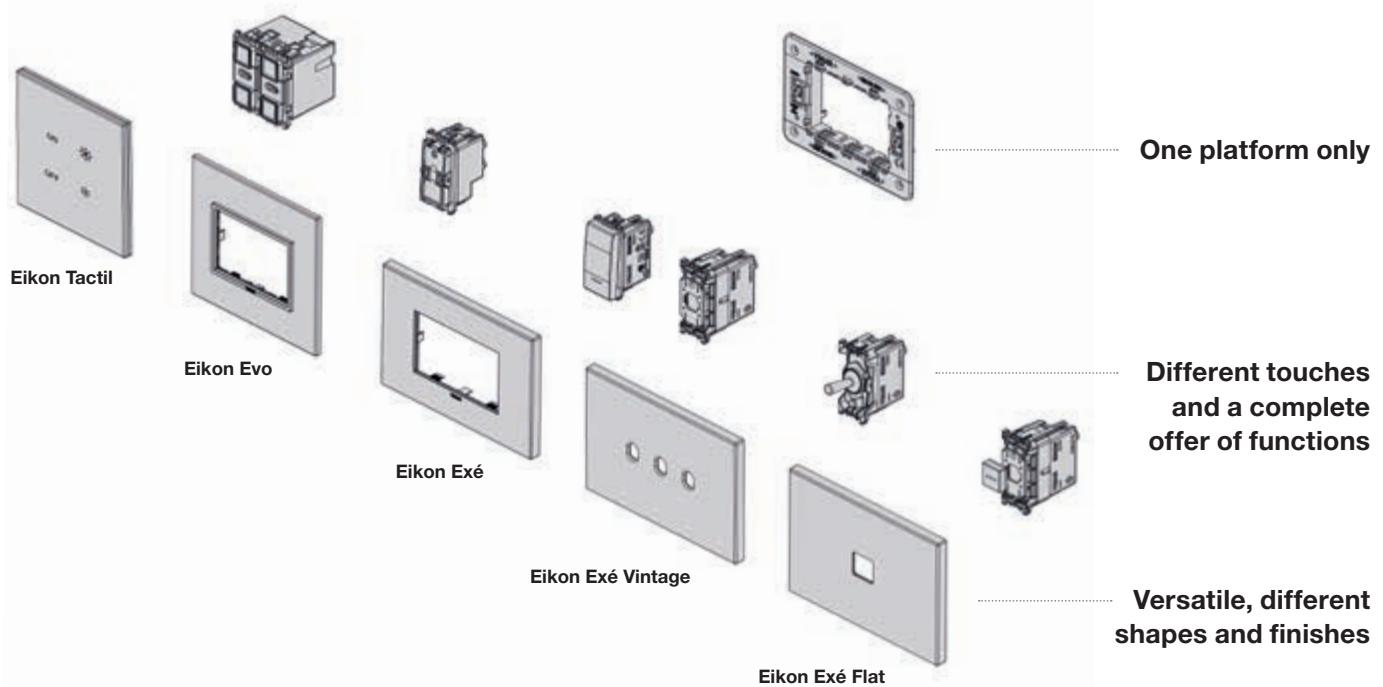
Flush wall mounting

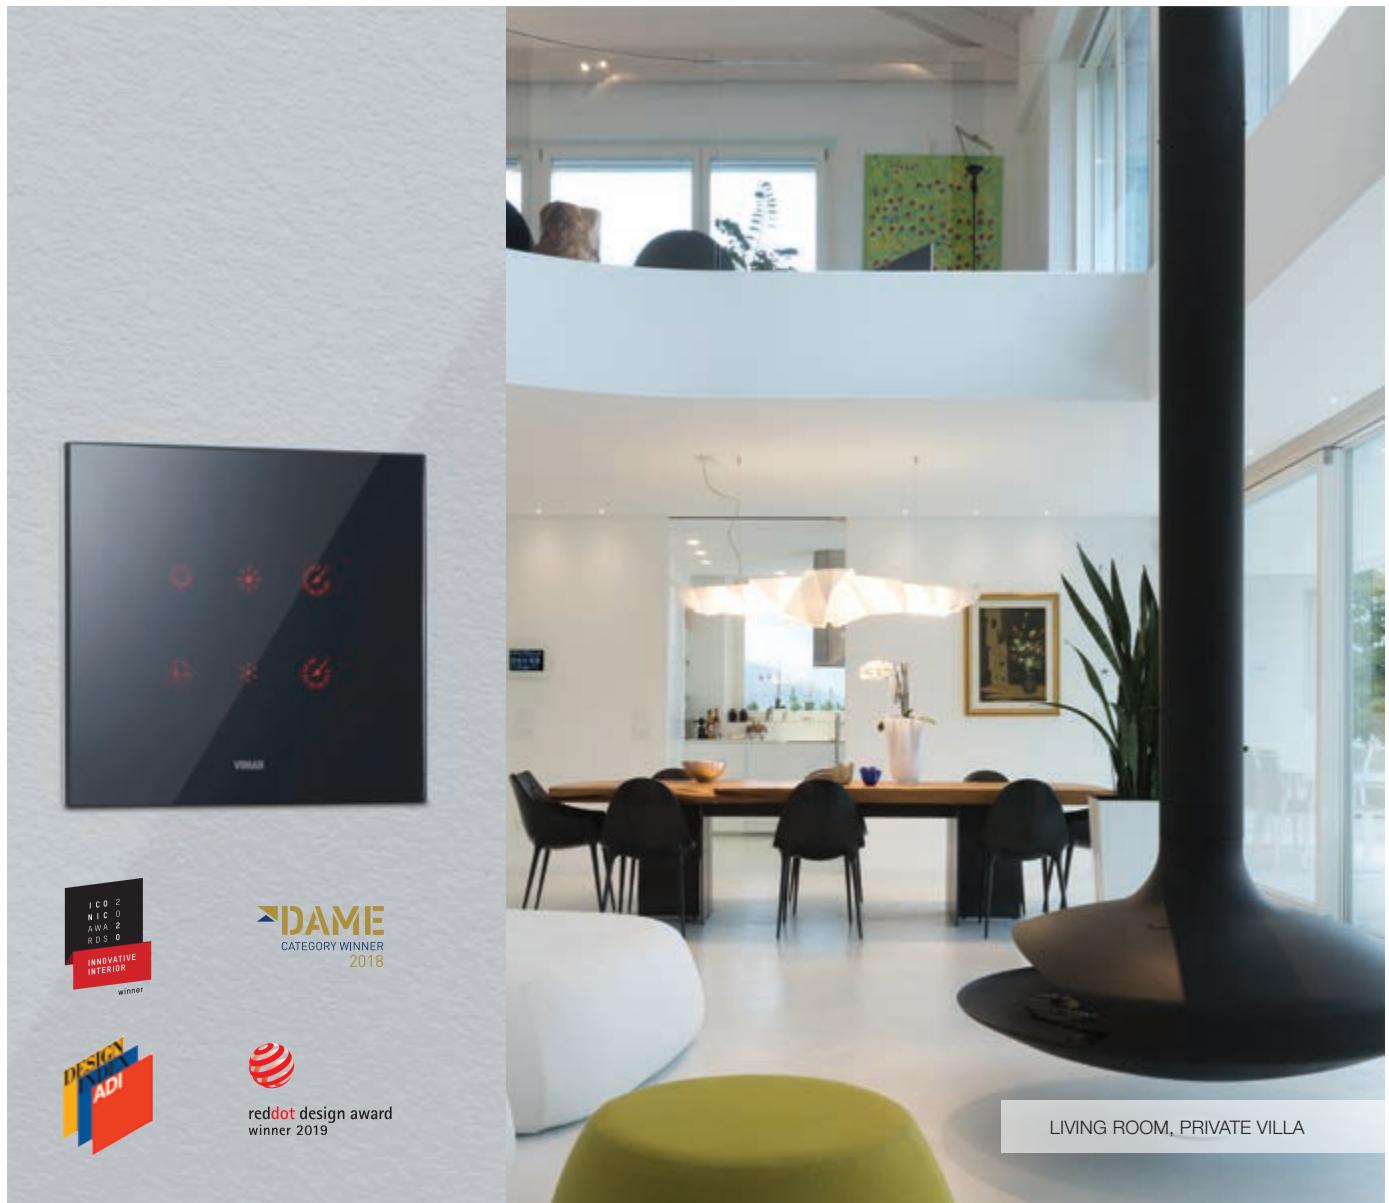
Eikon. One platform.

Multiple choices.

Bespoke Design.

Perfect co-ordination.





Eikon Tactil

A technological jewel. Exquisite finishing and functional elegance, transforming normal everyday gestures into special moments of pleasure. Transmitting unprecedented charisma to any room.

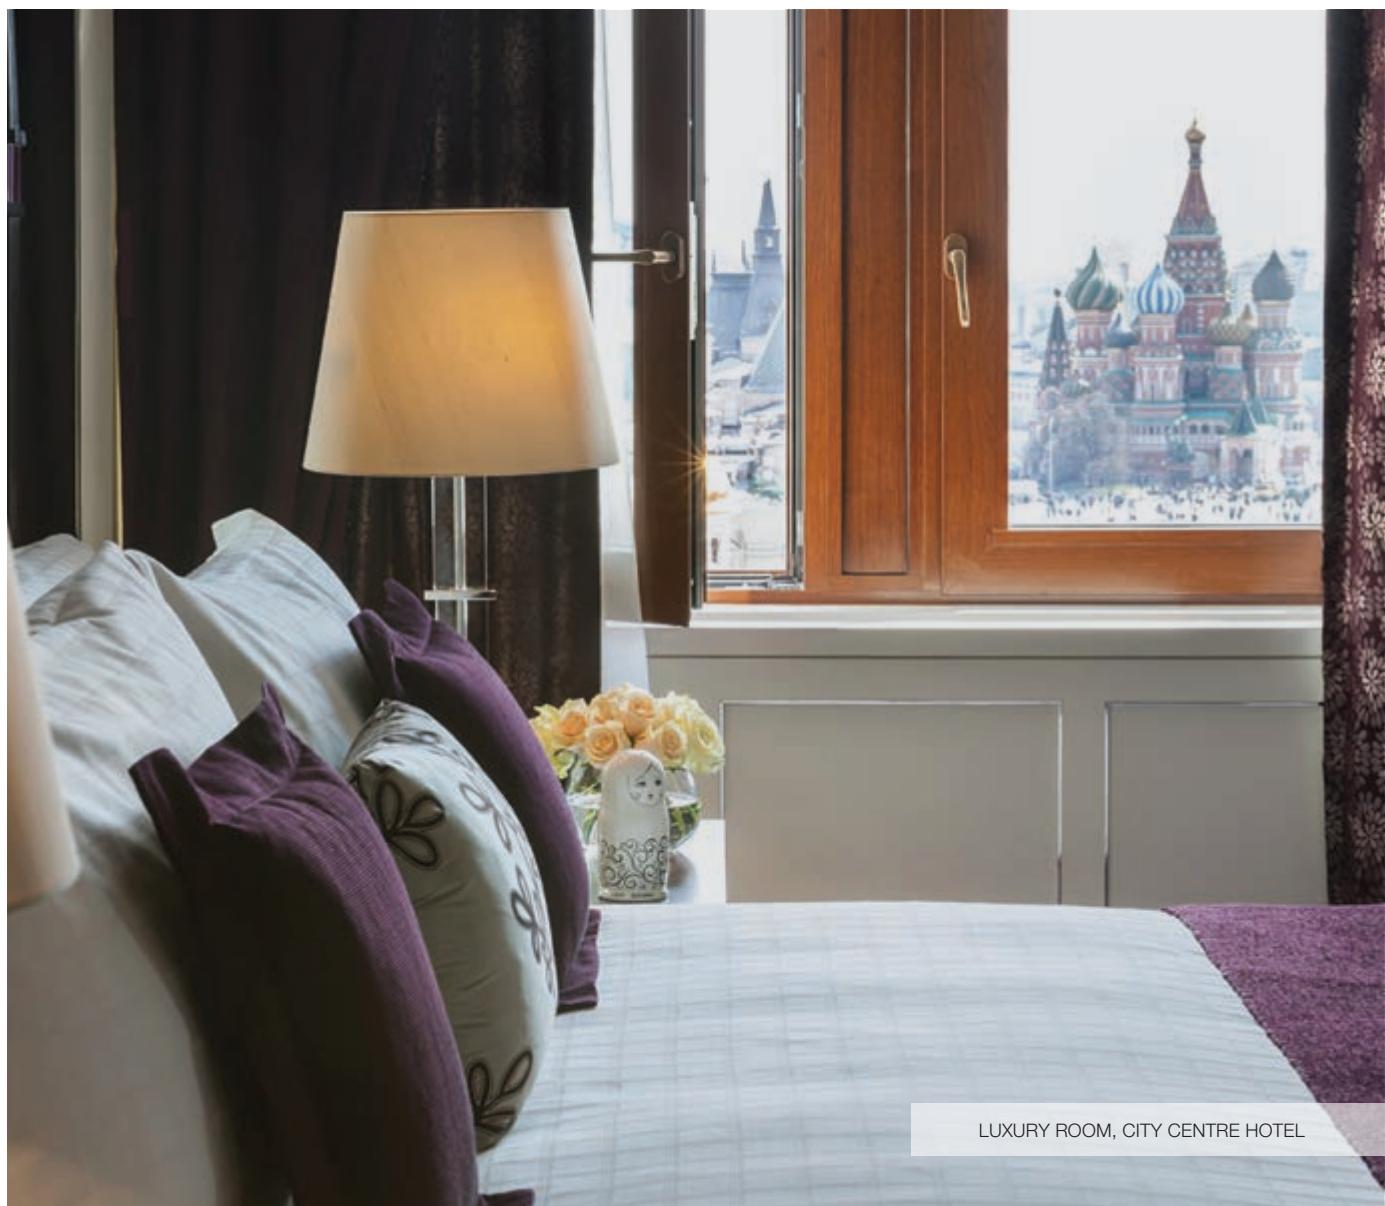
Touch function. Direct touch sensitive energy control. Sensitive to your presence: the command proximity sensor detects your approach and, without waiting for a command, activates the device: the commands light up, waiting for your touch.



Eikon Evo

Elegant geometries and chromed frame, the design of Eikon Evo captures the latest interior design trends and brings out the best Italian style. **Perfect aesthetic coordination with Eikon Tactil.**





Eikon Exé

The essence of shapes and materials. Squared corners and striking silhouettes give rise to a range that blends in seamlessly with any environment. Resulting from a meticulous selection process, different top quality finishes, which create a different, original soul each time: glass, leather, mirror, wood, marbled stoneware, brushed, shiny and exclusive metals.

The Collections range combine with the Eikon Exé cover plate: in the same finish offer a matching style, sophisticated yet at the same time pure and linear.




Eikon Exé The Collections

From the essence of Eikon Exé cover plates two new ranges are born: **Flat** and **Vintage**.

Flat. Planar and square-shaped controls create a pleasant flush-mounting effect. Provided with personalized RGB backlighting, controls can be elegantly laser-engraved with icons and pictograms.

Vintage. The toggle switches embrace mesmerising lines of the past restyling them with a modern twist providing an exclusive, slightly retro style.





Eikon Tactil. Materials and finishes

Luminosi (Bevelled crystal)

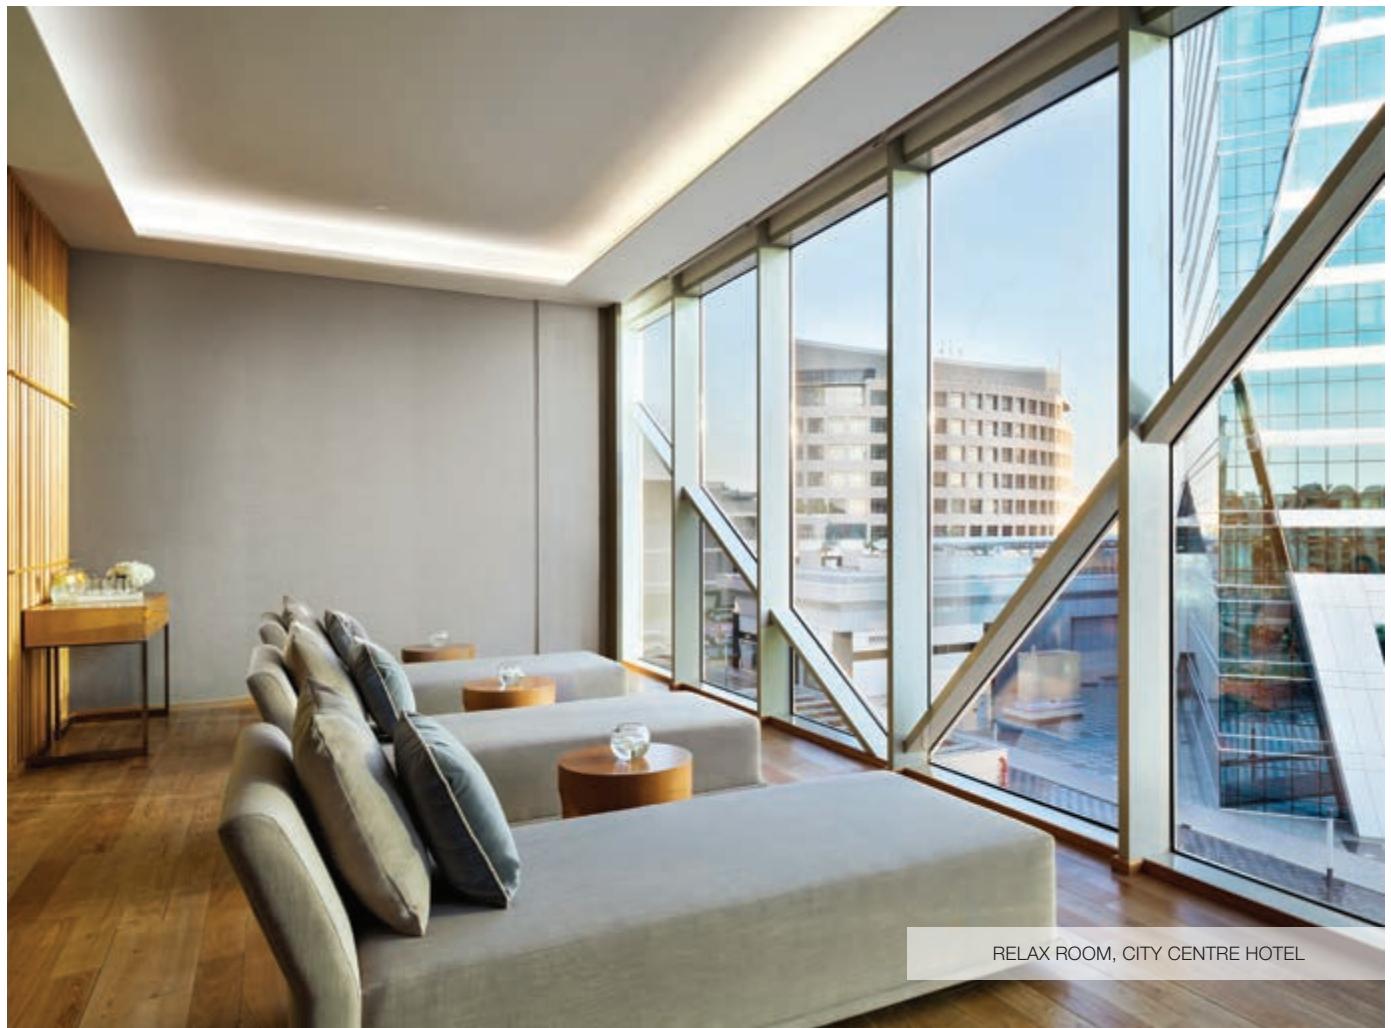
Purity and splendour like nothing else. Wrapped inside its luminous and delicate appearance lies unequalled vigour and strength: four of the different treatments used on crystal.



Scolpiti (Carved stone)

Strong and decisive, the quartzite is a unique material: clean cuts, from a quartz-based rock, with a refined look and natural beauty. Particularly resistant to wear and tear, it can be widely used both inside and outside buildings.





Naturali (Solid Wood)

Three different woods: Italian walnut, with an intense dark brown; white oak, clear and fresh with distinctive veining; wengé, dark, warm and powerful like its homeland Africa. A prized and luxurious material featuring unique grains that vary from piece to piece.



Raffinati (Natural leather)

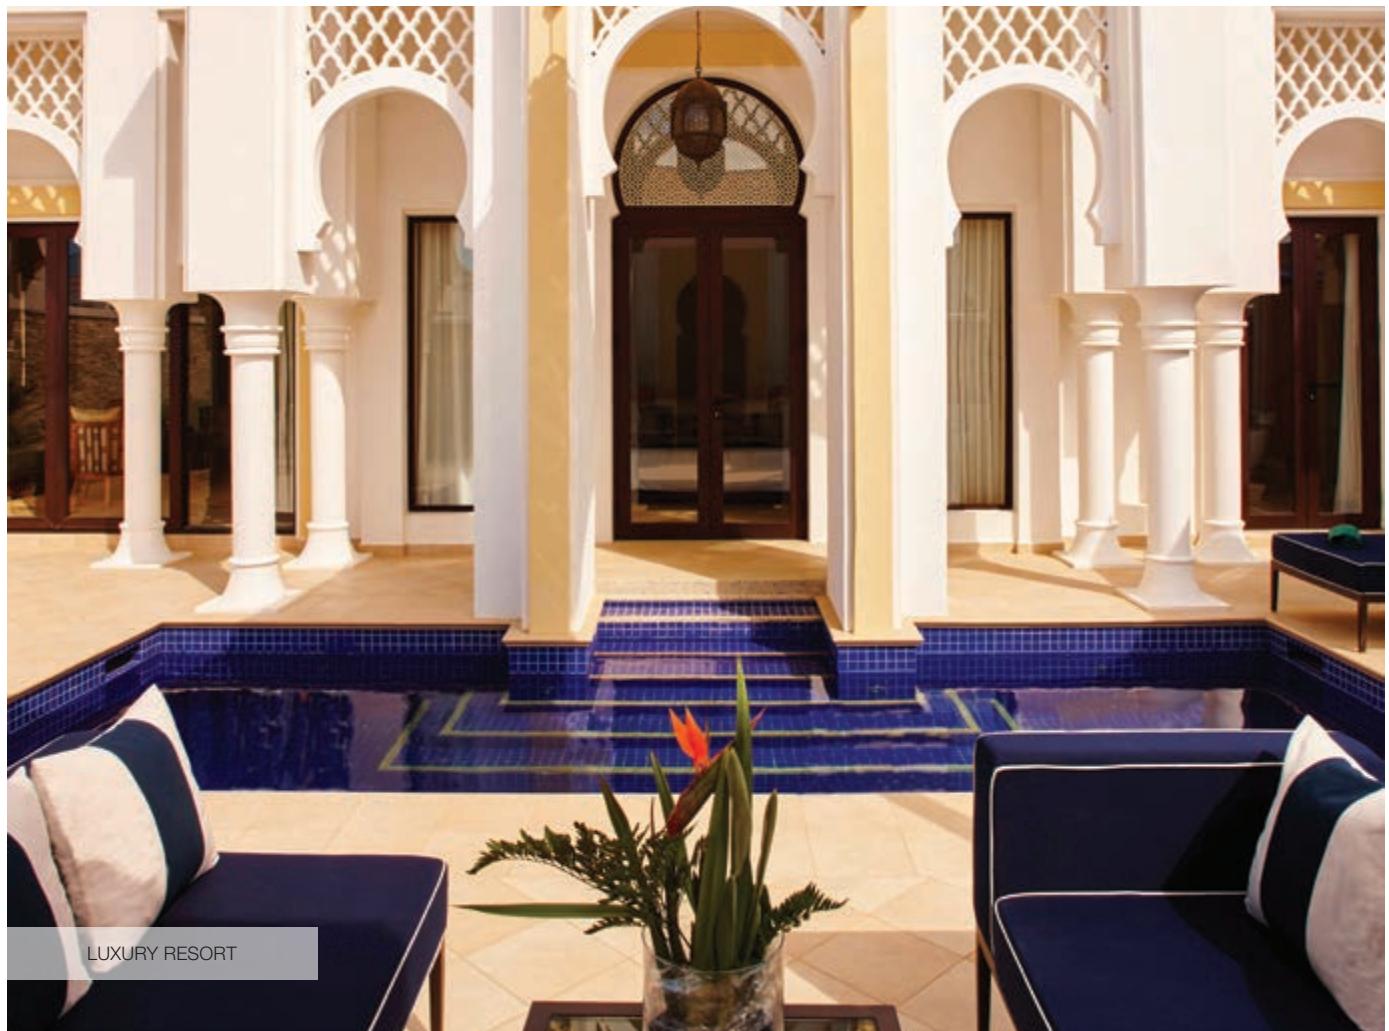
Soft to touch and attractive to look at. Subjected to wear and tear over time, the cover plates in natural leather are available in two different shades (Cream and Tobacco) that convey the glamour of a genuinely natural material characterised by small imperfections.



Speciali (Corian®)

A unique finish (Glacier ice) with an eclectic personality that enhances every context. A latest-generation material with a clean look and technological feel that seduces at first glance with its contemporary minimalism.





Eikon Evo. Materials and finishes

Primari (Anodized aluminium)

With their innate stylishness and unfailing allure, presences at once discreet and prestigious, lines both tasteful and confidently defined: discover the five different shades of anodized aluminium.

Esclusivi (Refined aluminium)

Highly original appearances, noble personalities, irresistible appeal. Rare and therefore precious characters: the declensions of enhanced aluminium need only one glance to assert their priceless values.

Scolpiti (Carved stone)

Strong, rigorous by nature, bold cuts without compromising richness and refinement: three basic character traits of worked stone.

Naturali (Solid Wood)

Natural wood projects vitality and immediately transmits a pleasurable sensation of calm and warmth. Simple natural qualities.





Eight different approaches to being, living and expressing luxury. Eikon Evo's stylistic options take their inspiration from the latest interior design approaches, distilling their essences and interpreting them in original and personal ways through unusual combinations of materials, colours and finishes. Offering you choices on who to be and how to appear.

Luminosi (Bevelled crystal)

Purity and splendour like nothing else. Wrapped inside its luminous and delicate appearance lies unequalled vigour and strength: seven of the different treatments used on crystal.



Raffinati (Natural leather)

Pure appeal. The delicate harmonious shapes highlight the marriage of sophistication with genuine naturalness. A beauty with a life of its own, immune to passing time, is evident in both these varieties of leather.



Speciali (Corian®)

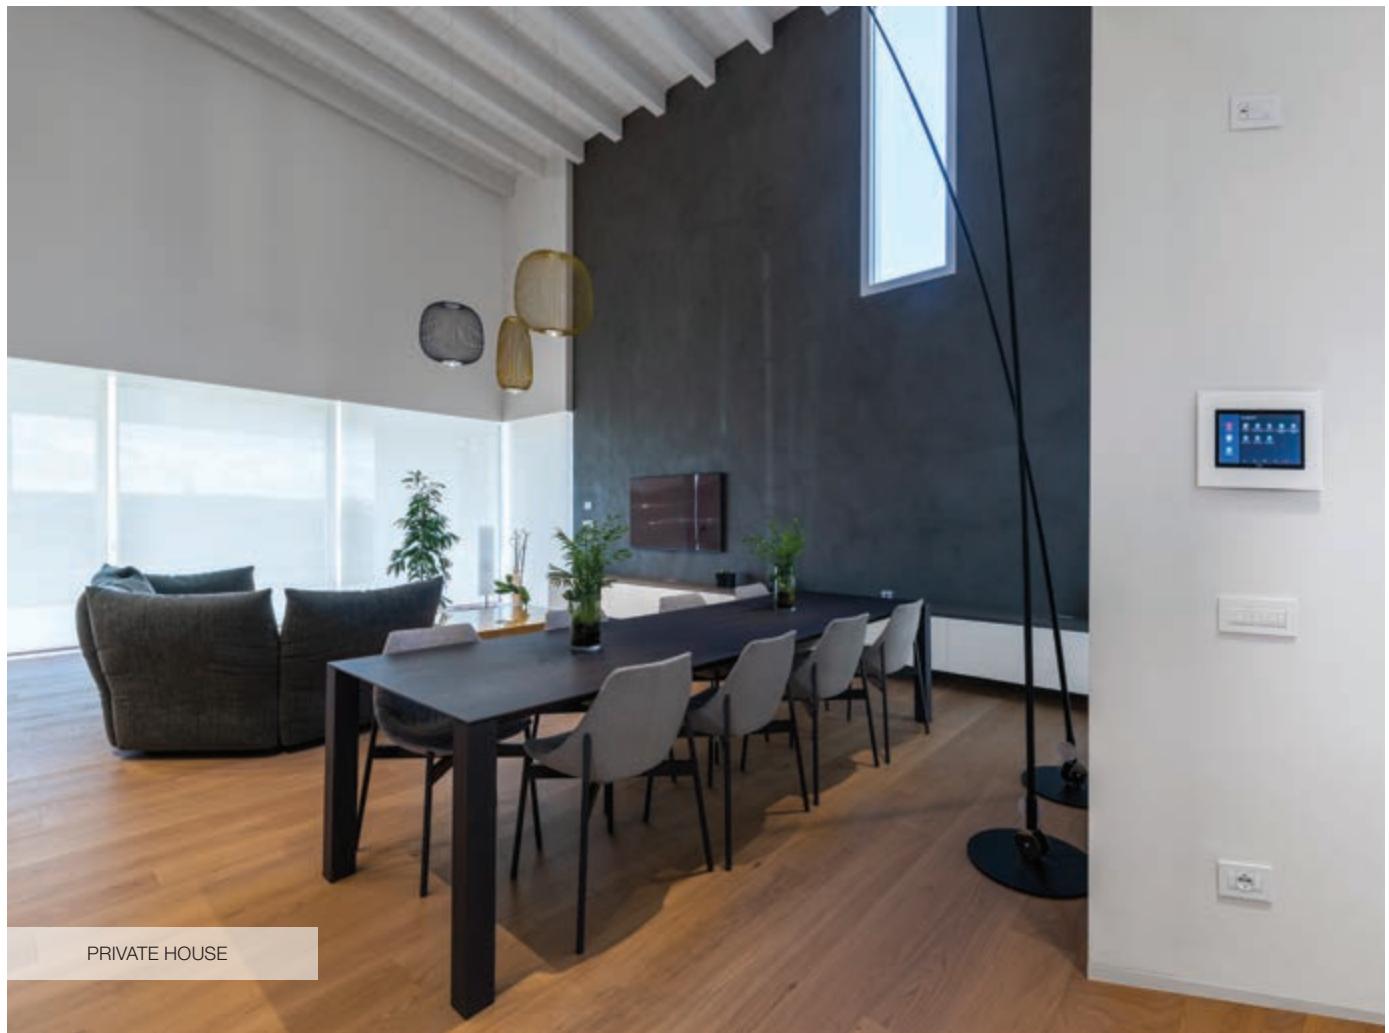
Innovation and intrinsic strength, this is a material that seduces through shining colours which signal its cutting-edge hi-tech content.



Essenziali (Total aluminium and crystal)

Clean and clear harmonies: four partnerships between aluminium with crystal, a quartet of elegant variations.





Eikon Exé. Materials and finishes

Glass

Transparencies and tricks of light. Back-painted surface and flush-ground polished edges are available in three designs: the classic appeal of Milky White, the warmth of Canvas White, the timeless elegance of Satin Black.



Mirrors

Reflections and lights that interact with the interiors. Reflective surfaces emphasised by a polished edge flush-grinding process. A splash of technology for the Ice Silver finish, an enveloping hue for Shiny Bronze and a warm tone and satin-finish for Opal Brown.



Marbled stoneware

Inspired by the textured strength of marble, with elegant flaws and characteristic veining. White Calacatta like the finest Carrara marble; Coffee Brown, a warm colour with golden vein patterns; Black Marquiña just as powerful as the namesake Spanish stone.



Exclusive and Brushed metals

The elegance of Antique Gold, the energy of Brushed Copper and the variegated shades of Antique Brushed Bronze. The tactile nature of the material is enhanced by a delicate finish on the surfaces in three versions: Brushed Nickel, Brushed Dark Bronze, Brushed Black.





Materials selected to stand the test of time, innovative production processes and typically Italian attention to finishes. A perfect combination that offers a product of outstanding style designed to enhance every space with its most unique expression.

Wood

The warmth and vitality of the ultimate natural material. Three different natural wood finishes. The lighter shade of Oak, the warm shades of American Walnut and the typical mottling of Eucalyptus.



Leather

A natural and live material, that is soft and sophisticated, unique in its slight imperfections. Classic tones with a highly tactile appeal. Savannah with its natural look, the more matt and velvety Steppe, and the fine grained and sophisticated Black Forest.



Total Look metals

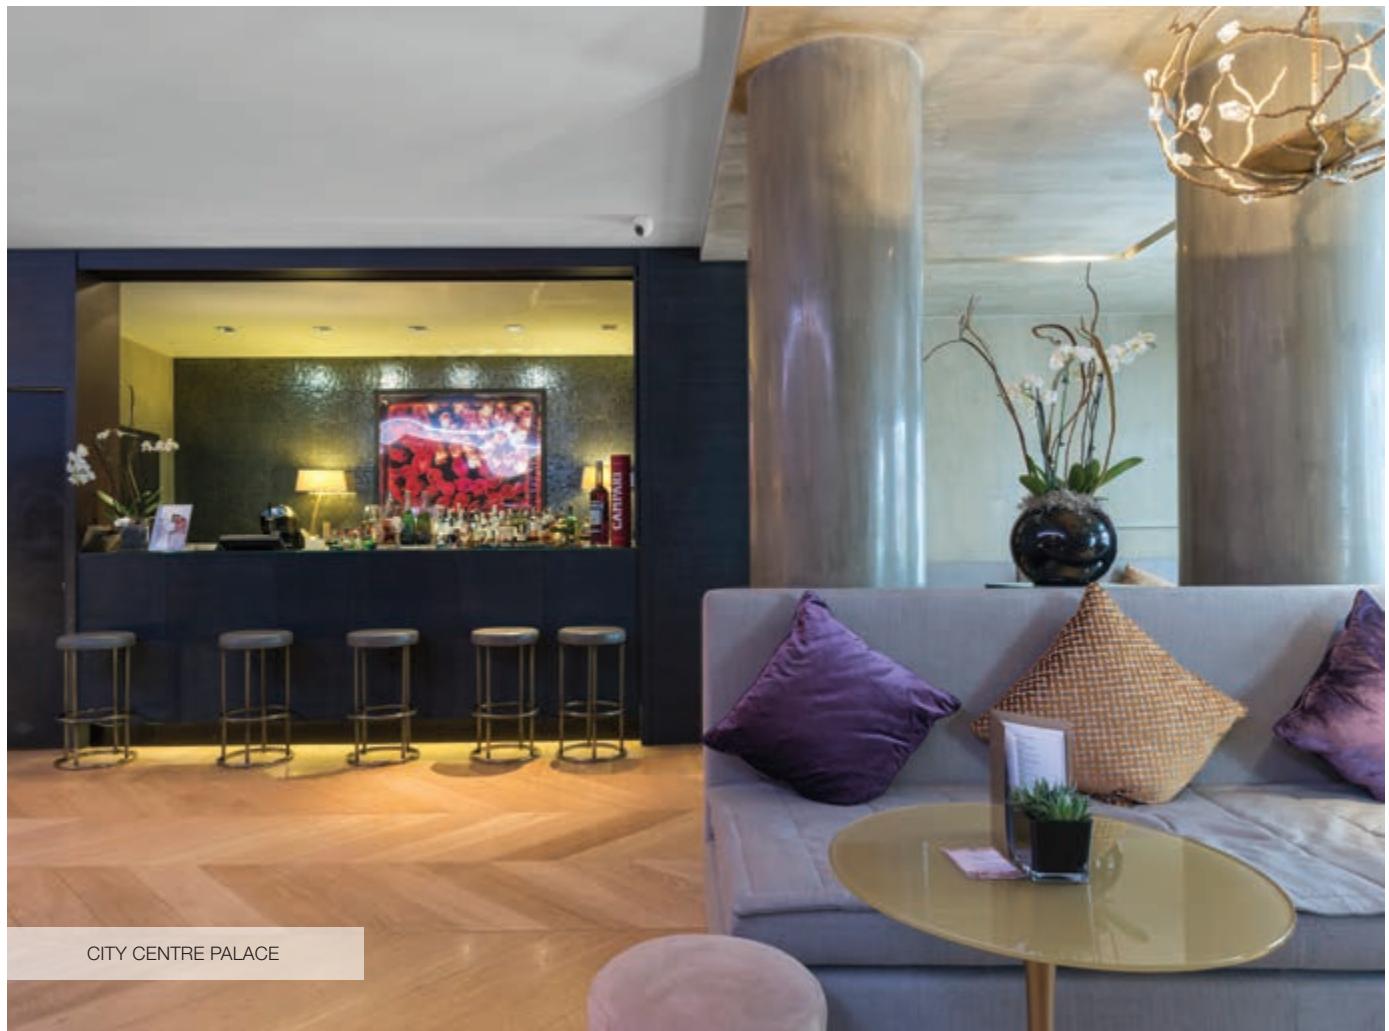
Styling continuity and discrete tones for total immersion. Barely there elegance. Three timeless colours: Matt White, Next and Anthracite Grey to match the buttons of the same colour. Simplicity in its purest form.



Polished metals

Shiny glints to brighten up the environments. The gaze loses itself in an alluring shiny surface. A shiny finish lights up the modern appeal of Nickel, shows off the charm of Gold and underscores the aesthetic accuracy of Black Chrome.





CITY CENTRE PALACE

Eikon Exé. **The Collections.** The strength of metal in five elegant colours

Total look metals

Antracite Grey and
Matt White.



Brushed metals

Brushed Nickel and
Brushed Dark Bronze.



Polished metals

Gold.





DINING ROOM, LUXURY HOTEL

Easy solutions to live better. Smart comfort

USB SOCKET OUTLETS

The type A connector has now been supplemented with the type C one, the new technological standard used to power and charge latest-generation devices. Ideal in hotel rooms and offices.



UNIVERSAL AND RGB DIMMERS

Used to adjust the brightness of LED and low consumption (CFL) lights and play with the colours of RGB lamps. This way, savings and the right atmosphere can shine as one.



INFRARED 1-WAY SWITCH

Without touching the switches with your hands, the 1-way switch infrared motion sensor turns the lights on and off only when necessary. Or as someone passes or at dusk. Ideal for optimising electricity consumption levels and to avoid contact with the lighting device.



WI-FI ACCESS POINT

The network signal reaches every corner of the house. The ideal solution to extend your Internet connection throughout your home, even to areas that are not reached by the Wi-Fi signal or where the signal is weaker, providing coverage to all rooms.



TOUCH TIMER-THERMOSTAT

For optimum climate control and programmable from smartphone via By-clima app. With RGB backlighting for colour coordinated controls. Temperature and humidity probes are also available.



Easy solutions to live better. Easy safety and security

SOCKET OUTLETS WITH SICURY PROTECTIVE SHUTTER

The SICURY safety shutter, which Vimar patented in 1968, is an automatic mechanism that closes the holes in the socket outlet when the plug is removed; this stops foreign bodies from being inserted, preventing accidental contact with live parts.



INTERLOCKED SOCKET

Cuts off the power supply in the event of an overvoltage, to keep people safe.

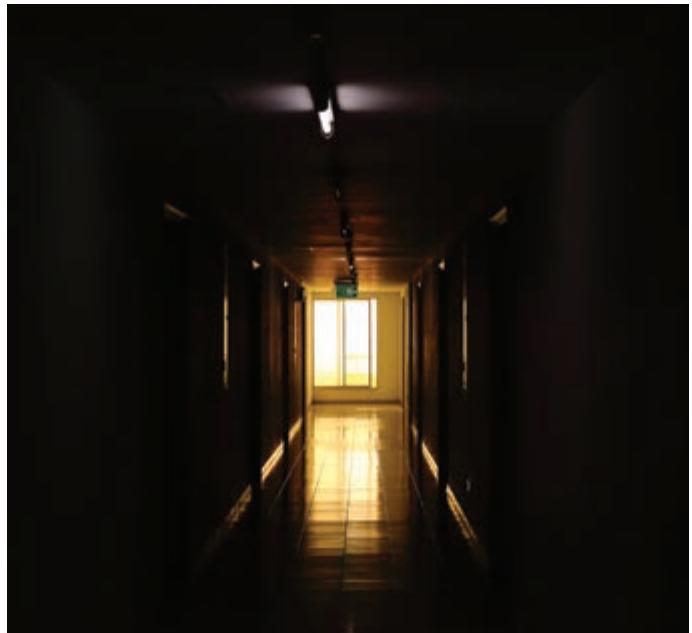


BIMBI SICURY




EMERGENCY LAMP AND GAS DETECTOR

The emergency lamp comes on in the event of a blackout to guide you safely in the dark. With a technology hyper-sensitive to gas leaks, the detector reports them, blocks them and describes the fault.



SIGNAL AND MULTIMEDIA SOCKET OUTLETS

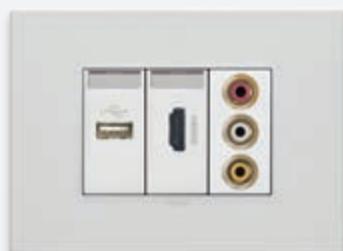Eikon enables the connection of electronic devices and the transmission of digital signals through copper or fibre-optic data sockets, telephone socket outlets, USB data ports and RCA and TV-RD-SAT sockets; they all guarantee fast, safe connections to a high quality standard.



SAFE TOUCH. CHOOSE ANTBACTERICAL SOLUTIONS

In hospitals, working and public places, hygiene is vital. Technopolymer cover plates and buttons are treated with silver ions to prevent the spread of germs.



ANTIBACTERIAL

REDUCTION OF
90 %
OF GROWTH
OF **BACTERIA**



Stand-alone and expandable solutions with a vast range of devices

RADIOFREQUENCY CONTROLS

With no power supply or batteries, they can be mounted on any surface, even wood or glass. No masonry work, there is no need for flush mounting boxes. Ideal for renovations, redevelopments and updates, or any installations which have regulatory or architectural constraints.



LISTEN TO MUSIC

The Bluetooth wireless technology receiver incorporated in the 4+4 W amplifier exploits the Bluetooth technology on your smartphone to connect quickly to your home stereo system or, on holiday, the system in your hotel room.



BY-ALARM BURGLAR ALARM SYSTEM

By-alarm can be integrated both with the **By-me Plus home automation system** which, through an IP interface, guarantees a secure and protected connection, locally and remotely and with the wide range of products of **Elvox CCTV**. The versatility and scalability, combined with high technology and simplicity of use, makes them suitable for small apartments as well as shopping malls and business centres, up to large industrial companies.



QUID FOR LIGHTING CONTROL

An innovative magnetic relay that connects the silence of traditional electronic devices to the reliability of the electromechanical ones. It introduces new evolved functions, like the opportunity of centralizing the lighting out with just a gesture and with only one cable. Furthermore, the presence of a pilot light reveals if the lighting is active in any other connected point.



QUID FOR ROLLER SHUTTERS CONTROL

This new switch offers the possibility of automating curtains or roller shutters and enabling group control, disconnecting the load at the end of the activation and memorizing the favourite position and the user can recall it whenever he wants. A performing solution created in the name of functionality and comfort.



Mounting features for Eikon Tactil

3-module installation

Cover plates.

Large, square size, from 2 to 4 modules. In crystal and 4 colours: white diamond, aqua, pearl grey and black diamond.



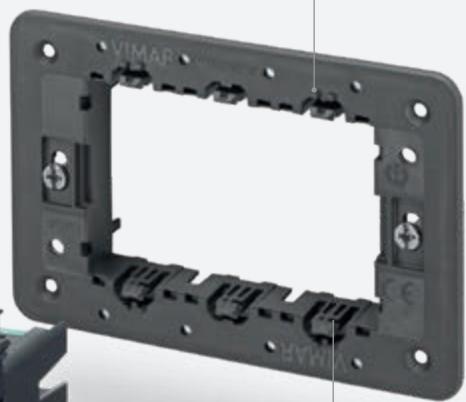
Electronic controls.

1, 2 and 3 back-lit modules. The standard controls have amber backlighting when installed in a conventional electrical system. The backlighting can be programmed with RGB colours when mounted in a By-me or Well-contact Plus automation systems.



Mylar adhesive labels.

The controls can be customised using the Mylar adhesive labels with a range of symbols, all back-lightable.




Ultra-slim support.

Steel core just 2 mm thick, with galvanised protection, for installation with minimum stand-out.

Plack-clack system.

The Vimar-patented Plack-clack system fixes quickly and easily the lighting point components to the cover plate by inserting and removing the devices from the front.


Composition	Box	Frame	Device	Cover plate
			  2 x 1-module ¹ 1 x 2-module ¹	
			   1- and 2-module ¹ 3 x 1-module ¹ 3-module ¹	
			   2 x 1-module and 1 x 2-module ¹ 4 x 1-module ¹ 1- and 3-module ¹	

* For other combinations, see the installation types from page 122

¹ To customise with Mylar adhesive labels (21847)

Mounting features for Eikon Evo

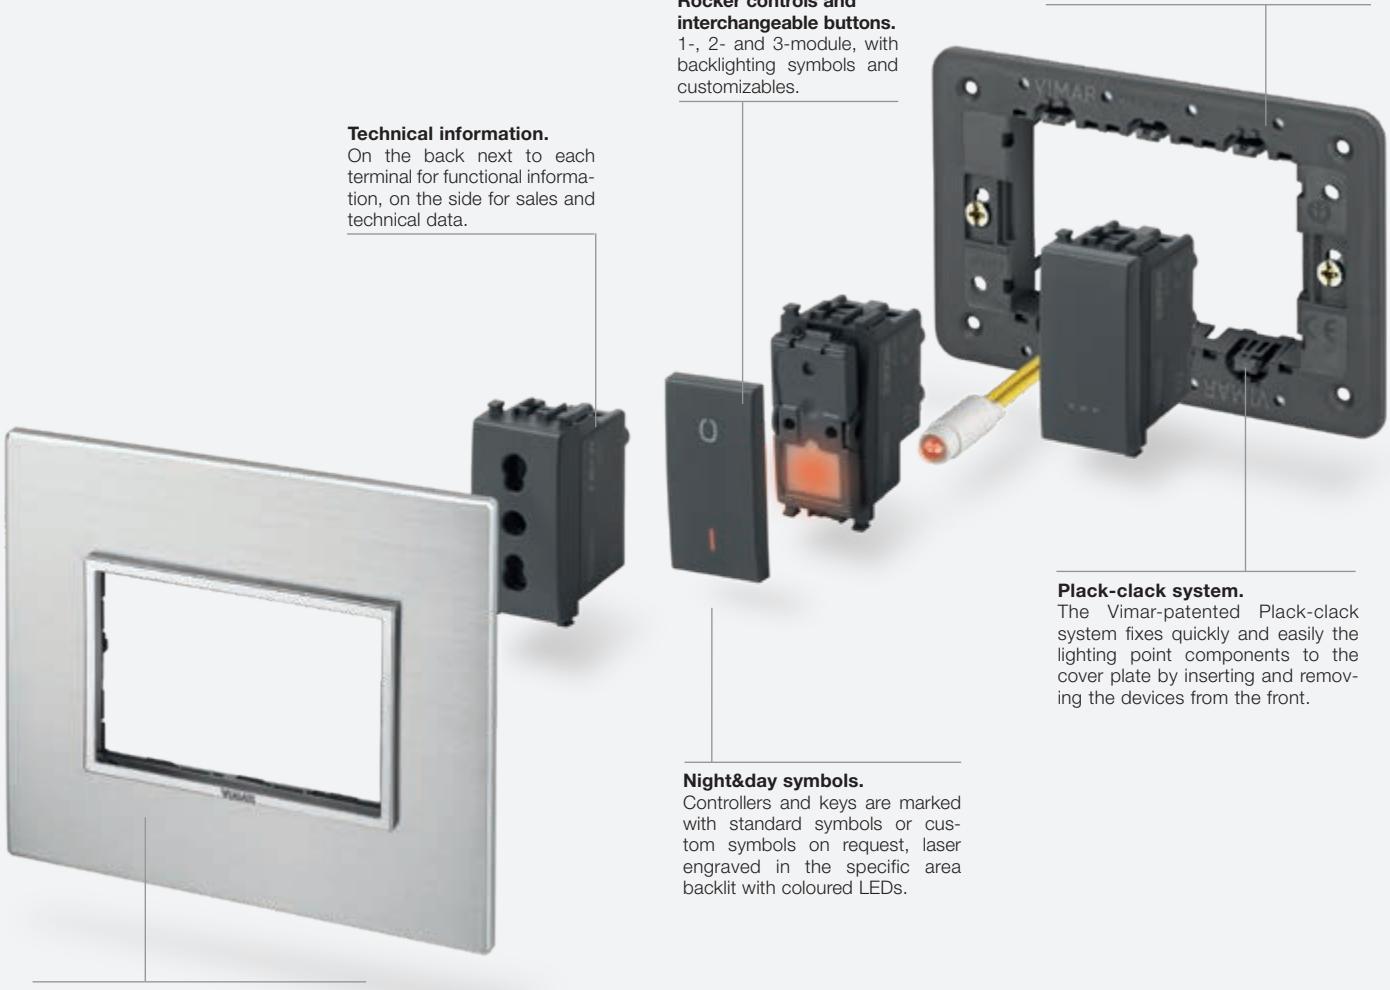3-module installation



SCREWLESS TERMINALS

For solid, stranded and flexible cables. Quick, easy and safe.

The quick-wiring terminals can hold rigid, semi-rigid and flexible cables, responding to all installation needs. Secure fastening is assured for both signal circuit cables with cross-section 0,5-2,5 mm² and power circuit cables with cross-section 1,5-2,5 mm².






SCREW TERMINALS

Ergonomic contacts.

The metal plate in the terminals is curved: a Vimar refinement allowing the wire to be held in place until clamped with the screw. Secure fastening is assured for both signal circuit cables with cross-section 0,5-2,5 mm² and power circuit cables with cross-section 1,5-2,5 mm².














Composition	Box	Frame	Device	Cover plate
 2 modules	 Flush mounting ø 60 mm or 56x56 mm	 2-module with/without screws or with claws	 2 x 1-module  1 x 2-module	 2 modules
 From 3 to 7 modules	 Flush mounting from 3 to 7 modules	 With screws	 3 x 1-module  1- and 2-module  1 x 3-module	 From 3 to 7 modules*
 10" IP touch screen	 Semi-flush mounting			 Cover plate for 10" IP touch screen
 4,3" touch screen	 Flush mounting	 With screws	 4,3" touch screen  2 x 1-module and 1 x 2-module  4 x 1-module	 8 modules cover plate*
 4,3" IP touch screen			 4,3" IP touch screen	 8 modules cover plate*, rotated at 90° angle

* For other combinations, see the installation types from page 122

Mounting features for Eikon Evo

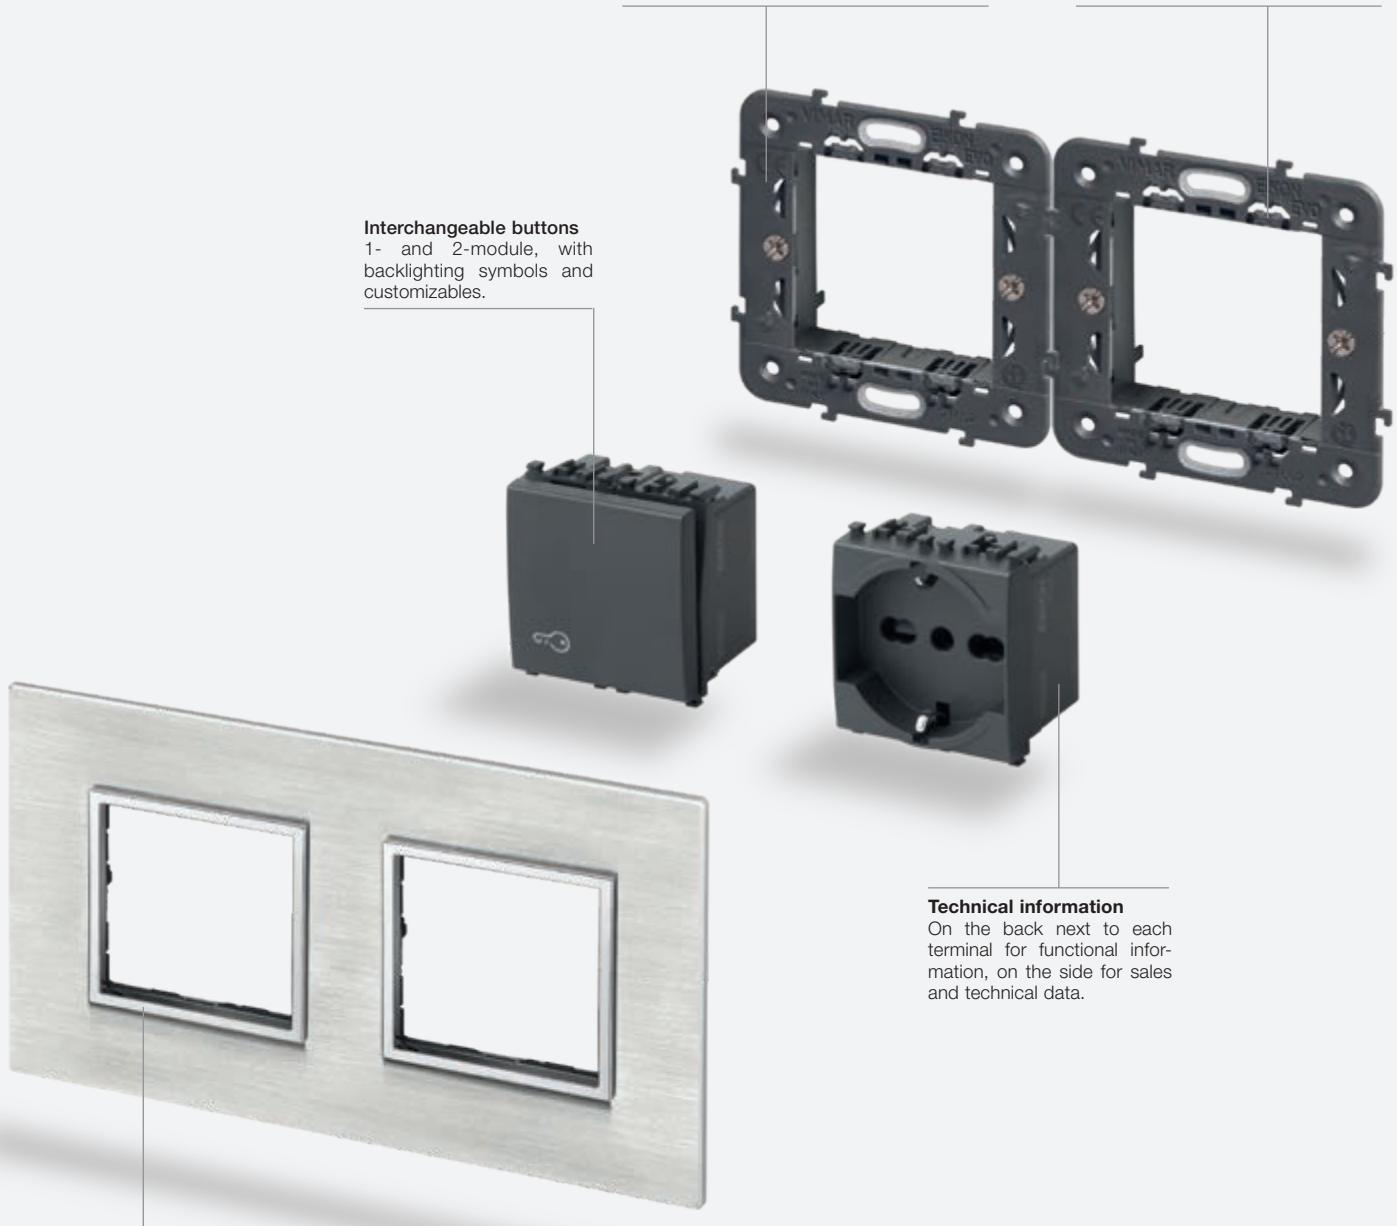Installation with 71 mm distance between centres
(German and French standard)



Composition	Box	Frame	Device	Cover plate
	 With/without screws with 71 mm between centres		2 x 2 modules	
	 With/without screws with 71 mm between centres		3 x 2 modules	
	 With/without screws with 71 mm between centres		4 x 2 modules	
	 With/without screws with 71 mm between centres		3 x 2 modules	
	 With/without screws with 71 mm between centres		4 x 2 modules	

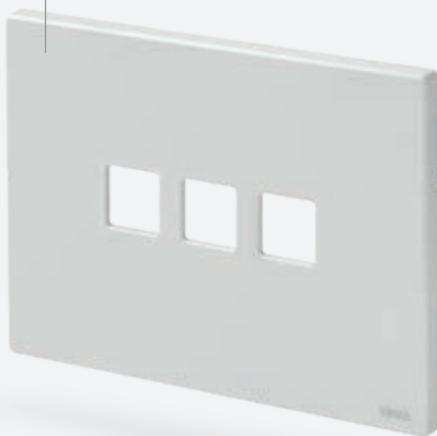
* For other combinations, see the installation types from page 124

Mounting features for Eikon Exé

Eikon Exé Flat

Cover plates.

The essence of minimalism, from 2 to 4 modules and from 1 to 8 gangs. Metal in 5 different colours.



Controls.

Electromechanical and home automation controls, to complete with interchangeable buttons.



Ultra-slim support.

Steel core just 2 mm thick, with galvanised protection, for installation with minimum stand-out.



Plack-clack system.

The Vimar-patented Plack-clack system fixes quickly and easily the lighting point components to the cover plate by inserting and removing the devices from the front.

Interchangeable buttons.

With backlit symbols in 5 different colours for a perfect coordination between buttons and cover plates.

Eikon Exé Vintage

Cover plates.

The modern essence of the retrò, fascinating lines of the past, from 2 to 3 modules and from 1 to 3 gangs, in special metal finishes



Ultra-slim support.

Steel core just 2 mm thick, with galvanised protection, for installation with minimum stand-out.




Plack-clack system.

The Vimar-patented Plack-clack system fixes quickly and easily the lighting point components to the cover plate by inserting and removing the devices from the front.

Controls.

Electromechanical controls, highly performing and aesthetically coordinated.



Composition	Box	Frame	Device	Cover plate
Eikon Exé Flat				
 2 modules for 1 conventional switch	 Flush mounting ø 60 mm or 56x56 mm	 1-module without screws/with claws		 2 modules for 1 conventional switch*
 2 modules for 4 home/KNX automation devices	 Flush mounting ø 60 mm or 56x56 mm	 2-module without screws/with claws		 2 modules for 4 home/KNX automation devices
Eikon Exé				
 3 modules for 3 conventional switches	 Flush mounting	 With screws		 3 modules for 3 conventional switches*
 from 3 to 4 modules for 6 or 8 home/KNX automation devices	 Flush mounting from 3 to 4 modules	 With screws		 from 3 to 4 modules for 6 or 8 home/KNX automation devices*
Eikon Exé Vintage				
 2-gang, 2 modules	 Flush mounting ø 60 mm or 56x56 mm	 2-module without screws/with claws		 2-gang, 2 modules*
 3-gang, 3 modules	 Flush mounting	 With screws		 3-gang, 3 modules*

* For other combinations, see the installation types from page 128

Mounting features for Eikon Exé

3-module installation

Cover plates.

Large, square size, from 2 to 7 and 4+4 modules. In 6 precious materials and a wide range of colours.

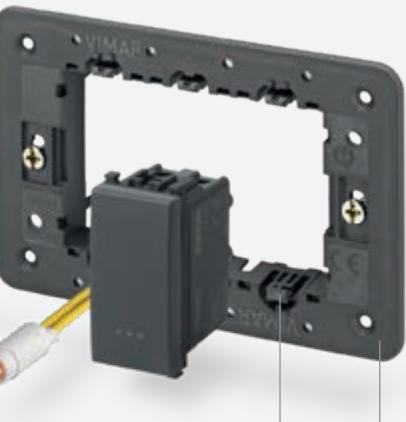


Technical information.

On the back next to each terminal for functional information, on the side for sales and technical data.

Rocker controls and interchangeable buttons.

1-, 2- and 3-module, with backlighting symbols and customizables.



Plack-clack system.

The Vimar-patented Plack-clack system fixes quickly and easily the lighting point components to the cover plate by inserting and removing the devices from the front.

Night&day symbols.

Controllers and keys are marked with standard symbols or custom symbols on request, laser engraved in the specific area backlit with coloured LEDs.

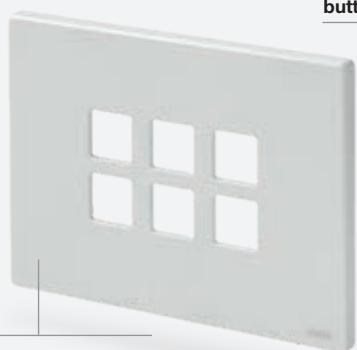
Ultra-slim support.

Steel core just 2 mm thick, with galvanised protection, for installation with minimum stand-out.

Flush mounting in plasterboard walls - flat design



The minimalism of Eikon Exé is enhanced with a special box that enables the flush mounting of the devices (cover plates, controls and frame) into the wall, especially in plasterboard walls.



Cover plates.

The cover plate when installed is totally flush to the wall.

Interchangeable buttons.





Flat controls.
For home automation, KNX and conventional controls



Special box for plasterboard.


For flush mounting, available from 2 to 7 modules.



Composition	Box	Frame	Device	Cover plate
 2 modules	 Flush mounting ø 60 mm or 56x56 mm	 2-module with/without screws or with claws	 2 x 1-module  1 x 2-module	 2 modules
 From 3 to 7 modules	 Flush mounting from 3 to 7 modules	 With screws	 3 x 1-module  1- and 2-module  1 x 3-module	 From 3 to 7 modules*
 4,3" touch screen	 Flush mounting	 With screws	 4,3" touch screen  2 x 1-module and 1 x 2-module  4 x 1-module	 8 modules cover plate*
 4,3" IP touch screen			 4,3" IP touch screen	 8 modules cover plate*, rotated at 90° angle

* For other combinations, see the installation types from page 126

Mounting features for Eikon Chrome

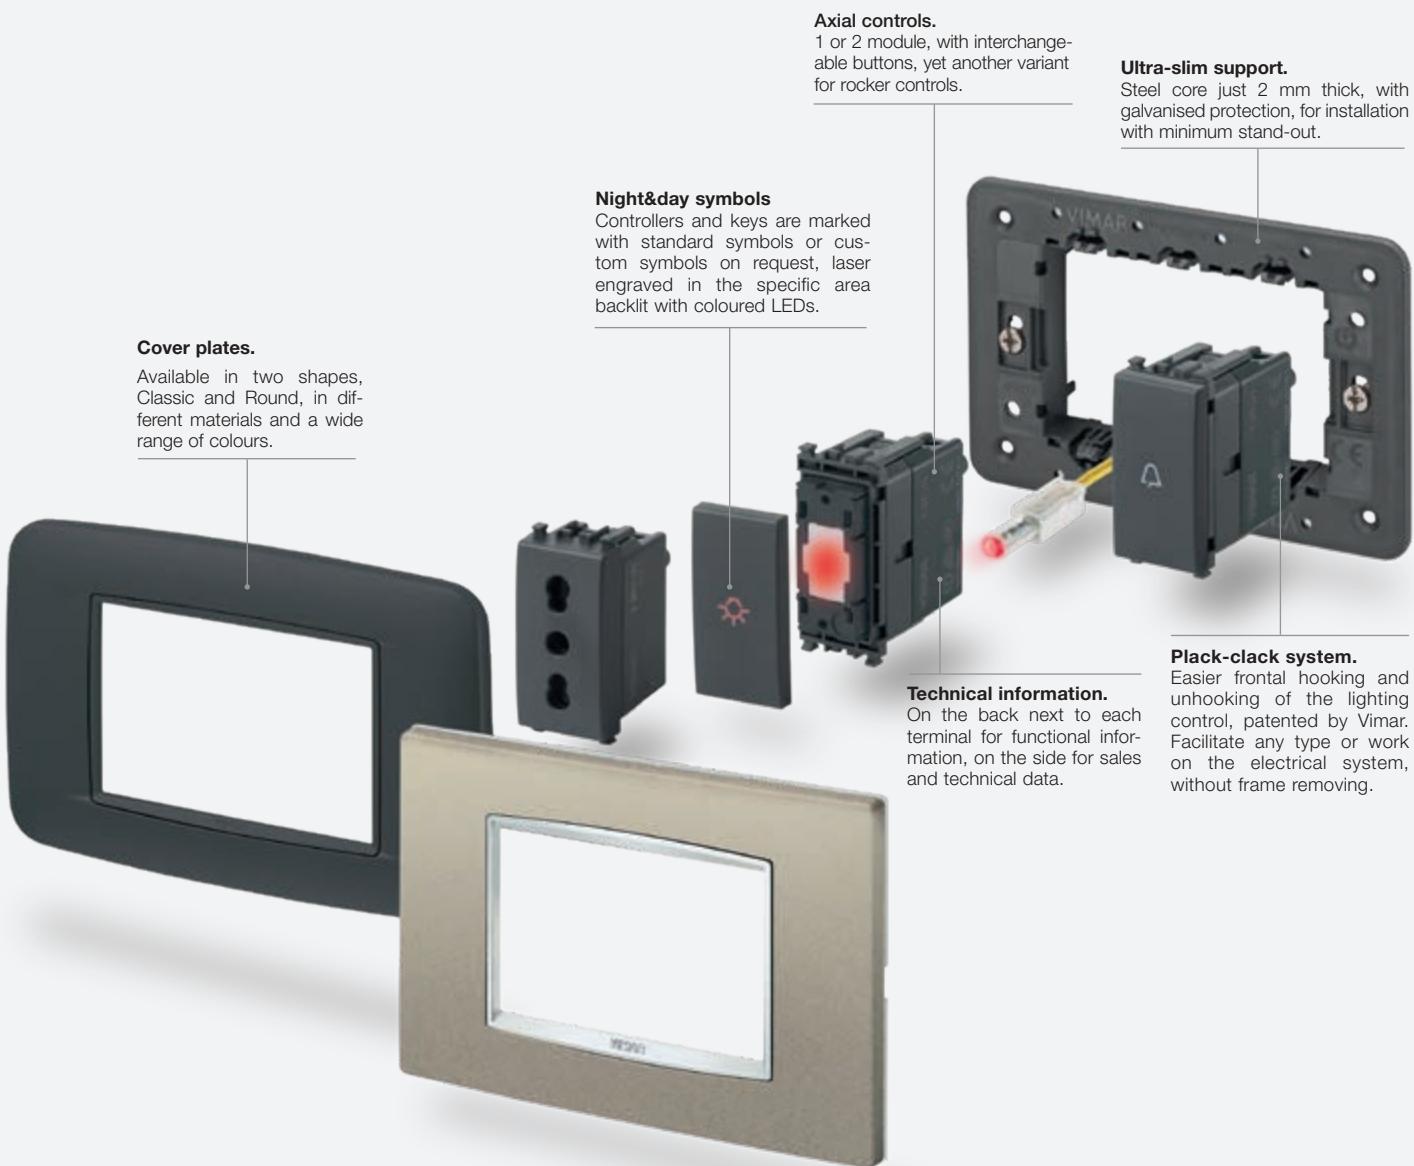3-module installation



Composition	Box	Frame	Device	Cover plate
	 Panel mounting	 With screws	 1-module	 From 1 to 2 modules Classic or Round* (only for Total Look)
	 Flush mounting  Surface mounting	 2-module with/without screws or with claws	 2 x 1-module  1 x 2-module	 From 1 to 2 modules Classic or Round*
 	 Flush mounting  Surface mounting	 With screws	 2 x 1-module  2-module  1 and 2-module  3 x 1-module  1 x 3-module	 2-central-module Classic or Round*  From 3 to 7 modules Classic or Round*
	 Flush mounting	 With screws	 4.3" touch screen  2 x 1-module and 1 x 2-module  4 x 1-module	 8 modules Classic or Round*
		 With screws	 1 and 3-module	 4 and 7 modules Classic or Round*

* For other combinations, see the installation types from page 132

Mounting features for Eikon British standard

Modular devices mounting






Monobloc device (with built-in mounting frame)



Joining possibility with minimum 25 mm of distance between boxes

Due to the graphic layout, the product photos are not represented with equivalent proportions.

Composition	Box	Frame	Device	Cover plate
 1 module, modular mounting (1-gang)	 1-gang mounting box Fixing centres: 60,3 mm			From 1 to 2 modules*
 2 modules, modular mounting (1-, 2-, 3-gang switch)	 1-gang mounting box Fixing centres: 60,3 mm		  	From 1 to 2 modules*
 monobloc device or 3 modules modular mounting	 1-gang mounting box Fixing centres: 60,3 mm		  	  
 monobloc device or 5 modules modular mounting	 2-gang mounting box Fixing centres: 120,6 mm		 	

* For other combinations, see the installation types from page 136

Devices

EIKON TACTIL

Blank modules


**21041**

Blank module.
Depth: 11 mm

Electronic devices

**21119**

NO 6 A 230 V~
relay output,
supply voltage
230 V~ 50/60 Hz.
Depth: 42,5 mm

**21126**


6 independent push buttons,
8 non-polarised inputs, 7 solid
state outputs for non-polarised
contacts, 9-32 VDC power supply
- 3 modules. Depth: 22,8 mm

**21174**

For cosφ 0,6 2 A
230 V~ roller
shutters laths
adjustment.
Depth: 42,5 mm

**21122**

2 push buttons
for the remote control
of a single or
centralized control.
Depth: 42,5 mm

**21125**

8 non-polarised inputs, 7 solid
state outputs for non-polarised
contacts, 9-32 VDC power
supply, for external/internal hotel
room or cabin applications
- 3 modules. Depth: 22,8 mm

230 V~ 50 Hz dimmers


**21134**

MASTER, 40-500 W, 40-300 VA,
CFL 10-200 W, LED 3-200 W.
Depth: 42,5 mm

By-me Plus - Electronic devices

**▲21520.1**

4 independent push buttons
or 2 rocker buttons,
4 independent RGB LEDs
- 2 modules. Depth: 38 mm


**▲21540.1**

6 independent push buttons
or 3 rocker buttons,
6 independent RGB LEDs
- 3 modules. Depth: 38 mm

Well-contact Plus - Electronic devices

**21840**

4 independently programmable
buttons for single controls or
scenes, KNX standard
- 2 modules. Depth: 38 mm

**21860**

6 independently programmable
buttons for single controls or
scenes, KNX standard
- 3 modules. Depth: 38 mm

Labels

**21847**

8 sheets of stickers with
symbols and words for
Eikon Tactil devices

**21847.1**

4 sheets with labels featuring
symbols and wording for external/
internal hotel room or cabin functions
for Eikon Tactil controls


**21847.2**

4 sheets of stickers with
symbols and words for
Eikon Tactil devices

**21846**

8 sheets with adhesive labels with
numbers for room numbering to
customise Eikon Tactil cover plates

Well-contact Plus - Access control system

**21457.1**

Eikon Tactil touch transponder card reader,
KNX standard, 2 relay outputs NO 4 A 24 V~,
2 inputs, 12-24V~ 50/60 Hz and 12-24 Vdc (SELV)
- 3 modules. Supplied without transponder card.
Depth: 36,5 mm

**21666.70.01**

Electronic plate for 21457.1,
white diamond - 3 modules

**21666.71.01**

Electronic plate for 21457.1,
aqua - 3 modules


**21666.76.01**

Electronic plate for 21457.1,
black diamond - 3 modules

Devices

EIKON TACTIL

Well-contact Plus - Access control system

**21457**

Eikon Tactil touch transponder card reader, KNX standard, 2 relay outputs NO 4 A 24 V~, 2 inputs, 12-24V~ 50/60 Hz and 12-24 Vdc (SELV) - 3 modules. Supplied without transponder card. Depth: 36,5 mm

**21666.70**

Electronic plate for 21457, white diamond - 3 modules

**21666.71**

Electronic plate for 21457, aqua - 3 modules

**21666.73**

Electronic plate for 21457, pearl grey - 3 modules

**21666.76**

Electronic plate for 21457, black diamond - 3 modules

**■ 21666.53**

Electronic plate for 21457, grey quartzite - 3 modules

**■ 21666.31**

Electronic plate for 21457, italian walnut - 3 modules

**■ 21666.32**

Electronic plate for 21457, white oak - 3 modules

**■ 21666.33**

Electronic plate for 21457, wengé - 3 modules

**■ 21666.21**

Electronic plate for 21457, cream - 3 modules

**■ 21666.22**

Electronic plate for 21457, tobacco - 3 modules

**■ 21666.41**

Electronic plate for 21457, glacier ice - 3 modules

Examples of Eikon Tactil custom controls



Eikon Tactil



Eikon Tactil control with adhesive labels 21847...

Available symbols in labels 21847

(Some symbols are repeated several times)

Repetition	10	1	1	1	1	5	5	1	2	1	1	8
Repetition	3	2	4	5	2	4	1	1	1	3	3	2
Repetition	1	1	1	1	1	1	1	3	1	1	1	2
Repetition	1	1	1	1	1	1	1	1	1	2	2	1
Repetition	1	1	2	2	2	2	2	2	2	2	2	1
Repetition	1	1	1	1	1	1	1	2	2	1	2	2
MAKE UP ROOM												
DO NOT DISTURB												
GENERAL												
ALARM												
LUCE												
LIGHT												
BAGNO												
BATHROOM												
OPEN												
CLOSE												
ESTERNO												
SCALE												
STAIRS												
GARAGE												
GIARDINO												
GARDEN												
TERRAZZA												
TERRACE												
OUTSIDE												
ATTIC												
SOLAIO												
CANTINA												
CELLAR												

Available symbols in labels 21847.1

(Some symbols are repeated several times)

IN	OUT						ON	OFF	ALARM	---		DO NOT DISTURB
Repetition	10	10	4	10	10	8	8	2	2	8	8	8
MAKE UP ROOM												

Available symbols in labels 21847.2

(Some symbols are repeated several times)

Repetition	2	5	5	6	6	3	3	5	1	4	1	1
Repetition	4	2	5	5	2	5	3	2	2	6	4	2
LIGHT												
OUTSIDE												
TV												

ON												

Available symbols in labels 21846

(Some symbols are repeated several times)

0	1	2	3	4	5	6	7	8	9
Repetition	80	15	15	15	6	6	6	6	5

Devices

EIKON EXÉ FLAT

Electromechanical devices



22104

Axial 1P 10 AX 250 V~
2-way switch mechanism.
Depth: 39,5 mm



22108

Axial 1P NO 10 A 250 V~
push button mechanism.
Depth: 39,5 mm

By-me Plus - Devices



01480.AX

4-button, visible in darkness
with RGB LED brightness
adjustment - 2 modules.
Depth: 21,5 mm



01485.AX


6-button, visible in darkness
with RGB LED brightness
adjustment - 3 modules.
Depth: 21,5 mm

Well-contact Plus - Devices



01580.AX

4-button, KNX standard, visible in
darkness with RGB LED brightness
adjustment - 2 modules.
Depth: 21,5 mm



01585.AX

6-button, KNX standard, visible in
darkness with RGB LED brightness
adjustment - 3 modules.
Depth: 21,5 mm

Interchangeable half buttons Eikon Exé Flat devices - 1-module



22751.01

Without
symbol,
white



22751.03

Without
symbol,
grey



22751.11

Without
symbol,
nickel



22751.12

Without
symbol,
bronze



22751.82

Without
symbol,
gold



22751.001

Without symbol,
customizable¹,
white



22751.003

Without symbol,
customizable¹,
grey



22751.011

Without symbol,
customizable¹,
nickel



22751.012

Without symbol,
customizable¹,
bronze



22751.082

Without symbol,
customizable¹,
gold



22751.1.01

ON/OFF
symbols,
white



22751.1.03

ON/OFF
symbols,
grey



22751.1.11

ON/OFF
symbols,
nickel



22751.1.12

ON/OFF
symbols,
bronze



22751.1.82

ON/OFF
symbols,
gold



22751.2.01

Arrows
symbols,
white



22751.2.03

Arrows
symbols,
grey



22751.2.11

Arrows
symbols,
nickel



22751.2.12

Arrows
symbols,
bronze



22751.2.82

Arrows
symbols,
gold



22751.3.01

Regulation
symbols,
white



22751.3.03

Regulation
symbols,
grey



22751.3.11

Regulation
symbols,
nickel



22751.3.12

Regulation
symbols,
bronze



22751.3.82

Regulation
symbols,
gold

Devices

EIKON EXÉ FLAT

Frames and cover plates

Frames



Frames for British Standard



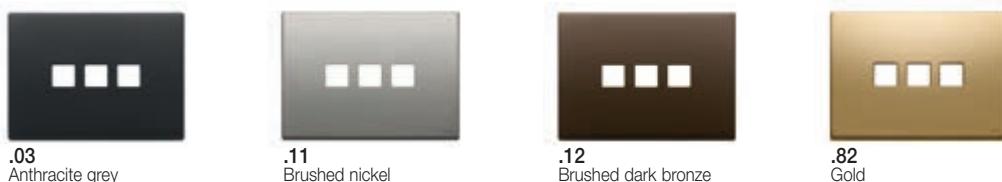
Cover plates modularity for conventional devices



Cover plates modularity for home automation devices



Cover plates finishes



Devices

EIKON EXÉ VINTAGE

Devices



22004.01
1P 10 AX 2-way switch,
white.
Depth: 32 mm



22004.03
As on the side,
grey.
Depth: 32 mm



22004.11
As on the side,
nickel.
Depth: 32 mm



22004.12
As on the side,
bronze.
Depth: 32 mm



22004.82
As on the side,
gold.
Depth: 32 mm



22008.01
1P NO 10 A push button,
white.
Depth: 32 mm



22008.03
As on the side,
grey.
Depth: 32 mm



22008.11
As on the side,
nickel.
Depth: 32 mm



22008.12
As on the side,
bronze.
Depth: 32 mm



22008.82
As on the side,
gold.
Depth: 32 mm



22061.01
2P 10 A 2-way push
button, central OFF,
white.
Depth: 40,5 mm



22061.03
As on the side,
grey.
Depth: 40,5 mm



22061.11
As on the side,
nickel.
Depth: 40,5 mm



22061.12
As on the side,
bronze.
Depth: 40,5 mm



22061.82
As on the side,
gold.
Depth: 40,5 mm

Frames and cover plates

Frames



21600.0
1-module,
without screws



21601.0
1-module,
with claws



21602
2-module,
with claws



21603
2-module,
without screws



21613
3-module, with screws



20606.0
1-module,
British Standard



20607
2-module,
British Standard

Cover plates modularity



22672.1.01
1-gang, 2 modules,
matt white



22672.2.01
2-gang, 2 modules,
matt white



22673.1.01
1-gang, 3 modules,
matt white



22673.2.01
2-gang, 3 modules,
matt white



22673.3.01
3-gang, 3 modules,
matt white

Cover plate finishes



.03
Anthracite grey



.11
Brushed nickel



.12
Brushed dark bronze



.82
Gold

* Not to be used in European Countries

▲ New article

Δ Available until stocks last

Devices

Grey	White	Next						
Blank modules and cable outlets								
 20041 Blank module. Depth: 11 mm	 20044 Cable outlet. Depth: 16,6 mm	 20041.B Blank module. Depth: 11 mm	 20044.B Cable outlet. Depth: 16,6 mm	 20041.N Blank module. Depth: 11 mm	 20044.N Cable outlet. Depth: 16,6 mm			
 20042 Blank module - 2 modules. Depth: 11 mm	 20042.B Blank module - 2 modules. Depth: 11 mm	 20042.N Blank module - 2 modules. Depth: 11 mm						
 20046² Cable outlet + terminalbar 20 A. Depth: 22,1 mm	 20047² 45 A 1-gang cable outlet supplied with cover plate. Depth: 20 mm	 20046.B² Cable outlet + terminalbar 20 A. Depth: 22,1 mm	 20047.B² 45 A 1-gang cable outlet supplied with cover plate. Depth: 20 mm	 20046.N² Cable outlet + terminalbar 20 A. Depth: 22,1 mm	 20047.N² 45 A 1-gang cable outlet supplied with cover plate. Depth: 20 mm			
 20049.L³ 13 A, 1-gang, switched and fused connection unit. Depth: 20,4 mm	 20049.L.B³ 13 A, 1-gang, switched and fused connection unit. Depth: 20,4 mm	 20049.L.N³ 13 A, 1-gang, switched and fused connection unit. Depth: 20,4 mm						
1P 1-way switches 250 V~ (lightable[°])								
 20001 16 AX. Depth: 25 mm	 20001.2 16 AX - 2 modules. Depth: 25 mm	 20001.B 16 AX. Depth: 25 mm	 20001.2.B 16 AX - 2 modules. Depth: 25 mm	 20001.N 16 AX. Depth: 25 mm	 20001.2.N 16 AX - 2 modules. Depth: 25 mm			
 20002 20 AX. Depth: 25 mm	 20002.2 20 AX - 2 modules. Depth: 25 mm	 20003 20 AX, 3-gang - 2 modules. Depth: 25 mm	 20002.B 20 AX. Depth: 25 mm	 20002.2.B 20 AX - 2 modules. Depth: 25 mm	 20003.B 20 AX, 3-gang - 2 modules. Depth: 25 mm	 20002.N 20 AX. Depth: 25 mm	 20002.2.N 20 AX - 2 modules. Depth: 25 mm	 20003.N 20 AX, 3-gang - 2 modules. Depth: 25 mm

Devices

Grey	White	Next						
1P 1-way switches 250 V~, screwless terminals (lightable°)								
 ▲20000.FX 10 AX Depth: 26,7 mm	 ▲20000.FX.2 10 AX - 2 modules. Depth: 26,7 mm	 ▲20000.FX.B 10 AX. Depth: 26,7 mm	 ▲20000.FX.2.B 10 AX - 2 modules. Depth: 26,7 mm	 ▲20000.FX.N 10 AX. Depth: 26,7 mm	 ▲20000.FX.2.N 10 AX - 2 modules. Depth: 26,7 mm			
Axial 1P 1-way switches 250 V~ (lightable°)								
 20101 16 AX. Depth: 34,5 mm	 20101.2 16 AX - 2 modules. Depth: 34,5 mm	 20101.B 16 AX. Depth: 34,5 mm	 20101.2.B 16 AX - 2 modules. Depth: 34,5 mm	 20101.N 16 AX. Depth: 34,5 mm	 20101.2.N 16 AX - 2 modules. Depth: 34,5 mm			
2P 1-way switches 250 V~ (lightable°)								
 20015 16 AX. Depth: 25 mm	 20015.2 16 AX - 2 modules. Depth: 25 mm	 20015.B 16 AX. Depth: 25 mm	 20015.2.B 16 AX - 2 modules. Depth: 25 mm	 20015.N 16 AX. Depth: 25 mm	 20015.2.N 16 AX - 2 modules. Depth: 25 mm			
2P 1-way switches 250 V~, screwless terminals (lightable°)								
 △ 20015.FX 16 AX. Depth: 26,7 mm	 △ 20015.FX.2 16 AX - 2 modules. Depth: 26,7 mm	 △ 20015.FX.B 16 AX. Depth: 26,7 mm	 △ 20015.FX.2.B 16 AX - 2 modules. Depth: 26,7 mm	 △ 20015.FX.N 16 AX. Depth: 26,7 mm	 △ 20015.FX.2.N 16 AX - 2 modules. Depth: 26,7 mm			
2P 1-way switches 250 V~ (lightable°)								
 20016 20 AX. Depth: 26 mm	 20016.2 20 AX, ON/OFF - 2 modules. Depth: 26 mm	 20016.WH 20 AX, Water/Heater. Depth: 26 mm	 20016.B 20 AX. Depth: 26 mm	 20016.2.B 20 AX, ON/OFF - 2 modules. Depth: 26 mm	 20016.WH.B 20 AX, Water/Heater. Depth: 26 mm	 20016.N 20 AX. Depth: 26 mm	 20016.2.N 20 AX, ON/OFF - 2 modules. Depth: 26 mm	 20016.WH.N 20 AX, Water/Heater. Depth: 26 mm
 20016.2.WH 20 AX, Water/Heater - 2 modules. Depth: 26 mm			 20016.2.WH.B 20 AX, Water/Heater - 2 modules. Depth: 26 mm			 20016.2.WH.N 20 AX, Water/Heater - 2 modules. Depth: 26 mm		

* Not to be used in European Countries

▲ New article

Δ Available until stocks last

Devices

Grey

White

Next

2P 1-way switches 250 V~ (lightable[°])

20017
32 A, 1-gang, ON/OFF.
Depth: 22,5 mm



20017.WH
32 A, 1-gang, Water/Heater.
Depth: 22,5 mm



20017.B
32 A, 1-gang, ON/OFF.
Depth: 22,5 mm



20017.WH.B
32 A, 1-gang, Water/Heater.
Depth: 22,5 mm



20017.N
32 A, 1-gang, ON/OFF.
Depth: 22,5 mm



20017.WH.N
32 A, 1-gang, Water/Heater.
Depth: 22,5 mm



20018
45 A, 1-gang, ON/OFF.
Depth: 22,5 mm



20018.CK
45 A, 1-gang, cooker unit.
Depth: 22,5 mm



20018.B
45 A, 1-gang, ON/OFF.
Depth: 22,5 mm



20018.CK.B
45 A, 1-gang, cooker unit.
Depth: 22,5 mm



20018.N
45 A, 1-gang, ON/OFF.
Depth: 22,5 mm



20018.CK.N
45 A, 1-gang, cooker unit.
Depth: 22,5 mm



20019
45 A, 1-gang, ON/OFF
for 2-gang boxes.
Depth: 22,5 mm



20019.CK
45 A, 1-gang, cooker
unit for 2-gang boxes.
Depth: 22,5 mm



20019.B
45 A, 1-gang, ON/OFF
for 2-gang boxes.
Depth: 22,5 mm



20019.CK.B
45 A, 1-gang, cooker
unit for 2-gang boxes.
Depth: 22,5 mm



20019.N
45 A, 1-gang, ON/OFF
for 2-gang boxes.
Depth: 22,5 mm



20019.CK.N
45 A, 1-gang, cooker
unit for 2-gang boxes.
Depth: 22,5 mm

Badge switch (lightable[°])

20466
Badge switch.
Depth: 22,1 mm



20466.B
Badge switch.
Depth: 22,1 mm



20466.N
Badge switch.
Depth: 22,1 mm

Devices

Grey	White	Next			
1P 2-way switches 250 V~ (lightable°)					
20005 16 AX. Depth: 25 mm	20005.2 16 AX - 2 modules. Depth: 25 mm	20005.B 16 AX. Depth: 25 mm	20005.2.B 16 AX - 2 modules. Depth: 25 mm	20005.N 16 AX. Depth: 25 mm	20005.2.N 16 AX - 2 modules. Depth: 25 mm
1P 2-way switches 250 V~ (lightable°)					
20006 20 AX. Depth: 25 mm	20006.2 20 AX, - 2 modules. Depth: 25 mm	20006.B 20 AX. Depth: 25 mm	20006.2.B 20 AX, - 2 modules. Depth: 25 mm	20006.N 20 AX. Depth: 25 mm	20006.2.N 20 AX, - 2 modules. Depth: 25 mm
1P 2-way switches 250 V~, screwless terminals (lightable°)					
▲20004.FX 10 AX. Depth: 26,7 mm	▲20004.FX.2 10 AX - 2 modules. Depth: 26,7 mm	▲20004.FX.B 10 AX. Depth: 26,7 mm	▲20004.FX.2.B 10 AX - 2 modules. Depth: 26,7 mm	▲20004.FX.N 10 AX. Depth: 26,7 mm	▲20004.FX.2.N 10 AX - 2 modules. Depth: 26,7 mm
1P 2-way switches 250 V~					
20007 20 AX, 3-gang - 2 modules. Depth: 32,6 mm	20007.B 20 AX, 3-gang - 2 modules. Depth: 32,6 mm	20007.N 20 AX, 3-gang - 2 modules. Depth: 32,6 mm			
Axial 1P 2-way switches 250 V~ (lightable°)					
20105 16 AX. Depth: 34,5 mm	20105.2 16 AX - 2 modules. Depth: 34,5 mm	20105.B 16 AX. Depth: 34,5 mm	20105.2.B 16 AX - 2 modules. Depth: 34,5 mm	20105.N 16 AX. Depth: 34,5 mm	20105.2.N 16 AX - 2 modules. Depth: 34,5 mm

View Wireless connected 2-way switches**20592.0**


Mechanism, 100-240 V 50/60 Hz output relay for 500 W incandescent lamps, 100 W LED lamps, 250 VA electronic transformers, 60 W fluorescent lamps. Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, 1 input for actuator push button or recall a scenario. To complete with 1-, 2- or 3-module buttons. Depth: 37,5 mm

Bluetooth® **zigbee**
certified product

Devices

Grey	White	Next			
1P reversing switches 250 V~ (lightable°)					
 20013 16 AX. Depth: 25 mm	 20013.2 16 AX - 2 modules. Depth: 25 mm	 20013.B 16 AX. Depth: 25 mm	 20013.2.B 16 AX - 2 modules. Depth: 25 mm	 20013.N 16 AX. Depth: 25 mm	 20013.2.N 16 AX - 2 modules. Depth: 25 mm
1P reversing switches 250 V~, screwless terminals (lightable°)					
 ▲20009.FX 10 AX. Depth: 27,7 mm	 ▲20009.FX.2 10 AX - 2 modules. Depth: 26,7 mm	 ▲20009.FX.B 10 AX. Depth: 27,7 mm	 ▲20009.FX.2.B 10 AX - 2 modules. Depth: 26,7 mm	 ▲20009.FX.N 10 AX. Depth: 27,7 mm	 ▲20009.FX.2.N 10 AX - 2 modules. Depth: 26,7 mm
Axial 1P reversing switches 250 V~ (lightable°)					
 20113 16 AX. Depth: 34,5 mm	 20113.2 16 AX - 2 modules. Depth: 34,5 mm	 20113.B 16 AX. Depth: 34,5 mm	 20113.2.B 16 AX - 2 modules. Depth: 34,5 mm	 20113.N 16 AX. Depth: 34,5 mm	 20113.2.N 16 AX - 2 modules. Depth: 34,5 mm
1P NO 10 A push buttons 250 V~ (lightable°)					
 20008 10 A. Depth: 25 mm	 20008.2 10 A - 2 modules. Depth: 25 mm	 20008.B 10 A. Depth: 25 mm	 20008.2.B 10 A - 2 modules. Depth: 25 mm	 20008.N 10 A. Depth: 25 mm	 20008.2.N 10 A - 2 modules. Depth: 25 mm
 20008.2.C Bell symbol - 2 modules. Depth: 25 mm	 20008.2.L Light symbol - 2 modules. Depth: 25 mm	 20008.2.C.B Bell symbol - 2 modules. Depth: 25 mm	 20008.2.L.B Light symbol - 2 modules. Depth: 25 mm	 20008.2.C.N Bell symbol - 2 modules. Depth: 25 mm	 20008.2.L.N Light symbol - 2 modules. Depth: 25 mm

Devices

Grey	White	Next
1P NO 10 A push buttons 250 V~, screwless terminals (lightable°)		
 20008.FX 10 A. Depth: 26,7 mm	 20008.FX.B 10 A. Depth: 26,7 mm	 20008.FX.N 10 A. Depth: 26,7 mm
Axial 1P NO 10 A push buttons 250 V~ (lightable°)		
 20108 10 A. Depth: 34,5 mm	 20108.B 10 A. Depth: 34,5 mm	 20108.N 10 A. Depth: 34,5 mm
1P NC 10 A push button 250 V~ (lightable°)		
 20010 10 A. Depth: 25 mm	 20010.B 10 A. Depth: 25 mm	 20010.N 10 A. Depth: 25 mm
Quid - Magnetic relay module for lighting (backfit)		
 03991 ON/OFF sequence pulse relay module, 1 input for NO push button, 1 NO 10 A 220-240 V~ 50/60 Hz relay output, for backfit	 03992 ON/OFF sequence pulse relay module, 1 input for NO push button, 1 input for reset push button, 1 NO 10 A 220-240 V~ 50/60 Hz relay output, luminous signalling of load status, for backfit	 03993 ON/OFF sequence pulse relay module, 1 input for NO push button, 2 NO 10 A 220-240 V~ 50/60 Hz sequence relay outputs, for backfit
 00932 Pre-wired LED unit for signalling the load status, for 03992, supply voltage 220-240 V~ 50/60 Hz, 0,5 W, green		

Devices

Grey

White

Next

Lightable° mechanisms 250 V~ (common devices for the three versions)

								
20001.0 1P 16 AX 1-way switch. Depth: 25 mm	20015.0 2P 16 AX 1-way switch. Depth: 25 mm	20005.0 1P 16 AX 2-way switch. Depth: 25 mm	20013.0 1P 16 AX reversing switch. Depth: 25 mm	20008.0 1P NO 10 A push button. Depth: 25 mm	20010.0 1P NC 10 A push button. Depth: 25 mm	20002.0 1P 20 AX 1-way switch. Depth: 25 mm	20016.0 2P 20 AX 1-way switch. Depth: 25 mm	20006.0 1P 20 AX 2-way switch. Depth: 25 mm

Lightable° mechanisms 250 V~, screwless terminals (common devices for the three versions)

				
▲20000.FX.0 1P 10 AX 1-way switch. Depth: 26,7 mm	△20015.FX.0 2P 16 AX 1-way switch. Depth: 26,7 mm	▲20004.FX.0 1P 10 AX 2-way switch. Depth: 26,7 mm	▲20009.FX.0 1P 10 AX reversing switch. Depth: 26,7 mm	20008.FX.0 1P NO 10 A push button. Depth: 26,7 mm




1-module interchangeable buttons (lightable°)

									
20021 No symbol	20026 With diffuser	20026.DND Do Not Disturb with diffuser	20026.PLS Please Clean with diffuser	20021.B No symbol	20026.B With diffuser	20026.DND.B Do Not Disturb with diffuser	20026.PLS.B Please Clean with diffuser	20021.N No symbol	20026.N With diffuser
									
20031 Customizable	20021.C Bell symbol	20021.L Light symbol	20021.P Key symbol	20031.B Customizable	20021.C.B Bell symbol	20021.L.B Light symbol	20021.P.B Key symbol	20031.N Customizable	20021.C.N Bell symbol
									
20021.99 O I symbols for 2P switches	20031.PS 'Press' marked	20021.99.B O I symbols for 2P switches	20031.PS.B 'Press' marked	20021.99.N O I symbols for 2P switches	20031.PS.N 'Press' marked				

1-module interchangeable buttons for axial controls (lightable°)

						
20131 No symbol	20131.C Bell symbol	20131.L Light symbol	20131.B No symbol	20131.C.B Bell symbol	20131.L.B Light symbol	20131.N No symbol
						20131.C.N Bell symbol

Devices

Grey	White	Next
2-module interchangeable buttons (lightable°)		
 20022 No symbol	 20022.B No symbol	 20022.N No symbol
 20027 With diffuser	 20027.B With diffuser	 20027.N With diffuser
 20032 Customizable	 20032.B Customizable	 20032.N Customizable
 20022.C Bell symbol	 20022.C.B Bell symbol	 20022.C.N Bell symbol
 20022.L Light symbol	 20022.L.B Light symbol	 20022.L.N Light symbol
 20022.P Key symbol	 20022.P.B Key symbol	 20022.P.N Key symbol
 20022.99 O I symbols for 2P switches	 20022.99.B O I symbols for 2P switches	 20022.99.N O I symbols for 2P switches
 20032.PS 'Press' marked	 20032.PS.B 'Press' marked	 20032.PS.N 'Press' marked
2-module interchangeable buttons for axial controls (lightable°)		
 20132 No symbol	 20132.B No symbol	 20132.N No symbol
 20132.C Bell symbol	 20132.C.B Bell symbol	 20132.C.N Bell symbol
 20132.L Light symbol	 20132.L.B Light symbol	 20132.L.N Light symbol
 20132.P Key symbol	 20132.P.B Key symbol	 20132.P.N Key symbol
 20132.0 Customizable	 20132.0.B Customizable	 20132.0.N Customizable
3-module interchangeable buttons (lightable°)		
 20023 No symbol	 20023.B No symbol	 20023.N No symbol
 20028 With diffuser	 20028.B With diffuser	 20028.N With diffuser
 20033 Customizable	 20033.B Customizable	 20033.N Customizable
 20023.C Bell symbol	 20023.C.B Bell symbol	 20023.C.N Bell symbol

* Not to be used in European Countries

▲ New article

Δ Available until stocks last

Devices

Grey	White	Next
1P special switches 250 V~		
 20050 NO 10 A, with lightable nameplate - 2 modules. Depth: 26,5 mm	 20050.B NO 10 A, with lightable nameplate - 2 modules. Depth: 26,5 mm	 20050.N NO 10 A, with lightable nameplate - 2 modules. Depth: 26,5 mm
 20052 NO 10 A cord-operated. Depth: 25,5 mm	 20052.B NO 10 A cord-operated. Depth: 25,5 mm	 20052.N NO 10 A cord-operated. Depth: 25,5 mm
 20053 NC 10 A cord-operated. Depth: 25,5 mm	 20053.B NC 10 A cord-operated. Depth: 25,5 mm	 20053.N NC 10 A cord-operated. Depth: 25,5 mm
Additional 1P switches 250 V~		
 20056.33 10 A, NO + NC-contact, OFF symbol. Depth: 29,5 mm	 20056.34 10 A, NO + NC-contact, ON symbol. Depth: 29,5 mm	 20058 Two 10 A NO+NC independent contacts, OFF/ON symbols. Depth: 29,5 mm
 20056.33.B 10 A, NO + NC-contact, OFF symbol. Depth: 29,5 mm	 20056.34.B 10 A, NO + NC-contact, ON symbol. Depth: 29,5 mm	 20058.B Two 10 A NO+NC independent contacts, OFF/ON symbols. Depth: 29,5 mm
 20056.33.N 10 A, NO + NC-contact, OFF symbol. Depth: 29,5 mm	 20056.34.N 10 A, NO + NC-contact, ON symbol. Depth: 29,5 mm	 20058.N Two 10 A NO+NC independent contacts, OFF/ON symbols. Depth: 29,5 mm
1P NO 10 A push buttons 250 V~		
 20066 Two NO 10 A, independents. Depth: 29,5 mm	 20068.B With white diffuser (for signalling unit). Depth: 29 mm	 20066.B Two NO 10 A, independents. Depth: 29,5 mm
 20068.B.B With white diffuser (for signalling unit). Depth: 29 mm		 20066.N Two NO 10 A, independents. Depth: 29,5 mm
 20068.B.N With white diffuser (for signalling unit). Depth: 29 mm		
Switches 250 V~		
 20060 2P 10 AX 2-way switch, OFF-central. Depth: 34 mm	 20061 2P 10 A 2-way push button, OFF-central. Depth: 35 mm	 20062 2 1P NO 10 A push buttons, interlocked. Depth: 29,5 mm
 20060.B 2P 10 AX 2-way switch, OFF-central. Depth: 34 mm	 20061.B 2P 10 A 2-way push button, OFF-central. Depth: 35 mm	 20062.B 2 1P NO 10 A push buttons, interlocked. Depth: 29,5 mm
 20060.N 2P 10 AX 2-way switch, OFF-central. Depth: 34 mm	 20061.N 2P 10 A 2-way push button, OFF-central. Depth: 35 mm	 20062.N 2 1P NO 10 A push buttons, interlocked. Depth: 29,5 mm
Quid - Electronic 2-way switch for roller shutter		
 20196 Slat orientation, with relay outputs for cosφ 0,6 motor 2 A 220-240 V~ 50/60 Hz, position saving. Depth: 41,5 mm	 20196.B Slat orientation, with relay outputs for cosφ 0,6 motor 2 A 220-240 V~ 50/60 Hz, position saving. Depth: 41,5 mm	 20196.N Slat orientation, with relay outputs for cosφ 0,6 motor 2 A 220-240 V~ 50/60 Hz, position saving. Depth: 41,5 mm

Devices

Grey

White

Next

Quid - Electronic relay module and control unit module for roller shutters (backfit)

**03996**

Centralizable relay module, slat orientation, with relay outputs for cosφ 0,6 motor 2 A 220-240 V~ 50/60 Hz, position saving, for backfit or junction boxes installation

**03997**

Control unit module, 2 inputs for NO push button, 6 outputs for Quid roller shutter relay module (03996), 220-240 V~ 50/60 Hz power supply, for backfit or junction boxes installation

View Wireless connected control device for roller shutter

**20594.0**

Control device for 1 roller shutter with slat orientation and change-over relay output for cosφ 0,6 motor 2 A 100-240 V~ 50/60 Hz, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, 1 input for external push button to recall a scenario, favourite position recall function. To complete with 2 1-module half-button. Depth: 37,5 mm

Bluetooth®
zigbee
certified product
**20755.2**

2 1-module interchangeable half-button, arrows symbol

**20755.2.B**

2 1-module interchangeable half-button, arrows symbol

**20755.2.N**

2 1-module interchangeable half-button, arrows symbol

2P key-operated switches 250 V~ (add .CU to the basic code for switches with 000 unified key)

**20082**

16 AX 1-way switch, key removable in "O" (OFF) position. Depth: 33,5 mm

**20083**

16 AX 1-way switch, key removable in both positions. Depth: 33,5 mm

**20086**

NO 16 A push button, key removable in "O" position. Depth: 33,5 mm

**20082.B**

16 AX 1-way switch, key removable in "O" (OFF) position. Depth: 33,5 mm

**20083.B**

16 AX 1-way switch, key removable in both positions. Depth: 33,5 mm

**20086.B**

NO 16 A push button, key removable in "O" position. Depth: 33,5 mm

**20082.N**

16 AX 1-way switch, key removable in "O" (OFF) position. Depth: 33,5 mm

**20083.N**

16 AX 1-way switch, key removable in both positions. Depth: 33,5 mm

**20086.N**

NO 16 A push button, key removable in "O" position. Depth: 33,5 mm

Dimmers**

**20135.1**

MASTER, universal. Depth: 41,5 mm

20135.1.120
As above,
120 V~.
Depth: 40,5 mm

**20136.1**

MASTER, universal, with potentiometer. Depth: 41,5 mm

**20138**
RGB, with potentiometer. Depth: 41,5 mm**20135.1.B**
MASTER, universal. Depth: 41,5 mm

20135.1.120.B
As above,
120 V~.
Depth: 40,5 mm

**20136.1.B**
MASTER, universal, with potentiometer. Depth: 41,5 mm**20138.B**
RGB, with potentiometer. Depth: 41,5 mm**20135.1.N**
MASTER, universal. Depth: 41,5 mm

20135.1.120.N
As above,
120 V~.
Depth: 40,5 mm

**20136.1.N**
MASTER, universal, with potentiometer. Depth: 41,5 mm**20138.N**
RGB, with potentiometer. Depth: 41,5 mm**20139**
FADING-SHOW, with potentiometer. Depth: 41,5 mm***20148**
MASTER, 800 W/500 VA
120-230 V~.
Depth: 41,5 mm**20139.B**
FADING-SHOW, with potentiometer. Depth: 41,5 mm***20148.B**
MASTER, 800 W/500 VA
120-230 V~.
Depth: 41,5 mm**20139.N**
FADING-SHOW, with potentiometer. Depth: 41,5 mm***20148.N**
MASTER, 800 W/500 VA
120-230 V~.
Depth: 41,5 mm

Devices

Grey	White	Next																																																																																										
Dimmers**																																																																																												
 Δ 20165 MASTER, 500 W 230 V~ - 2 modules. For incandescent lamps and ferromagnetic transformers  Depth: 32,5 mm	 Δ 20165.B MASTER, 500 W 230 V~ - 2 modules. For incandescent lamps and ferromagnetic transformers  Depth: 32,5 mm	 Δ 20165.N MASTER, 500 W 230 V~ - 2 modules. For incandescent lamps and ferromagnetic transformers  Depth: 32,5 mm																																																																																										
Dimmer - controllable loads																																																																																												
<table border="1"> <thead> <tr> <th>Type</th> <th colspan="8">UNIVERSAL</th> </tr> <tr> <th>DIMMER \ LOADS</th> <th colspan="4">20135.1</th> <th colspan="4">20136.1</th> </tr> <tr> <th></th> <th colspan="2">2-wire connection</th> <th colspan="2">3-wire connection</th> <th colspan="2">2-wire connection</th> <th colspan="2">3-wire connection</th> </tr> <tr> <th></th> <th>LE</th> <th>TE</th> <th>LE</th> <th>TE</th> <th>LE</th> <th>TE</th> <th>LE</th> <th>TE</th> </tr> </thead> <tbody> <tr> <td>Incandescence</td> <td>40 ÷ 400 W</td> <td>40 ÷ 300 W</td> </tr> <tr> <td>Compact fluorescent lamps (CFL)</td> <td>10 ÷ 100 W max 5 lamps</td> <td>10 ÷ 200 W max 10 lamps</td> <td>10 ÷ 100 W max 5 lamps</td> <td>10 ÷ 200 W max 10 lamps</td> <td>10 ÷ 100 W max 5 lamps</td> <td>10 ÷ 200 W max 10 lamps</td> <td>10 ÷ 100 W max 5 lamps</td> <td>10 ÷ 200 W max 10 lamps</td> </tr> <tr> <td>LED</td> <td>5 ÷ 100 W max 10 lamps</td> <td>5 ÷ 200 W max 20 lamps</td> <td>3 ÷ 100 W max 10 lamps</td> <td>3 ÷ 200 W max 20 lamps</td> <td>5 ÷ 100 W max 10 lamps</td> <td>5 ÷ 200 W max 20 lamps</td> <td>3 ÷ 100 W max 10 lamps</td> <td>3 ÷ 200 W max 20 lamps</td> </tr> <tr> <td>Electronic transformers for halogen</td> <td>40 ÷ 300 VA max 3 transformers type </td> <td>40 ÷ 300 VA max 5 transformers type </td> <td>40 ÷ 300 VA max 3 transformers type </td> <td>40 ÷ 300 VA max 5 transformers type </td> <td>40 ÷ 300 VA max 3 transformers type </td> <td>40 ÷ 300 VA max 5 transformers type </td> <td>40 ÷ 300 VA max 3 transformers type </td> <td>40 ÷ 300 VA max 5 transformers type </td> </tr> <tr> <td>Supply units for LED (arts. 01874, 01875)</td> <td></td> <td></td> <td>max 10 units</td> <td>NOT useful</td> <td></td> <td></td> <td>max 10 units</td> <td>NOT useful</td> </tr> <tr> <td>Step marker lamps (art. 02662)</td> <td></td> <td></td> <td>max 10 lamps</td> <td>NOT useful</td> <td></td> <td></td> <td>max 10 lamps</td> <td>NOT useful</td> </tr> </tbody> </table>	Type	UNIVERSAL								DIMMER \ LOADS	20135.1				20136.1					2-wire connection		3-wire connection		2-wire connection		3-wire connection			LE	TE	LE	TE	LE	TE	LE	TE	Incandescence	40 ÷ 400 W	40 ÷ 300 W	40 ÷ 400 W	40 ÷ 300 W	40 ÷ 400 W	40 ÷ 300 W	40 ÷ 400 W	40 ÷ 300 W	Compact fluorescent lamps (CFL)	10 ÷ 100 W max 5 lamps	10 ÷ 200 W max 10 lamps	10 ÷ 100 W max 5 lamps	10 ÷ 200 W max 10 lamps	10 ÷ 100 W max 5 lamps	10 ÷ 200 W max 10 lamps	10 ÷ 100 W max 5 lamps	10 ÷ 200 W max 10 lamps	LED	5 ÷ 100 W max 10 lamps	5 ÷ 200 W max 20 lamps	3 ÷ 100 W max 10 lamps	3 ÷ 200 W max 20 lamps	5 ÷ 100 W max 10 lamps	5 ÷ 200 W max 20 lamps	3 ÷ 100 W max 10 lamps	3 ÷ 200 W max 20 lamps	Electronic transformers for halogen	40 ÷ 300 VA max 3 transformers type 	40 ÷ 300 VA max 5 transformers type 	40 ÷ 300 VA max 3 transformers type 	40 ÷ 300 VA max 5 transformers type 	40 ÷ 300 VA max 3 transformers type 	40 ÷ 300 VA max 5 transformers type 	40 ÷ 300 VA max 3 transformers type 	40 ÷ 300 VA max 5 transformers type 	Supply units for LED (arts. 01874, 01875)			max 10 units	NOT useful			max 10 units	NOT useful	Step marker lamps (art. 02662)			max 10 lamps	NOT useful			max 10 lamps	NOT useful		
Type	UNIVERSAL																																																																																											
DIMMER \ LOADS	20135.1				20136.1																																																																																							
	2-wire connection		3-wire connection		2-wire connection		3-wire connection																																																																																					
	LE	TE	LE	TE	LE	TE	LE	TE																																																																																				
Incandescence	40 ÷ 400 W	40 ÷ 300 W	40 ÷ 400 W	40 ÷ 300 W	40 ÷ 400 W	40 ÷ 300 W	40 ÷ 400 W	40 ÷ 300 W																																																																																				
Compact fluorescent lamps (CFL)	10 ÷ 100 W max 5 lamps	10 ÷ 200 W max 10 lamps	10 ÷ 100 W max 5 lamps	10 ÷ 200 W max 10 lamps	10 ÷ 100 W max 5 lamps	10 ÷ 200 W max 10 lamps	10 ÷ 100 W max 5 lamps	10 ÷ 200 W max 10 lamps																																																																																				
LED	5 ÷ 100 W max 10 lamps	5 ÷ 200 W max 20 lamps	3 ÷ 100 W max 10 lamps	3 ÷ 200 W max 20 lamps	5 ÷ 100 W max 10 lamps	5 ÷ 200 W max 20 lamps	3 ÷ 100 W max 10 lamps	3 ÷ 200 W max 20 lamps																																																																																				
Electronic transformers for halogen	40 ÷ 300 VA max 3 transformers type 	40 ÷ 300 VA max 5 transformers type 	40 ÷ 300 VA max 3 transformers type 	40 ÷ 300 VA max 5 transformers type 	40 ÷ 300 VA max 3 transformers type 	40 ÷ 300 VA max 5 transformers type 	40 ÷ 300 VA max 3 transformers type 	40 ÷ 300 VA max 5 transformers type 																																																																																				
Supply units for LED (arts. 01874, 01875)			max 10 units	NOT useful			max 10 units	NOT useful																																																																																				
Step marker lamps (art. 02662)			max 10 lamps	NOT useful			max 10 lamps	NOT useful																																																																																				
<table border="1"> <thead> <tr> <th>Type</th> <th colspan="2">RGB</th> <th colspan="2">FADING-SHOW</th> </tr> <tr> <th>DIMMER \ LOADS</th> <th colspan="2">20138</th> <th colspan="2">20139</th> </tr> </thead> <tbody> <tr> <td>RGB supply units (art. 01876)</td> <td colspan="2">max 10 units</td> <td colspan="2">max 10 units</td> </tr> <tr> <td>RGB lamps (art. 02663)</td> <td colspan="2">max 10 lamps</td> <td colspan="2">max 10 lamps</td> </tr> </tbody> </table>	Type	RGB		FADING-SHOW		DIMMER \ LOADS	20138		20139		RGB supply units (art. 01876)	max 10 units		max 10 units		RGB lamps (art. 02663)	max 10 lamps		max 10 lamps																																																																									
Type	RGB		FADING-SHOW																																																																																									
DIMMER \ LOADS	20138		20139																																																																																									
RGB supply units (art. 01876)	max 10 units		max 10 units																																																																																									
RGB lamps (art. 02663)	max 10 lamps		max 10 lamps																																																																																									
<table border="1"> <thead> <tr> <th>Type</th> <th colspan="3">STANDARD</th> </tr> <tr> <th>DIMMER \ LOADS</th> <th colspan="3">20148 MASTER</th> </tr> </thead> <tbody> <tr> <td>Incandescence</td> <td>40 - 500 W 120 V~ 50/60 Hz 40 - 800 W 230 V~ 50/60 Hz</td> <td></td> <td>40 - 500 W at 50 Hz 40 - 400 W at 60 Hz</td> </tr> <tr> <td>Ferromagnetic Transformers</td> <td>40 - 300 VA 120 V~ 50/60 Hz 40 - 500 VA 230 V~ 50/60 Hz</td> <td></td> <td>40 - 500 VA at 50 Hz 40 - 400 VA at 60 Hz</td> </tr> </tbody> </table>	Type	STANDARD			DIMMER \ LOADS	20148 MASTER			Incandescence	40 - 500 W 120 V~ 50/60 Hz 40 - 800 W 230 V~ 50/60 Hz		40 - 500 W at 50 Hz 40 - 400 W at 60 Hz	Ferromagnetic Transformers	40 - 300 VA 120 V~ 50/60 Hz 40 - 500 VA 230 V~ 50/60 Hz		40 - 500 VA at 50 Hz 40 - 400 VA at 60 Hz																																																																												
Type	STANDARD																																																																																											
DIMMER \ LOADS	20148 MASTER																																																																																											
Incandescence	40 - 500 W 120 V~ 50/60 Hz 40 - 800 W 230 V~ 50/60 Hz		40 - 500 W at 50 Hz 40 - 400 W at 60 Hz																																																																																									
Ferromagnetic Transformers	40 - 300 VA 120 V~ 50/60 Hz 40 - 500 VA 230 V~ 50/60 Hz		40 - 500 VA at 50 Hz 40 - 400 VA at 60 Hz																																																																																									
Electronic supply unit																																																																																												
 01874 230 V~ 50 Hz, for controllable LED lamps, 12-24 Vdc Δ 01874.120 As above, 120 V~	 01875 230 V~ 50 Hz, for controllable LED lamps, 350/500/700 mA Δ 01875.120 As above, 120 V~	 01876 230 V~ 50 Hz, for controllable LED RGB lamps, 12-24 Vdc Δ 01876.120 As above, 120 V~																																																																																										
Touch switches (230 V~ with built-in touch sensor)																																																																																												
 20120 Electronic switch, NO 6 A relay. Depth: 37 mm	 20125 Dimmer, 40-500 W/V/A, MASTER. Depth: 41,5 mm	 20123 Push button for remote control, 50/60 Hz. Depth: 37 mm	 20120.B Electronic switch, NO 6 A relay. Depth: 37 mm	 20125.B Dimmer, 40-500 W/V/A, MASTER. Depth: 41,5 mm	 20123.B Push button for remote control, 50/60 Hz. Depth: 37 mm	 20120.N Electronic switch, NO 6 A relay. Depth: 37 mm	 20125.N Dimmer, 40-500 W/V/A, MASTER. Depth: 41,5 mm	 20123.N Push button for remote control, 50/60 Hz. Depth: 37 mm																																																																																				

Devices

Grey	White	Next
Infrared switches		
 Δ 20172 Receiver, NO 6 A 230 V~ relay output, 50/60 Hz Δ 20172.120 As above, 120 V~. Depth: 37 mm	 Δ 20173 Receiver, 4 A 230 V~ relay outputs, for rolling shutters - 2 modules. Depth: 37 mm	 Δ 20175 Receiver, 40-450 W/VA dimmer, 230 V~. Depth: 41,5 mm
 Δ 20172.B Receiver, NO 6 A 230 V~ relay output, 50/60 Hz Δ 20172.120.B As above, 120 V~. Depth: 37 mm	 Δ 20173.B Receiver, 4 A 230 V~ relay outputs, for rolling shutters - 2 modules. Depth: 37 mm	 Δ 20175.B Receiver, 40-450 W/VA dimmer, 230 V~. Depth: 41,5 mm
 Δ 20172.N Receiver, NO 6 A 230 V~ relay output, 50/60 Hz Δ 20172.120.N As above, 120 V~. Depth: 37 mm	 Δ 20173.N Receiver, 4 A 230 V~ relay outputs, for rolling shutters - 2 modules. Depth: 37 mm	 Δ 20175.N Receiver, 40-450 W/VA dimmer, 230 V~. Depth: 41,5 mm
 Δ 01849 IR remote control, 14-channel		
 20181 Lighting switch, NO 6 A 230 V~ relay output, 50/60 Hz 20181.120 As above, 120 V~. Depth: 37 mm	 20181.B Lighting switch, NO 6 A 230 V~ relay output, 50/60 Hz 20181.120.B As above, 120 V~. Depth: 37 mm	 20181.N Lighting switch, NO 6 A 230 V~ relay output, 50/60 Hz 20181.120.N As above, 120 V~. Depth: 37 mm
 00800.14 Frame for orien- table support surface mounting	 00805.14 Adaptor for orientable support flush mounting - 2 modules. Depth: 36,5 mm	 00801.14 Orientable support - 1 module
 00800 Frame for orien- table support surface mounting	 00805 Adaptor for orientable support flush mounting - 2 modules. Depth: 36,5 mm	 00801 Orientable support - 1 module
 00800.20 Frame for orien- table support surface mounting	 00805.20 Adaptor for orientable support flush mounting - 2 modules. Depth: 36,5 mm	 00801.20 Orientable support - 1 module
 02690 Lighting switch, 2000 W incandescent lamps, CFL 10-1000 W, LED 100 W, 220-240 V~ 50/60 Hz, ceiling mounting		
Set/Reset push buttons		
 20183 For emergency call, 2 NO 5 A 250 V~, 12 V~/12-24 Vdc (SELV) - 2 modules. Depth: 38,5 mm	 20183.B For emergency call, 2 NO 5 A 250 V~, 12 V~/12-24 Vdc (SELV) - 2 modules. Depth: 38,5 mm	 20183.N For emergency call, 2 NO 5 A 250 V~, 12 V~/12-24 Vdc (SELV) - 2 modules. Depth: 38,5 mm

* Not to be used in European Countries

▲ New article

Δ Available until stocks last

Devices

Grey

White

Next

Radiofrequency kits

**OK03906.03**

Kit Friends of Hue Eikon Evo. Contains:

- 1 4-button RF device 03906
- 1 mounting frame 21507.B, white
- 2 buttons 20506.B, white
- 2-module cover plate 21642.17, total white

Radiofrequency smart devices

**VIEW**
IoT smart life**03955**

4-button flat device with RF transmission, 868 MHz, **EnOcean®** standard, to be completed with buttons 20506+20506.2 - 2 modules

**01796.2**

Multi-function actuator with relay output NO 10 A 230 V~ programmable with switch function for local control, transferable local input as ON/OFF control for other **EnOcean®** actuators, 230 V~ 50/60 Hz power supply

**VIEW**
IoT smart life**03925**

4-button flat device with RF transmission, 2.4 GHz, **Bluetooth® Low Energy** wireless technology, to be completed with buttons 20506+20506.2 - 2 modules

**VIEW**
IoT smart life**03905**

4-button flat device with RF transmission, 2.4 GHz, **ZigBee Green Power** standard, to be completed with buttons 20506+20506.2 - 2 modules

**VIEW**
IoT smart life**03906**

4-button flat device with RF transmission, 2.4 GHz, **ZigBee Green Power** and **Friends of Hue** standard, to be completed with buttons 20506 - 2 modules

**20507**

Frame for RF devices surface mounting, only for Eikon Chrome cover plate, grey

**20507.B**


Frame for RF devices surface mounting, only for Eikon Chrome cover plate, white

**▲21507.1**


Frame for RF devices surface mounting, only for Eikon Evo cover plate, grey

**▲21507.1.B**

Frame for RF devices surface mounting, only for Eikon Evo cover plate, white

**22507**

Frame for RF devices surface mounting, only for Eikon Exé cover plate, grey

**22507.B**

Frame for RF devices surface mounting, only for Eikon Exé cover plate, white

**20506**

Pair of 1-module buttons for RF devices, customizable

**20506.2**

2-module button for RF devices, customizable

**20506.B**

Pair of 1-module buttons for RF devices, customizable

**20506.2.B**

2-module button for RF devices, customizable




**20506.N**

Pair of 1-module buttons for RF devices, customizable

**20506.2.N**

2-module button for RF devices, customizable



Socket outlets

Grey	White	Next
SICURY 2P+E Italian standard socket outlets 250 V~		
 20201 10 A, P11. Depth: 25 mm	 20201.B 10 A, P11. Depth: 25 mm	 20201.N 10 A, P11. Depth: 25 mm
 20209 16 A, P30 - 2 modules. Depth: 29,4 mm	 20209.B 16 A, P30 - 2 modules. Depth: 29,4 mm	 20209.N 16 A, P30 - 2 modules. Depth: 29,4 mm
 20203 Bpresa 16 A, P17/11. Depth: 25 mm	 20203.B Bpresa 16 A, P17/11. Depth: 25 mm	 20203.N Bpresa 16 A, P17/11. Depth: 25 mm
 20210 16 A, universal - 2 modules. Depth: 26 mm	 20210.B 16 A, universal - 2 modules. Depth: 26 mm	 20210.N 16 A, universal - 2 modules. Depth: 26 mm
View Wireless connected control device for socket outlet		
 20593 VIEW IoT smart life Bluetooth® zigbee certified product	 20593.B Control device with NO 16 A 100-240 V~ 50/60 Hz relay output, local control with push button or remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, function for measuring the instant power and load cut-off threshold. Depth: 39,5 mm	 20593.N Control device with NO 16 A 100-240 V~ 50/60 Hz relay output, local control with push button or remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, function for measuring the instant power and load cut-off threshold. Depth: 39,5 mm
SICURY 2P+E socket outlets 250 V~ (for dedicated supply lines)		
 20203.R Bpresa 16 A, P17/11, red. Depth: 25 mm	 20209.A 16 A, P30, orange - 2 modules. Depth: 29,4 mm	 20209.R 16 A, P30, red - 2 modules. Depth: 29,4 mm
 20209.V 16 A, P30, green - 2 modules. Depth: 29,4 mm	 20210.R 16 A, universal, red - 2 modules. Depth: 29,4 mm	
Socket outlets 250 V~ - German standard		
 20208 SICURY 2P+E 16 A, German - 2 modules. Depth: 29,4 mm	 20208.C SICURY 2P+E 16 A, German, with cover - 2 modules. Depth: 31,2 mm	 20208.B SICURY 2P+E 16 A, German - 2 modules. Depth: 29,4 mm
 20208.C.B SICURY 2P+E 16 A, German, with cover - 2 modules. Depth: 31,2 mm	 20208.N SICURY 2P+E 16 A, German - 2 modules. Depth: 29,4 mm	 20208.C.N SICURY 2P+E 16 A, German, with cover - 2 modules. Depth: 31,2 mm

Socket outlets

Grey	White	Next						
Socket outlets 250 V~, screwless terminals - German standard								
 20208.FX SICURY 2P+E 16 A, German - 2 modules. Depth: 33,5 mm	 20208.FX.C SICURY 2P+E 16 A, German, with cover - 2 modules. Depth: 34,4 mm	 20208.FX.B SICURY 2P+E 16 A, German - 2 modules. Depth: 33,5 mm	 20208.FX.C.B SICURY 2P+E 16 A, German, with cover - 2 modules. Depth: 34,4 mm	 20208.FX.N SICURY 2P+E 16 A, German - 2 modules. Depth: 33,5 mm	 20208.FX.C.N SICURY 2P+E 16 A, German, with cover - 2 modules. Depth: 34,4 mm			
Socket outlets 250 V~ - French standard								
 20212 SICURY 2P+E 16 A, French - 2 modules. Depth: 26,4 mm	 20212.C SICURY 2P+E 16 A, French, with cover - 2 modules. Depth: 28,3 mm	 20212.B SICURY 2P+E 16 A, French - 2 modules. Depth: 26,4 mm	 20212.C.B SICURY 2P+E 16 A, French, with cover - 2 modules. Depth: 28,3 mm	 20212.N SICURY 2P+E 16 A, French - 2 modules. Depth: 26,4 mm	 20212.C.N SICURY 2P+E 16 A, French, with cover - 2 modules. Depth: 28,3 mm			
Socket outlets 250 V~, screwless terminals - French standard								
 20212.FX SICURY 2P+E 16 A, French - 2 modules. Depth: 30,5 mm	 20212.FX.C SICURY 2P+E 16 A, French, with cover - 2 modules. Depth: 31,5 mm	 20212.FX.B SICURY 2P+E 16 A, French - 2 modules. Depth: 30,5 mm	 20212.FX.C.B SICURY 2P+E 16 A, French, with cover - 2 modules. Depth: 31,5 mm	 20212.FX.N SICURY 2P+E 16 A, French - 2 modules. Depth: 30,5 mm	 20212.FX.C.N SICURY 2P+E 16 A, French, with cover - 2 modules. Depth: 31,5 mm			
Socket outlets 250 V~ - English standard								
 20214 SICURY 2P+E 5 A, English - 2 modules. Depth: 17,8 mm	 20219⁴ 2P+E 13 A, English - 2 modules. Depth: 17 mm	 20220 SICURY 2P+E 13 A, English - 2 modules. Depth: 24,4 mm	 20214.B SICURY 2P+E 5 A, English - 2 modules. Depth: 17,8 mm	 20219.B⁴ 2P+E 13 A, English - 2 modules. Depth: 17 mm	 20220.B SICURY 2P+E 13 A, English - 2 modules. Depth: 24,4 mm	 20214.N SICURY 2P+E 5 A, English - 2 modules. Depth: 17,8 mm	 20219.N⁴ 2P+E 13 A, English - 2 modules. Depth: 17 mm	 20220.N SICURY 2P+E 13 A, English - 2 modules. Depth: 24,4 mm
Socket outlets 250 V~ - Swiss standard								
 20226 2P+E 10 A, Swiss, 13-type - 2 modules. Depth: 36,75 mm	 20226.B 2P+E 10 A, Swiss, 13-type - 2 modules. Depth: 36,75 mm	 20226.N 2P+E 10 A, Swiss, 13-type - 2 modules. Depth: 36,75 mm						

Socket outlets

Grey	White	Next
SICURY socket outlets 250 V~ - Euro-American standard		
 20234 2P 16 A, Euro-American (ø 4,8 mm). Depth: 28,5 mm	 20248 2P+E 16 A, Euro-American - 2 modules. Depth: 26,5 mm	 20249 Two 2P+E 16 A, Euro-American - 3 modules. Depth: 24,5 mm
 20234.B 2P 16 A, Euro-American (ø 4,8 mm). Depth: 28,5 mm	 20248.B 2P+E 16 A, Euro-American - 2 modules. Depth: 26,5 mm	 20249.B Two 2P+E 16 A, Euro-American - 3 modules. Depth: 24,5 mm
 20234.N 2P 16 A, Euro-American (ø 4,8 mm). Depth: 28,5 mm	 20248.N 2P+E 16 A, Euro-American - 2 modules. Depth: 26,5 mm	 20249.N Two 2P+E 16 A, Euro-American - 3 modules. Depth: 24,5 mm
Socket outlets 127 V~ - USA and Saudi Arabian standards		
 20242 SICURY 2P+E 15 A, USA and Arabian. Depth: 27,4 mm	 20243 Two SICURY 2P+E 15 A, USA and Arabian - 3 modules. Depth: 26 mm	 20242.B SICURY 2P+E 15 A, USA and Arabian. Depth: 27,4 mm
 20243.B Two SICURY 2P+E 15 A, USA and Arabian - 3 modules. Depth: 26 mm	 20242.N SICURY 2P+E 15 A, USA and Arabian. Depth: 27,4 mm	 20243.N Two SICURY 2P+E 15 A, USA and Arabian - 3 modules. Depth: 26 mm
Socket outlets 250 V~ - Israeli standard		
 20240 SICURY 2P+E 16 A, Israeli - 2 modules. Depth: 28,7 mm	 20240.B SICURY 2P+E 16 A, Israeli - 2 modules. Depth: 28,7 mm	 20240.N SICURY 2P+E 16 A, Israeli - 2 modules. Depth: 28,7 mm
Socket outlets 250 V~ - Argentinian standard		
 20250 SICURY 2P+E 10 A, Argentinian. Depth: 27,5 mm	 20250.B SICURY 2P+E 10 A, Argentinian. Depth: 27,5 mm	 20250.N SICURY 2P+E 10 A, Argentinian. Depth: 27,5 mm
Socket outlets 250 V~ - Chinese standard		
 20251 SICURY 2P+E 10 A, Chinese. Depth: 27,5 mm	 20252 SICURY 2P+E 10 A, Chinese - 2 modules. Depth: 27,5 mm	 20254 SICURY 2P+E 16 A, Chinese - 2 modules. Depth: 30 mm
 20251.B SICURY 2P+E 10 A, Chinese. Depth: 27,5 mm	 20252.B SICURY 2P+E 10 A, Chinese - 2 modules. Depth: 27,5 mm	 20254.B SICURY 2P+E 16 A, Chinese. - 2 modules. Depth: 30 mm
 20251.N SICURY 2P+E 10 A, Chinese. Depth: 27,5 mm	 20252.N SICURY 2P+E 10 A, Chinese - 2 modules. Depth: 27,5 mm	 20254.N SICURY 2P+E 16 A, Chinese - 2 modules. Depth: 30 mm
Socket outlets 250 V~ - Australian standard		
 20262 SICURY 2P+E 15 A, Australian - 2 modules. Depth: 30,4 mm	 20262.B SICURY 2P+E 15 A, Australian - 2 modules. Depth: 30,4 mm	 20262.N SICURY 2P+E 15 A, Australian - 2 modules. Depth: 30,4 mm

* Not to be used in European Countries

▲ New article

Δ Available until stocks last

Socket outlets

Grey

White

Next


Socket outlets 250 V~ - Brazilian standard



20264
SICURY
2P+E 10 A,
Brazilian.
Depth:
31,5 mm



20264.B
SICURY
2P+E 10 A,
Brazilian.
Depth:
31,5 mm



20264.N
SICURY
2P+E 10 A,
Brazilian.
Depth:
31,5 mm

Socket outlets 250 V~ - Multistandard



20255
SICURY 2P+E 13 A,
with 1P 1-way switch,
lightable - 3 modules.
Depth: 19,5 mm



***20257**
SICURY 2P+E 13 A,
- 2 modules.
Depth: 18,7 mm



20255.B
SICURY 2P+E 13 A,
with 1P 1-way switch,
lightable - 3 modules.
Depth: 19,5 mm



20255.N
SICURY 2P+E 13 A,
with 1P 1-way switch,
lightable - 3 modules.
Depth: 19,5 mm



***20257.N**
SICURY 2P+E 13 A,
- 2 modules.
Depth: 18,7 mm

British standard socket outlets 250 V~ (with signalling unit 00930 included)



20221.L⁴
SICURY 2P+E 13 A,
1-gang, switched.
Depth: 17,5 mm



20222.L⁴
SICURY 2P+E 13 A, 2-gang,
switched. Depth: 17,5 mm



20221.L.B⁴
SICURY 2P+E 13 A,
1-gang, switched.
Depth: 17,5 mm



20222.L.B⁴
SICURY 2P+E 13 A, 2-gang,
switched. Depth: 17,5 mm



20221.L.N⁴
SICURY 2P+E 13 A,
1-gang, switched.
Depth: 17,5 mm



20222.L.N⁴
SICURY 2P+E 13 A, 2-gang,
switched. Depth: 17,5 mm

British standard socket outlets 250 V~ (with signalling unit 00930 included)



20215.L⁵
SICURY 2P+E 5 A,
1-gang, switched.
Depth: 17,5 mm



20217.L⁵
SICURY 2P+E 15 A,
1-gang, switched.
Depth: 25,5 mm



20215.L.B⁵
SICURY 2P+E 5 A,
1-gang, switched.
Depth: 17,5 mm



20217.L.B⁵
SICURY 2P+E 15 A,
1-gang, switched.
Depth: 17,5 mm



20215.L.N⁵
SICURY 2P+E 5 A,
1-gang, switched.
Depth: 17,5 mm



20217.L.N⁵
SICURY 2P+E 15 A,
1-gang, switched.
Depth: 25,5 mm

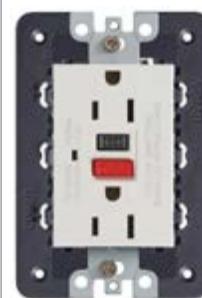
Socket outlets 125 V~ - 2P+E 15 A 60 Hz American standard



21296
Double American standard with GFCI
- 3 modules. Depth: 33,4 mm



21296.B
Double American standard with GFCI
- 3 modules. Depth: 33,4 mm



21296.N
Double American standard with GFCI
- 3 modules. Depth: 33,4 mm

Socket outlets

Grey	White	Next
British Standard 250 V~ - socket outlets and USB supply units		
		
■ 20223.A SICURY 2P+E 13 A 250 V~ with 2P 1-way switch and 1 USB-A. Depth: 21 mm	■ 20223.A.B SICURY 2P+E 13 A 250 V~ with 2P 1-way switch and 1 USB-A. Depth: 21 mm	■ 20223.A.N SICURY 2P+E 13 A 250 V~ with 2P 1-way switch and 1 USB-A. Depth: 21 mm
		
■ 20224.AC SICURY 2P+E 13 A 250 V~ with 2 2P 1-way switches, 1 USB-A and 1 USB-C. Depth: 21 mm	■ 20224.AC.B SICURY 2P+E 13 A 250 V~ with 2 2P 1-way switches, 1 USB-A and 1 USB-C. Depth: 21 mm	■ 20224.AC.N SICURY 2P+E 13 A 250 V~ with 2 2P 1-way switches, 1 USB-A and 1 USB-C. Depth: 21 mm
		
■ 20266.A SICURY 2P+E 13 A 250 V~, multistandard, with 1 2P 1-way switch and 1 USB-A. Depth: 21 mm	■ 20266.A.B SICURY 2P+E 13 A 250 V~, multistandard, with 1 2P 1-way switch and 1 USB-A. Depth: 21 mm	■ 20266.A.N SICURY 2P+E 13 A 250 V~, multistandard, with 1 2P 1-way switch and 1 USB-A. Depth: 21 mm

Possibles matches - Foreign standard plugs and socket outlets

PLUG	SOCKET OUTLET		English		Swiss	Israeli	Argentinian	Brazilianian		British standard						
	German	French	20208	20212	20214	20219	20220	20226	20240	20250	20264	20265	20221.L	20222.L	20215.L	20217.L
S10 Italian standard	•	•							•							
2P 2,5 A Europlug	•	•							•	•		•	•			
2P+E 16 A 250 V~- German standard	•								○							
2P+E 16 A 250 V~- German and French standards	•	•							○							
2P 16 A 250 V~- German and French standards	•	•							•							
2P+E 16 A 250 V~- French standard		•							○							
2P+E 10 A 250 V~- Swiss standard								•								
2P+E 16 A 250 V~- Israeli standard									•							
2P+E 10 A 250 V~- Argentinian standard										•						
2P+E 10 A 250 V~- Brazilian standard										•	•					
2P+E 20 A 250 V~- Brazilian standard											•					
2P+E 5 A 250 V~- English standard			•										•			
2P+E 13 A 250 V~- English standard				•	•							•	•			
2P+E 15 A 250 V~- English standard																•
2P 13 A 220 V~- Saudi Arabian standard											•	•				

● Plug standard matches socket outlet; ○ Plug standard matches the socket outlet without earth connection.

* Not to be used in European Countries

▲ New article

Δ Available until stocks last

Socket outlets

Grey

White

Next

Possibles matches - Foreign standard plugs and socket outlets

PLUG	SOCKET OUTLET	Multistandard		American	Euroamerican			American Saudi Arabian		Chinese			Australian
		20255	20257	20296	20234	20248	20249	20242	20243	20251	20252	20254	20262
S10 Italian standard	•	•			•	•	•						
2P,2,5 A Europlug	•	•			•	•	•						
2P+E 16 A 250 V~ German standard	○	○			○	○	○						
2P+E 16 A 250 V~ German and French standards					○	○	○						
2P 16 A 250 V~ German and French standards					•	•	•						
2P+E 16 A 250 V~ French standard					○	○	○						
2P+E 15 A 125 V~ American standard						•	•						
2P+E 10 A 250 V~ Swiss standard	•	•											
2P+E 5 A 250 V~ English standard	•	•											
2P+E 13 A 250 V~ English standard	•	•											
2P+E 15 A 125 V~ American standard				•				•	•				
2P 15 A 127 V~ American and Saudi Arabian standards								•	•				
2P+E 10 A 250 V~ Brazilian standard	•	•											
2P+E 10 A 250 V~ Chinese standard	•	•											
2P+E 16 A 250 V~ Chinese standard										•	•		
2P+E 10 A 250 V~ Australian standard	•	•										•	
2P+E 15 A 250 V~ Australian standard													•

● Plug standard matches socket outlet; ○ Plug standard matches the socket outlet without earth connection.

SICURY 2P+E interlocked socket outlets with CB and RCBO $I_{\Delta n} 10 \text{ mA}$,  (120-230 V~ 50/60 Hz)

20273
Bpresa 16 A P17/11
250 V~, 1P+N C 16
- 2 modules.
Depth: 39,7 mm



20276
16 A P30 250 V~,
1P+N C 16
- 3 modules.
Depth: 39,8 mm



20273.B
Bpresa 16 A P17/11
250 V~, 1P+N C 16
- 2 modules.
Depth: 39,7 mm



20276.B
16 A P30 250 V~,
1P+N C 16
- 3 modules.
Depth: 39,8 mm



20273.N
Bpresa 16 A P17/11
250 V~, 1P+N C 16
- 2 modules.
Depth: 39,7 mm



20276.N
16 A P30 250 V~,
1P+N C 16
- 3 modules.
Depth: 39,8 mm



20283
Bpresa 16 A P17/11
250 V~, 1P+N C 16
- 3 modules.
Depth: 39,7 mm



20286
16 A P30 250 V~,
1P+N C 16
- 4 modules.
Depth: 39,8 mm



20283.B
Bpresa 16 A P17/11
250 V~, 1P+N C 16
- 3 modules.
Depth: 39,7 mm



20286.B
16 A P30 250 V~,
1P+N C 16
- 4 modules.
Depth: 39,8 mm



20283.N
Bpresa 16 A P17/11
250 V~, 1P+N C 16
- 3 modules.
Depth: 39,7 mm



20286.N
16 A P30 250 V~,
1P+N C 16
- 4 modules.
Depth: 39,8 mm

Socket outlets

Grey

White

Next

Shaver supply units



20290
230 V~ 50/60 Hz,
with 20 VA isolating
transformer, 230 V~
and 120 V~ outputs
- 3 modules.
Depth: 42 mm



20291*
230 V~ 50/60 Hz,
with 20 VA isolating
transformer, 230 V~
and 120 V~ outputs.
Depth: 41 mm



20290.B
230 V~ 50/60 Hz,
with 20 VA isolating
transformer, 230 V~
and 120 V~ outputs
- 3 modules.
Depth: 42 mm



20291.B*
230 V~ 50/60 Hz,
with 20 VA isolating
transformer, 230 V~
and 120 V~ outputs.
Depth: 41 mm



20290.N
230 V~ 50/60 Hz,
with 20 VA isolating
transformer, 230 V~
and 120 V~ outputs
- 3 modules.
Depth: 42 mm



20291.N*
230 V~ 50/60 Hz,
with 20 VA isolating
transformer, 230 V~
and 120 V~ outputs.
Depth: 41 mm

USB supply unit



20292
5 V 1,5 A,
1 USB-A,
120-230 V~
50/60 Hz.
Depth:
37 mm



▲20292.AC
5 V 2,4 A,
USB-A+C,
120-240 V~
50/60 Hz.
Depth:
36 mm



20292.C
5 V 1,5 A,
1 USB-C,
120-240 V~
50/60 Hz.
Depth:
36 mm



20292.B
5 V 1,5 A,
1 USB-A,
120-230 V~
50/60 Hz.
Depth:
37 mm



▲20292.AC.B
5 V 2,4 A,
USB-A+C,
120-240 V~
50/60 Hz.
Depth:
36 mm



20292.C.B
5 V 1,5 A,
1 USB-C,
120-240 V~
50/60 Hz.
Depth:
36 mm



20292.N
5 V 1,5 A,
1 USB-A,
120-230 V~
50/60 Hz.
Depth:
37 mm



▲20292.AC.N
5 V 2,4 A,
USB-A+C,
120-240 V~
50/60 Hz.
Depth:
36 mm



20292.C.N
5 V 1,5 A,
1 USB-C,
120-240 V~
50/60 Hz.
Depth:
36 mm



20295
5 V 2,1 A, 2 USB-A
for total of 2,1 A,
120-230 V~
50/60 Hz
- 2 modules.
Depth: 37 mm



▲20295.AC
5 V 3 A, USB-A+C
for total of 3 A,
120-240 V~
50/60 Hz
- 2 modules.
Depth: 29 mm



20295.B
5 V 2,1 A, 2 USB-A
for total of 2,1 A,
120-230 V~
50/60 Hz
- 2 modules.
Depth: 37 mm



▲20295.AC.B
5 V 3 A, USB-A+C
for total of 3 A,
120-240 V~
50/60 Hz
- 2 modules.
Depth: 29 mm



20295.N
5 V 2,1 A, 2 USB-A
for total of 2,1 A,
120-230 V~
50/60 Hz
- 2 modules.
Depth: 37 mm



▲20295.AC.N
5 V 3 A, USB-A+C
for total of 3 A,
120-240 V~
50/60 Hz
- 2 modules.
Depth: 29 mm



▲20295.CC
5 V 3 A, 2 USB-C
for total of 3 A,
120-240 V~
50/60 Hz
- 2 modules.
Depth: 29 mm





▲20295.CC.B
5 V 3 A, 2 USB-C
for total of 3 A,
120-240 V~
50/60 Hz
- 2 modules.
Depth: 29 mm





▲20295.CC.N
5 V 3 A, 2 USB-C
for total of 3 A,
120-240 V~
50/60 Hz
- 2 modules.
Depth: 29 mm

Signal reception socket outlets

Grey	White	Next
Bluetooth® wireless technology smart sound		
		
21588 Passive speaker, 8 Ω 10 W, with built-in 8-module mounting frame. Depth: 48 mm	21588.B Passive speaker, 8 Ω 10 W, with built-in 8-module mounting frame. Depth: 48 mm	21588.N Passive speaker, 8 Ω 10 W, with built-in 8-module mounting frame. Depth: 48 mm
		
20587 Passive speaker, 8 Ω 3 W - 3 modules. Depth: 40 mm	20099 Volume control, 8 Ω 15 W - 2 modules. Depth: 30,9 mm	20099.B Volume control, 8 Ω 15 W - 2 modules. Depth: 30,9 mm
		
20590¹ 4+4 W stereo amplifier, 2 outputs for 8 Ω sound diffusers with built-in Bluetooth® wireless technology receiver, 1 LINE IN, supply voltage 12 Vdc - 2 modules. Depth: 36 mm	20590.B¹ 4+4 W stereo amplifier, 2 outputs for 8 Ω sound diffusers with built-in Bluetooth® wireless technology receiver, 1 LINE IN, supply voltage 12 Vdc - 2 modules. Depth: 36 mm	20590.N¹ 4+4 W stereo amplifier, 2 outputs for 8 Ω sound diffusers with built-in Bluetooth® wireless technology receiver, 1 LINE IN, supply voltage 12 Vdc - 2 modules. Depth: 36 mm
<p>¹ The article can be ordered with Bluetooth network customisation (see specifications on page 289)</p>		
Special socket outlets		
		
20331 2P 6 A 24 V (SELV), for plug 01616/01617. Depth: 25 mm	Δ 20333 5P DIN 41524 socket connector. Depth: 11 mm	Δ 20334 2P point-line 60130-9 IEC-07 socket connector. Depth: 11 mm
		
20331.B 2P 6 A 24 V (SELV), for plug 01616/01617. Depth: 25 mm	Δ 20333.B 5P DIN 41524 socket connector. Depth: 11 mm	Δ 20334.B 2P point-line 60130-9 IEC-07 socket connector. Depth: 11 mm
		
20331.N 2P 6 A 24 V (SELV), for plug 01616/01617. Depth: 25 mm	Δ 20333.N 5P DIN 41524 socket connector. Depth: 11 mm	Δ 20334.N 2P point-line 60130-9 IEC-07 socket connector. Depth: 11 mm
		
20345 USB outlet, screw terminals. Depth: 31,9 mm	20335 3 RCA outlets, screw terminals. Depth: 23,4 mm	20583 Spring connector for speaker. Depth: 19,4 mm
		
20345.B USB outlet, screw terminals. Depth: 31,9 mm	20335.B 3 RCA outlets, screw terminals. Depth: 23,4 mm	20583.B Spring connector for speaker. Depth: 19,4 mm
		
20345.N USB outlet, screw terminals. Depth: 31,9 mm	20335.N 3 RCA outlets, screw terminals. Depth: 23,4 mm	20583.N Spring connector for speaker. Depth: 19,4 mm

Signal reception socket outlets



Grey	White	Next									
Special socket outlets											
 20346 HDMI, Keystone connection. Depth: 37,4 mm	 20346.H HDMI, Keystone connection, 90° cable. Depth: 30,5 mm	 20348 VGA, 15-pin. Depth: 11 mm									
 Δ 20361 BNC, coaxial cable soldering. Depth: 11 mm	 Δ 20365 9-pin, D-SUB, soldering - 2 modules. Depth: 11 mm	 20346.B HDMI, Keystone connection. Depth: 37,4 mm	 20346.H.B HDMI, Keystone connection, 90° cable. Depth: 30,5 mm	 20348.B VGA, 15-pin. Depth: 11 mm	 20346.N HDMI, Keystone connection. Depth: 37,4 mm	 20346.H.N HDMI, Keystone connection, 90° cable. Depth: 30,5 mm	 20348.N VGA, 15-pin. Depth: 11 mm				
Phone jack											
 20320 RJ11, 6-position, 4-contact (6/4). Depth: 33,6 mm	 20321 RJ12, 6-position, 6-contact (6/6). Depth: 33,6 mm	 20324 Israeli standard, screw terminals. Depth: 33,4 mm	 20320.B RJ11, 6-position, 4-contact (6/4). Depth: 33,6 mm	 20321.B RJ12, 6-position, 6-contact (6/6). Depth: 33,6 mm	 20324.B Israeli standard, screw terminals. Depth: 33,4 mm	 20320.N RJ11, 6-position, 4-contact (6/4). Depth: 33,6 mm	 20321.N RJ12, 6-position, 6-contact (6/6). Depth: 33,6 mm	 20324.N Israeli standard, screw terminals. Depth: 33,4 mm			
 20327 8-contact, French standard - 2 modules. Depth: 22 mm	 20327.B 8-contact, French standard - 2 modules. Depth: 22 mm		 20327.N 8-contact, French standard - 2 modules. Depth: 22 mm								
 20322 RJ11, 6-position 4-contact (6/4) + cover. Depth: 33,4 mm Depth: 33,4 mm	 20323 RJ12, 6-position 6-contact (6/6) + cover.	 20325⁷ BT, MASTER. Depth: 33,4 mm	 20326⁷ BT, SLAVE. Depth: 33,4 mm	 20322.B RJ11, 6-position 4-contact (6/4) + cover.	 20323.B RJ12, 6-position 6-contact (6/6) + cover.	 20325.B⁷ BT, MASTER. Depth: 33,4 mm	 20326.B⁷ BT, SLAVE. Depth: 33,4 mm	 20322.N RJ11, 6-position 4-contact (6/4) + cover.	 20323.N RJ12, 6-position 6-contact (6/6) + cover.	 20325.N⁷ BT, MASTER. Depth: 33,4 mm	 20326.N⁷ BT, SLAVE. Depth: 33,4 mm

* Not to be used in European Countries

▲ New article

Δ Available until stocks last

Signal reception socket outlets

Grey	White	Next			
Coaxial TV-RD-SAT 5-2400 MHz socket outlets (output male and female)					
 20300.01 Single connection, 1 dB. Depth: 26,8 mm	 20300.10 Through-line, 10 dB. Depth: 26,8 mm	 20300.01.B Single connection, 1 dB. Depth: 26,8 mm	 20300.10.B Through-line, 10 dB. Depth: 26,8 mm	 20300.01.N Single connection, 1 dB. Depth: 26,8 mm	 20300.10.N Through-line, 10 dB. Depth: 26,8 mm
Coaxial TV-RD-SAT 5-2400 MHz socket outlets, demix (male and F-type outputs)					
 20302.01 Single connection 1 dB - 2 modules. Depth: 22,4 mm	 20302.10 Through-line 10 dB - 2 modules. Depth: 22,4 mm	 20302.01.B Single connection 1 dB - 2 modules. Depth: 22,4 mm	 20302.10.B Through-line 10 dB - 2 modules. Depth: 22,4 mm	 20302.01.N Single connection 1 dB - 2 modules. Depth: 22,4 mm	 20302.10.N Through-line 10 dB - 2 modules. Depth: 22,4 mm
Coaxial TV-FM-SAT 5-2400 MHz socket outlets (male, female and F-type outputs)					
 20303 Single connection 1 dB - 2 modules. Depth: 20,5 mm	 20303.B Single connection 1 dB - 2 modules. Depth: 20,5 mm	 20303.N Single connection 1 dB - 2 modules. Depth: 20,5 mm			
F-type socket outlets					
 20318 With F type female connector. Depth: 11 mm	 20318.B With F type female connector. Depth: 11 mm	 20318.N With F type female connector. Depth: 11 mm			
Coaxial TV 40-862 MHz socket outlets (1 output: female)					
 *20313 Single connection. Depth: 29,2 mm	 Δ*20314 Through-line 20 dB. Depth: 29,2 mm	 *20313.B Single connection. Depth: 29,2 mm	 Δ*20314.B Through-line 20 dB. Depth: 29,2 mm	 *20313.N Single connection. Depth: 29,2 mm	 Δ*20314.N Through-line 20 dB. Depth: 29,2 mm
Adaptors for coaxial TV-RD-SAT socket outlets					
 20319 For 2 or 3 outputs - 2 modules	 20319.B For 2 or 3 outputs - 2 modules	 20319.N For 2 or 3 outputs - 2 modules			

Signal reception socket outlets

Grey

White

Next

Terminal resistor and coaxial TV-RD-SAT 2400 MHz connectors



16330
Z 75 Ω, for
frequencies up to
2400 MHz



01644
Male, axial
cable entry



01645
Female, axial
cable entry



01634
Male,
90°-cable entry



01635
Female,
90°-cable entry



01654
Male F-type,
for RG59
cable

RJ45 data ports



20337.6
Cat. 6, UTP,
shuttered.
Depth: 26,1 mm
UTP. Depth:
23,6 mm



20338.8
Netsafe,
Cat. 5e,
UTP 110.
Depth: 24,7 mm
36,15 mm



20339.4
Netsafe,
Cat. 5e,
UTP 110.
Depth: 24,7 mm
36,15 mm



20339.5
Netsafe,
Cat. 5e, FTP
110. Depth:
24,7 mm 36,15 mm



20337.6.B
Cat. 6, UTP,
shuttered.
Depth: 26,1 mm
UTP. Depth:
23,6 mm



20338.8.B
Netsafe,
Cat. 5e,
UTP 110.
Depth: 24,7 mm
36,15 mm



20339.4.B
Netsafe,
Cat. 5e,
UTP 110.
Depth: 24,7 mm
36,15 mm



20339.5.B
Netsafe,
Cat. 5e, FTP
110. Depth:
24,7 mm 36,15 mm



20337.6.N
Cat. 6, UTP,
shuttered.
Depth: 26,1 mm
UTP. Depth:
23,6 mm



20338.8.N
Netsafe,
Cat. 5e,
UTP 110.
Depth: 24,7 mm
36,15 mm



20339.4.N
Netsafe,
Cat. 5e,
UTP 110.
Depth: 24,7 mm
36,15 mm



20339.5.N
Netsafe,
Cat. 5e, FTP
110. Depth:
24,7 mm 36,15 mm



20339.6
Netsafe,
Cat. 6, UTP
110. Depth:
22,3 mm



20339.11
Netsafe,
Cat. 5e,
UTP. Depth:
30,3 mm



20339.13
Netsafe,
Cat. 6,
UTP. Depth:
30,3 mm



20339.14
Netsafe,
Cat. 6,
FTP. Depth:
30,3 mm



20339.6.B
Netsafe,
Cat. 6, UTP
110. Depth:
22,3 mm



20339.11.B
Netsafe,
Cat. 5e,
UTP. Depth:
30,3 mm



20339.13.B
Netsafe,
Cat. 6,
UTP. Depth:
30,3 mm



20339.14.B
Netsafe,
Cat. 6, FTP.
Depth: 30,3 mm



20339.6.N
Netsafe,
Cat. 6, UTP
110. Depth:
22,3 mm



20339.11.N
Netsafe,
Cat. 5e,
UTP. Depth:
30,3 mm



20339.13.N
Netsafe,
Cat. 6,
UTP. Depth:
30,3 mm



20339.14.N
Netsafe,
Cat. 6, FTP.
Depth: 30,3 mm



20339.15
Netsafe,
Cat. 6,
UTP. Depth:
30,3 mm



20339.16
Netsafe,
Cat. 6,
FTP. Depth:
30,3 mm



20340.1
Panduit,
Cat. 5e,
UTP. Depth:
28,55 mm



Δ 20340.2
Panduit,
Cat. 5e,
FTP. Depth:
29,05 mm



20339.15.B
Netsafe,
Cat. 6,
UTP. Depth:
30,3 mm



20339.16.B
Netsafe,
Cat. 6,
UTP. Depth:
30,3 mm



20340.1.B
Panduit,
Cat. 5e,
UTP. Depth:
30,3 mm



Δ 20340.2.B
Panduit,
Cat. 5e,
FTP. Depth:
29,05 mm



20339.15.N
Netsafe,
Cat. 6,
UTP. Depth:
30,3 mm



20339.16.N
Netsafe,
Cat. 6,
FTP. Depth:
30,3 mm



20340.1.N
Panduit,
Cat. 5e,
UTP. Depth:
28,55 mm



Δ 20340.2.N
Panduit,
Cat. 5e,
FTP. Depth:
29,05 mm

Wi-Fi access point



20195
72,2 Mb/s with 2 LAN 10-100 Mb/s ports,
ON/OFF inputs for remote control,
230 V~ 50/60 Hz - 2 modules.
Depth: 41 mm



20195.B
72,2 Mb/s with 2 LAN 10-100 Mb/s ports,
ON/OFF inputs for remote control,
230 V~ 50/60 Hz - 2 modules.
Depth: 41 mm



20195.N
72,2 Mb/s with 2 LAN 10-100 Mb/s ports,
ON/OFF inputs for remote control,
230 V~ 50/60 Hz - 2 modules.
Depth: 41 mm

Signal reception socket outlets • Signalling

Grey	White	Next									
Adapters for data ports											
 20337.C RJ45 Keystone + cover. Depth: 10 mm	 20338.C RJ45, Cat. 5/6 AMP, Lucent T. Depth: 11 mm	 20340.C For MINI-COM Panduit. Depth: 11 mm	 20343.K Slanting adaptor for RJ45 Keystone. Depth: 11 mm	 20337.C.B RJ45 Keystone + cover. Depth: 10 mm	 20338.C.B RJ45, Cat. 5/6 AMP, Lucent T. Depth: 11 mm	 20340.C.B For MINI-COM Panduit. Depth: 11 mm	 20343.K.B Slanting adaptor for RJ45 Keystone. Depth: 11 mm	 20337.C.N RJ45 Keystone + cover. Depth: 10 mm	 20338.C.N RJ45, Cat. 5/6 AMP, Lucent T. Depth: 11 mm	 20340.C.N For MINI-COM Panduit. Depth: 11 mm	 20343.K.N Slanting adaptor for RJ45 Keystone. Depth: 11 mm
Sockets for fibre optic cable											
 20350.SC Monomode 9/125 µm, with SC/ APC simplex adapter. Depth: 19,4 mm	 20350.LC Monomode 9/125 µm, with LC duplex adapter. Depth: 19,7 mm	 20350.SC.B Monomode 9/125 µm, with SC/ APC simplex adapter. Depth: 19,4 mm	 20350.LC.B Monomode 9/125 µm, with LC duplex adapter. Depth: 19,7 mm	 20350.SC.N Monomode 9/125 µm, with SC/ APC simplex adapter. Depth: 19,4 mm	 20350.LC.N Monomode 9/125 µm, with LC duplex adapter. Depth: 19,7 mm						
 20351.SC Multimode 50/125 µm, with SC simplex adapter. Depth: 19,4 mm	 20351.LC Multimode 50/125 µm, with LC duplex adapter. Depth: 17,9 mm	 20351.SC.B Multimode 50/125 µm, with SC simplex adapter. Depth: 19,4 mm	 20351.LC.B Multimode 50/125 µm, with LC duplex adapter. Depth: 17,9 mm	 20351.SC.N Multimode 50/125 µm, with SC simplex adapter. Depth: 19,4 mm	 20351.LC.N Multimode 50/125 µm, with LC duplex adapter. Depth: 17,9 mm						
Electromechanical bells											
 20370 12 V~ (SELV) 50/60 Hz. Depth: 37 mm	 Δ 20372 120 V~ 50/60 Hz. Depth: 37 mm	 20373 230 V~ 50/60 Hz. Depth: 37 mm	 20370.B 12 V~ (SELV) 50/60 Hz. Depth: 37 mm	 Δ 20372.B 120 V~ 50/60 Hz. Depth: 37 mm	 20373.B 230 V~ 50/60 Hz. Depth: 37 mm	 20370.N 12 V~ (SELV) 50/60 Hz. Depth: 37 mm	 Δ 20372.N 120 V~ 50/60 Hz. Depth: 37 mm	 20373.N 230 V~ 50/60 Hz. Depth: 37 mm			
Electronic bells											
 20380 3-sound-sequence, supply voltage 12 V~ and 12 Vdc (SELV) - 2 modules. Depth: 37 mm	 20380.B 3-sound-sequence, supply voltage 12 V~ and 12 Vdc (SELV) - 2 modules. Depth: 37 mm	 20380.N 3-sound-sequence, supply voltage 12 V~ and 12 Vdc (SELV) - 2 modules. Depth: 37 mm									

Signalling

Grey

White

Next

Buzzers



20375
12 V~ (SELV)
50/60 Hz.
Depth: 37 mm

20378
230 V~
50/60 Hz.
Depth: 37 mm



20375.B
12 V~ (SELV)
230 V~
50/60 Hz.
Depth: 37 mm

20378.B
230 V~
50/60 Hz.
Depth: 37 mm



20375.N
12 V~ (SELV)
50/60 Hz.
Depth: 37 mm

20378.N
230 V~
50/60 Hz.
Depth: 37 mm

Luminous indicator units (for 1 or 2 signalling units°)



20386.B
White
diffuser.
Depth: 23 mm

20388
Neutral
diffusers.
Depth: 23 mm



20386.B.B
White
diffuser.
Depth: 23 mm

20388.B
Neutral
diffusers.
Depth: 23 mm



20386.B.N
White
diffuser.
Depth: 23 mm

20388.N
Neutral
diffusers.
Depth: 23 mm


Prismatic indicator units - 2 modules (for 14771 and 14777 lamps - supplied without lamp)



20387.B
White diffuser
- 2 modules.
Depth: 25 mm



20387.R
Red diffuser
- 2 modules.
Depth: 25 mm



20387.V
Green diffuser
- 2 modules.
Depth: 25 mm

Step marker lamps (with high-efficiency LED)



20381
230 V~ 50/60 Hz
20381.012
12 V~ 50/60 Hz or
12 Vdc (SELV).
Depth: 37 mm



20381.B
230 V~ 50/60 Hz
20381.012.B
12 V~ 50/60 Hz or
12 Vdc (SELV).
Depth: 37 mm



20381.N
230 V~ 50/60 Hz
20381.012.N
12 V~ 50/60 Hz or
12 Vdc (SELV).
Depth: 37 mm



20389
230 V~ 50/60 Hz
- 2 modules.
Depth: 37 mm



20389.B
230 V~ 50/60 Hz
- 2 modules.
Depth: 37 mm



20389.N
230 V~ 50/60 Hz
- 2 modules.
Depth: 37 mm

Signalling

Grey


White

Next

Lighting devices



20383
With high-efficiency LED,
120-230 V~ 50/60 Hz
- 3 modules.
Depth: 37 mm



20383.B
With high-efficiency LED,
120-230 V~ 50/60 Hz
- 3 modules.
Depth: 37 mm



20383.N
With high-efficiency LED,
120-230 V~ 50/60 Hz
- 3 modules.
Depth: 37 mm



02671
With high-efficiency LED, 120-230 V~ 50/60 Hz
and built-in 7-module frame.
Depth: 44,7 mm

TORCIA, electronic hand-lamps (with automatic emergency device)



20395
With high-efficiency LED,
230 V~ 50/60 Hz
- 2 modules.
Depth: 46 mm



20396
With high-efficiency LED,
120 V~ 50/60 Hz
- 2 modules.
Depth: 46 mm



20395.B
With high-efficiency LED,
230 V~ 50/60 Hz
- 2 modules.
Depth: 46 mm



20396.B
With high-efficiency LED,
120 V~ 50/60 Hz
- 2 modules.
Depth: 46 mm



20395.N
With high-efficiency LED,
230 V~ 50/60 Hz
- 2 modules.
Depth: 46 mm



20396.N
With high-efficiency LED,
120 V~ 50/60 Hz
- 2 modules.
Depth: 46 mm

Emergency lighting devices (with automatic emergency device)



20382
With high-efficiency LED,
230 V~ 50/60 Hz.
Depth: 37 mm



20384
With high-efficiency LED,
120-230 V~ 50/60 Hz
- 3 modules.
Depth: 37 mm



20382.B
With high-efficiency LED,
230 V~ 50/60 Hz.
Depth: 37 mm



20384.B
With high-efficiency LED,
120-230 V~ 50/60 Hz
- 3 modules.
Depth: 37 mm

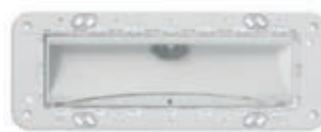


20382.N
With high-efficiency LED,
230 V~ 50/60 Hz.
Depth: 37 mm



20384.N
With high-efficiency LED,
120-230 V~ 50/60 Hz
- 3 modules.
Depth: 37 mm

Emergency lighting devices



02661
With high-efficiency LED, 230 V~ 50/60 Hz,
rechargeable Ni-Cd battery and built-in
7-module frame. Depth: 44,7 mm



20394
230 V~ 50/60 Hz, Ni-Cd battery, with FD 4W
G5 lamp and built-in 7-module frame.
Depth: 47,1 mm



02662
LED, controllable,
230 V~ 50 Hz
- 3 modules
02662.120
As above, 120 V~.
Depth: 39 mm



02663
LED RGB, controllable,
230 V~ 50 Hz
- 3 modules
02663.120
As above, 120 V~.
Depth: 39 mm

Rechargeable batteries



00908
3 x Ni-MH 1,2 V
800 mAh,
HR03 (AAA)



00910
Ni-MH 4,8 V 80 mAh
battery, spare part
for TORCIA




00911.1
Ni-Cd 2,4 V 1,3 Ah battery,
spare part for emergency
lighting devices (20394)



00913
Ni-Cd 4,8 V 800 mAh
spare rechargeable battery
for 02661

Protection • Detection

Grey	White	Next
Protection devices		
 20416 1P 16 A 250 V~ fuse carrier. Depth: 29 mm	 20417 230 V~ SPD transient voltage suppressor. Depth: 29 mm	 20417.R Spare part for 20417
 20416.B 1P 16 A 250 V~ fuse carrier. Depth: 29 mm	 20417.B 230 V~ SPD transient voltage suppressor. Depth: 29 mm	 20416.N 1P 16 A 250 V~ fuse carrier. Depth: 29 mm
1P+N circuit breakers (120-230 V~ 50/60 Hz)		
 20405.06 C 6, breaking capacity 1500 A. Depth: 39 mm	 20405.10 C 10, breaking capacity 3000 A. Depth: 39 mm	 20405.16 C 16, breaking capacity 3000 A. Depth: 39 mm
 20405.06.B C 6, breaking capacity 1500 A. Depth: 39 mm	 20405.10.B C 10, breaking capacity 3000 A. Depth: 39 mm	 20405.16.B C 16, breaking capacity 3000 A. Depth: 39 mm
 20405.06.N C 6, breaking capacity 1500 A. Depth: 39 mm	 20405.10.N C 10, breaking capacity 3000 A. Depth: 39 mm	 20405.16.N C 16, breaking capacity 3000 A. Depth: 39 mm
1P+N residual current breakers with overcurrent protection (RCBO) (120-230 V~ 50/60 Hz 		
 20411.06 C 6, $I_{\Delta n}$ 10 mA breaking capacity 1500 A - 2 modules. Depth: 39 mm	 20411.10 C 10, $I_{\Delta n}$ 10 mA breaking capacity 3000 A - 2 modules. Depth: 39 mm	 20411.06.B C 6, $I_{\Delta n}$ 10 mA breaking capacity 1500 A - 2 modules. Depth: 39 mm
 20411.10.B C 10, $I_{\Delta n}$ 10 mA breaking capacity 3000 A - 2 modules. Depth: 39 mm	 20411.06.N C 6, $I_{\Delta n}$ 10 mA breaking capacity 1500 A - 2 modules. Depth: 39 mm	 20411.10.N C 10, $I_{\Delta n}$ 10 mA breaking capacity 3000 A - 2 modules. Depth: 39 mm
 20411.16 C 16, $I_{\Delta n}$ 10 mA breaking capacity 3000 A - 2 modules. Depth: 39 mm	 20411.16.6 C 16, $I_{\Delta n}$ 6 mA breaking capacity 3000 A - 2 modules. Depth: 39 mm	 20411.16.B C 16, $I_{\Delta n}$ 10 mA breaking capacity 3000 A - 2 modules. Depth: 39 mm
 20411.16.6.B C 16, $I_{\Delta n}$ 6 mA breaking capacity 3000 A - 2 modules. Depth: 39 mm	 20411.16.N C 16, $I_{\Delta n}$ 10 mA breaking capacity 3000 A - 2 modules. Depth: 39 mm	 20411.16.6.N C 16, $I_{\Delta n}$ 6 mA breaking capacity 3000 A - 2 modules. Depth: 39 mm
Detectors (230 V~ 50/60 Hz)		
 20420 Gas Stop Metano, methane gas detector, solenoid valve control - 3 modules. Depth: 37 mm	 20421 Gas Stop GPL, LPG gas detector, solenoid valve control - 3 modules. Depth: 37 mm	 20420.B Gas Stop Metano, methane gas detector, solenoid valve control - 3 modules. Depth: 37 mm
 20421.B Gas Stop GPL, LPG gas detector, solenoid valve control - 3 modules. Depth: 37 mm	 20420.N Gas Stop Metano, methane gas detector, solenoid valve control - 3 modules. Depth: 37 mm	 20421.N Gas Stop GPL, LPG gas detector, solenoid valve control - 3 modules. Depth: 37 mm



Δ 01899

Gas test cylinder for testing Gas Stop Metano and GPL detectors

Comfort • Climate

Grey

White

Next

Clocks (120-230 V~ 50/60 Hz)



20448
24h/7day timer-switch, 1-canal,
8 A 230 V~ change-over relay
output - 2 modules.
Depth: 37 mm



Δ 20449
Electronic alarm
clock - 2 modules.
Depth: 37 mm



20448.B
24h/7day timer-switch, 1-canal,
8 A 230 V~ change-over relay
output - 2 modules.
Depth: 37 mm



Δ 20449.B
Electronic alarm
clock - 2 modules.
Depth: 37 mm



20448.N
24h/7day timer-switch, 1-canal,
8 A 230 V~ change-over relay
output - 2 modules.
Depth: 37 mm



Δ 20449.N
Electronic alarm
clock - 2 modules.
Depth: 37 mm

Electronic thermostats (heating and air-conditioning, 120-230 V~ 50/60 Hz)



02950
Touch screen thermostat for ON/OFF and PID
temperature control, 1 input for temperature
sensor, 1 multi-function input, 5(2) A 230 V~
change-over relay output - 2 modules.
Depth: 38,5 mm



02950.B
Touch screen thermostat for ON/OFF and PID
temperature control, 1 input for temperature
sensor, 1 multi-function input, 5(2) A 230 V~
change-over relay output - 2 modules.
Depth: 38,5 mm



02950.BN
Touch screen thermostat for ON/OFF and PID
temperature control, 1 input for temperature
sensor, 1 multi-function input, 5(2) A 230 V~
change-over relay output - 2 modules.
Depth: 38,5 mm

Electronic timer-thermostats (heating and air-conditioning)



02955
Touch screen timer-thermostat for ON/OFF and PID
temperature control, 1 input for temperature sensor,
1 multi-function input, 1 RJ9 input for energy meter (02960),
5(2) A 230 V~ change-over relay output - 3 modules.
Depth: 35,3 mm



02955.B
Touch screen timer-thermostat for ON/OFF and PID
temperature control, 1 input for temperature sensor,
1 multi-function input, 1 RJ9 input for energy meter (02960),
5(2) A 230 V~ change-over relay output - 3 modules.
Depth: 35,3 mm



02955.BN
Touch screen timer-thermostat for ON/OFF and PID
temperature control, 1 input for temperature sensor,
1 multi-function input, 1 RJ9 input for energy meter (02960),
5(2) A 230 V~ change-over relay output - 3 modules.
Depth: 35,3 mm



20445
6(2) A 230 V~ change-over
relay output, 120-230 V~
50/60 Hz - 2 modules.
Depth: 37 mm



20446
5(2) A 250 V~ change-over relay
output, AA LR6 1,5 V battery
(supplied) - 3 modules.
Depth: 43 mm



20445.B
6(2) A 230 V~ change-over relay
output, 120-230 V~
50/60 Hz - 2 modules.
Depth: 37 mm



20446.B
5(2) A 250 V~ change-over relay
output, AA LR6 1,5 V battery
(supplied) - 3 modules.
Depth: 43 mm



20445.N
6(2) A 230 V~ change-over relay
output, 120-230 V~
50/60 Hz - 2 modules.
Depth: 37 mm



20446.N
5(2) A 250 V~ change-over relay
output, AA LR6 1,5 V battery
(supplied) - 3 modules.
Depth: 43 mm

Electronic sensors



20432
Electronic
temperature sensor.
Depth: 24,4 mm



20433
Electronic humidity sensor,
1 0-10 V or 4-20 mA
output- 2 modules.
Depth: 37 mm



20432.B
Electronic
temperature sensor.
Depth: 24,4 mm



20433.B
Electronic humidity sensor,
1 0-10 V or 4-20 mA
output- 2 modules.
Depth: 37 mm





20432.N
Electronic
temperature sensor.
Depth: 24,4 mm



20433.N
Electronic humidity sensor,
1 0-10 V or 4-20 mA
output- 2 modules.
Depth: 37 mm

Climate • Stand alone solutions

Grey	White	Next			
Switches for fan-coil regulation					
 20095 Slide, 1P 6(2) A 250 V~, 4-position. Depth: 40 mm	 20096 Rotary, 1P 6(3) A 250 V~, 4-position - 2 modules. Depth: 37 mm	 20095.B Slide, 1P 6(2) A 250 V~, 4-position - 2 modules. Depth: 40 mm	 20096.B Rotary, 1P 6(3) A 250 V~, 4-position - 2 modules. Depth: 37 mm	 20095.N Slide, 1P 6(2) A 250 V~, 4-position. Depth: 40 mm	 20096.N Rotary, 1P 6(3) A 250 V~, 4-position - 2 modules. Depth: 37 mm
Power meter					
 02960 3 inputs for sensor 01457, 50 W-10 kW detectable power, for DIN (60715 TH35) rail installation 1x17,5 mm. Supplied with 01457	Wired temperature sensor				
	 02965.1 Wired temperature sensor, NTC 10 kΩ, cable length 3 m				
Video door entry system					
 Δ 21554 4,3" Full Flat, for Due Fili Plus video door system and control, temperature sensor input, with built-in 8-module mounting frame. Depth: 46,7 mm	 Δ 21554.B 4,3" Full Flat, for Due Fili Plus video door system and control, temperature sensor input, with built-in 8-module mounting frame. Depth: 46,7 mm	 Δ 21554.BN 4,3" Full Flat, for Due Fili Plus video door system and control, temperature sensor input, with built-in 8-module mounting frame. Depth: 46,7 mm			
 Δ 01963 Due Fili Plus video door entry system module					
 20557 Speakerphone for Due Fili system - 3 modules Depth: 37 mm	 20557.B Speakerphone for Due Fili system - 3 modules Depth: 37 mm	 20557.N Speakerphone for Due Fili system - 3 modules Depth: 37 mm			
 20577 Call button for Due Fili system - 3 modules Depth: 37 mm	 20577.B Call button for Due Fili system - 3 modules Depth: 37 mm	 20577.N Call button for Due Fili system - 3 modules Depth: 37 mm			
 Δ 20560 Inner color video camera. Depth: 37 mm	 Δ 20565 Inner color video camera and built-in microphone - 2 modules. Depth: 26,5 mm	 20570 Inner light, with LED. Depth: 37 mm			
 Δ 20560.B Inner color video camera. Depth: 37 mm	 Δ 20565.B Inner color video camera and built-in microphone - 2 modules. Depth: 26,5 mm	 20570.B Inner light, with LED. Depth: 37 mm			
 Δ 20560.N Inner color video camera. Depth: 37 mm	 Δ 20565.N Inner color video camera and built-in microphone - 2 modules. Depth: 26,5 mm	 20570.N Inner light, with LED. Depth: 37 mm			

* Not to be used in European Countries

▲ New article

Δ Available until stocks last

Hotel solutions

Grey


White

Next

Hotel solutions

**02686**

Control device with four push buttons
1P NO 12 vdc 50 mA max., to be completed with 2-module back-lightable interchangeable button caps
- 2 modules. Depth: 15 mm

**21125**

8 non-polarised inputs, 7 solid state outputs for non-polarised contacts,
9-32 VDC power supply, for external/internal hotel room or cabin applications
- 3 modules. Depth: 22,8 mm

**20026.DND**
Do Not Disturb
with diffuser**20026.PLS**
Please Clean
with diffuser**20026.DND.B**
Do Not Disturb
with diffuser**20026.PLS.B**
Please Clean
with diffuser**20026.DND.N**
Do Not Disturb
with diffuser**20026.PLS.N**
Please Clean
with diffuser**20099**
Volume control,
8 Ω 15 W - 2 modules.
Depth: 30,9 mm**20099.B**
Volume control,
8 Ω 15 W - 2 modules.
Depth: 30,9 mm**20099.N**
Volume control,
8 Ω 15 W - 2 modules.
Depth: 30,9 mm**20097**
NO 10 A 230 V~, for hotel
"Do Not Disturb" and "Please
Clean" lightable - 2 modules.
Depth: 29 mm**00975**
Card to customise
for 20097 button**02685**
4 signalling indicator: IN, Do Not Disturb,
OUT, waitress symbol, white - 2 modules.
Depth: 22 mm**20290**
230 V~ 50/60 Hz,
with 20 VA isolating
transformer, 230 V~
and 120 V~ outputs.
- 3 modules.
Depth: 42 mm**20291⁶**
230 V~ 50/60 Hz,
with 20 VA isolating
transformer, 230 V~
and 120 V~ outputs.
Depth: 41 mm**20290.B**
230 V~ 50/60 Hz,
with 20 VA isolating
transformer, 230 V~
and 120 V~ outputs.
- 3 modules.
Depth: 42 mm**20291.B⁶**
230 V~ 50/60 Hz,
with 20 VA isolating
transformer, 230 V~
and 120 V~ outputs.
Depth: 41 mm**20290.N**
230 V~ 50/60 Hz,
with 20 VA isolating
transformer, 230 V~
and 120 V~ outputs.
- 3 modules.
Depth: 42 mm**20291.N⁶**
230 V~ 50/60 Hz,
with 20 VA isolating
transformer, 230 V~
and 120 V~ outputs.
Depth: 41 mm**02690**
Lighting switch, 2000 W incandescent lamps,
CFL 10-1000 W, LED 100 W, 220-240 V~
50/60 Hz, ceiling mounting

Hotel solutions

Grey

White

Next

Hotel solutions

Access control system



20461
Smart card reader/programmer,
12-24 V~ 50/60 Hz/ 12-24 Vdc
(SELV) - 3 modules.
Depth: 37 mm



20461.B
Smart card reader/programmer,
12-24 V~ 50/60 Hz/ 12-24 Vdc
(SELV) - 3 modules.
Depth: 37 mm



20461.N
Smart card reader/programmer,
12-24 V~ 50/60 Hz/ 12-24 Vdc
(SELV) - 3 modules.
Depth: 37 mm



20463
Electronic switch, vertical
socket, 120-230 V~
50/60 Hz - 2 modules.
Depth: 20,5 mm



20465
Electronic switch, vertical
socket, 230 V~ 50/60 Hz,
24 V~/24 Vdc (SELV)
- 3 modules.
Depth: 37 mm



20463.B
Electronic switch, vertical
socket, 120-230 V~
50/60 Hz - 2 modules.
Depth: 20,5 mm



20465.B
Electronic switch, vertical
socket, 230 V~ 50/60 Hz,
24 V~/24 Vdc (SELV)
- 3 modules.
Depth: 37 mm



20463.N
Electronic switch, vertical
socket, 120-230 V~
50/60 Hz - 2 modules.
Depth: 20,5 mm



20465.N
Electronic switch, vertical
socket, 230 V~ 50/60 Hz,
24 V~/24 Vdc (SELV)
- 3 modules.
Depth: 37 mm



20468
NFC/RFID electronic reader,
suitable for **AGB Electronic
Solutions** for hotel, vertical
socket, 120-230 V~
50/60 Hz - 3 modules.
Depth: 30,5 mm



20468.1
NFC/RFID electronic reader,
suitable for **CISA Electronic
Solutions** for hotel, vertical
socket, 120-230 V~
50/60 Hz - 3 modules.
Depth: 30,5 mm



20468.B
NFC/RFID electronic reader,
suitable for **AGB Electronic
Solutions** for hotel, vertical
socket, 120-230 V~
50/60 Hz - 3 modules.
Depth: 30,5 mm



20468.1.N
NFC/RFID electronic reader,
suitable for **CISA Electronic
Solutions** for hotel, vertical
socket, 120-230 V~
50/60 Hz - 3 modules.
Depth: 30,5 mm



20468.N
NFC/RFID electronic reader,
suitable for **AGB Electronic
Solutions** for hotel, vertical
socket, 120-230 V~
50/60 Hz - 3 modules.
Depth: 30,5 mm



20468.1.N
NFC/RFID electronic reader,
suitable for **CISA Electronic
Solutions** for hotel, vertical
socket, 120-230 V~
50/60 Hz - 3 modules.
Depth: 30,5 mm



20469
NFC/RFID electronic reader,
suitable for **Mifare Electronic
Solutions** for hotel, vertical
socket, 120-230 V~
50/60 Hz - 3 modules.
Depth: 30,5 mm



20469.B
NFC/RFID electronic reader,
suitable for **Mifare Electronic
Solutions** for hotel, vertical
socket, 120-230 V~
50/60 Hz - 3 modules.
Depth: 30,5 mm



20469.N
NFC/RFID electronic reader,
suitable for **Mifare Electronic
Solutions** for hotel, vertical
socket, 120-230 V~
50/60 Hz - 3 modules.
Depth: 30,5 mm



16452
Programmable smart card
16452.H
As above, customizable



16452.S
ISO-card (badge)

Hotel solutions

Grey

White

Next

Hotel solutions

Bus access control system



20470
Transponder card
and key reader
- 2 modules.
Depth: 26,5 mm



20471
Smart card reader
and programmer
- 3 modules.
Depth: 37 mm



20470.B
Transponder card
and key reader
- 2 modules.
Depth: 26,5 mm



20471.B
Smart card reader
and programmer
- 3 modules.
Depth: 37 mm



20470.N
Transponder card
and key reader
- 2 modules.
Depth: 26,5 mm



20471.N
Smart card reader
and programmer
- 3 modules.
Depth: 37 mm



20472
Actuator with 3 A
30 V change-over relay
output - 2 modules.
Depth: 26,5 mm



20472.B
Actuator with 3 A
30 V change-over relay
output - 2 modules.
Depth: 26,5 mm



20472.N
Actuator with 3 A
30 V change-over relay
output - 2 modules.
Depth: 26,5 mm



20473
Smart card programmer
in table mounting box
- 4 modules



20473.B
Smart card programmer
in table mounting box
- 4 modules



20473.N
Smart card programmer
in table mounting box
- 4 modules



01816
Transponder card
01816.H
As above, customizable



01815
Transponder key



16452
Programmable smart card
16452.H
As above, customizable



16474
Smart card for serial
connection of reader/
programmer



01400
Supply unit, 29 Vdc
400 mA output,
230 V~ 50/60 Hz,
2 x 17,5 mm modules



01401
Supply unit, 29 Vdc
1280 mA output,
120-230 V~ 50/60 Hz,
8 x 17,5 mm modules

EIKON TACTIL - Cover plates**Luminosi**

(Bevelled crystal)



70 White diamond



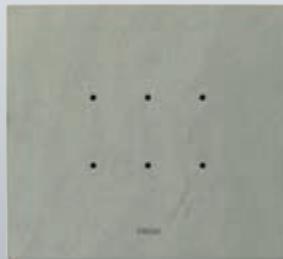
71 Aqua



76 Black Diamond

Scolpiti

(Carved stone)



■ 53 Grey quartzite

Naturali

(Solid wood)



■ 31 Italian walnut



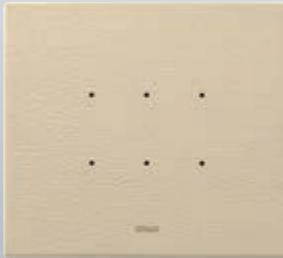
■ 32 White Oak



■ 33 Wengé

Raffinati

(Natural leather)




■ 21 Cream



■ 22 Tobacco

Speciali

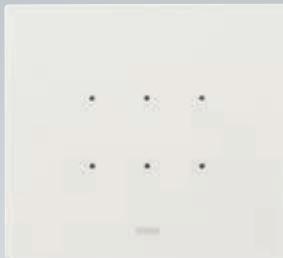(Corian®)



■ 41 Glacier ice

EIKON TACTIL - Cover plates



73 Pearl grey



EIKON EVO - Cover plates

Primari

(Anodized aluminium)



01 Brilliant Aluminium



02 Next Grey



03 Lava Grey

Esclusivi

(Refined aluminium)



06 Black Sapphire



07.01 Silver



08 Titanium

Scolpiti

(Carved stone)



51 Carrara white



52 Natural split slate



53 Grey quartzite

Naturali

(Solid wood)



31 Italian walnut



32 White Oak



33 Wengé

EIKON EVO - Cover plates



04 Neutral Bronze



05 Dark Bronze



09 Polished gold



10 Satin gold



G09 Total polished gold



G10 Total satin gold

EIKON EVO - Cover plates**Luminosi**

(Bevelled crystal)



70 White diamond



71 Aqua



72 Silver ice

Raffinati

(Natural leather)



21 Cream



22 Tobacco

Speciali

(Corian®)



41 Glacier ice

Essenziali

(Total aluminium and crystal)



17 Total white



18 Total black



87 Total white diamond

EIKON EVO - Cover plates

73 Pearl grey



74 Opal brown



75 Bronze mirror



76 Black diamond



88 Total black diamond

EIKON EXÉ - The collections - Cover plates

FLAT**Total look metals**

01 Matt white



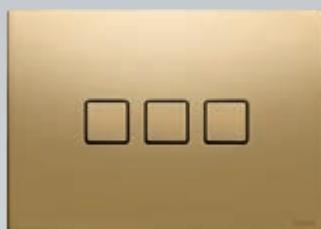
03 Anthracite grey

Brushed metals


11 Brushed nickel



12 Brushed dark bronze

Polished metals

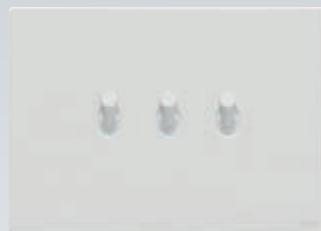82 Gold

EIKON EXÉ - The collections - Cover plates**VINTAGE****Total look metals**

01 Matt white



03 Anthracite grey

Brushed metals

11 Brushed nickel



12 Brushed dark bronze

Polished metals

82 Gold

EIKON EXÉ - Cover plates

Total look metals

01 Matt white



02 Next



03 Anthracite grey

Brushed metals

11 Brushed nickel



12 Brushed dark bronze



13 Brushed black

Polished metals

81 Nickel



82 Gold



83 Black chrome

Exclusive metals

85 Antique gold



86 Brushed copper



87 Antique brushed bronze

Glass

71 Milky white



72 Canvas white



73 Satin black

EIKON EXÉ - Cover plates**Mirrors**

75 Ice silver



76 Shiny bronze



77 Opal brown

Leather

21 Savannah



22 Steppe



23 Black forest

Marbled stoneware

51 White Calacatta



52 Coffee brown



53 Black Marquina

Wood

31 Oak



32 American walnut



33 Eucalyptus

EIKON CHROME - Classic cover plates

Total look

(Varnished metal)



B01 Arctic white



N13 Matt silver



15 Matt anthracite

Bright

(Varnished metal)



C01 Arctic white



C02 Antique white



C07 Metallic champagne



C08 Metallic titanium



C10 Metallic silver



C12 Metallic anthracite



C13 Matt silver



C14 Matt titanium



C15 Matt anthracite

Refined

(Refined metal)



C22 Satin nickel



G24 Polished gold

Inox

(Stainless steel)



C91 Brushed inox

EIKON CHROME - Round cover plates**Total look**

(Varnished metal)



B01 Arctic white



N13 Matt silver



15 Matt anthracite

Bright

(Varnished metal)



C01 Arctic white



C02 Antique white



C13 Matt silver



C14 Matt titanium



C15 Matt anthracite

Refined

(Refined metal)



G21 Satin gold

Eikon Tactil and Eikon Evo cover plates: guideline

	2-module	3-module		4-module		7-module
	Eikon Tactil	Eikon Evo	Eikon Tactil	Eikon Evo	Eikon Tactil	Eikon Evo
Primari (Anodized aluminium)						
Brilliant Aluminium	-	21642.01	-	21653.01	-	21654.01
Next Grey	-	21642.02	-	21653.02	-	21654.02
Lava Grey	-	21642.03	-	21653.03	-	21654.03
Neutral Bronze	-	21642.04	-	21653.04	-	21654.04
Dark Bronze	-	21642.05	-	21653.05	-	21654.05
Esclusivi (Refined aluminium)						
Black Sapphire	-	21642.06	-	21653.06	-	21654.06
Silver	-	21642.07.01	-	21653.07.01	-	21654.07.01
Titanium	-	21642.08	-	21653.08	-	21654.08
Polished gold	-	21642.09	-	21653.09	-	21654.09
Total polished gold (with gold frame)	-	21642.G09	-	21653.G09	-	21654.G09
Satin gold	-	21642.10	-	21653.10	-	21654.10
Total satin gold (with gold frame)	-	21642.G10	-	21653.G10	-	21654.G10
Scolpiti (Carved stone)						
Carrara white	-	21642.51	-	21653.51	-	21654.51
Natural split slate	-	21642.52	-	21653.52	-	21654.52
Grey quartzite	■ 21662.53	21642.53	■ 21663.53	21653.53	■ 21664.53	21654.53
Naturali (Solid wood)						
Italian walnut	■ 21662.31	21642.31	■ 21663.31	21653.31	■ 21664.31	21654.31
White Oak	■ 21662.32	21642.32	■ 21663.32	21653.32	■ 21664.32	21654.32
Wengé	■ 21662.33	21642.33	■ 21663.33	21653.33	■ 21664.33	21654.33
Luminosi (Bevelled crystal)						
White diamond	21662.70	21642.70	21663.70	21653.70	21664.70	21654.70
Aqua	21662.71	21642.71	21663.71	21653.71	21664.71	21654.71
Silver ice	-	21642.72	-	21653.72	-	21654.72
Pearl grey	21662.73	21642.73	21663.73	21653.73	21664.73	21654.73
Opal brown	-	21642.74	-	21653.74	-	21654.74
Bronze mirror	-	21642.75	-	21653.75	-	21654.75
Black Diamond	21662.76	21642.76	21663.76	21653.76	21664.76	21654.76
Raffinati (Natural leather)						
Cream	■ 21662.21	21642.21	■ 21663.21	21653.21	■ 21664.21	21654.21
Tobacco	■ 21662.22	21642.22	■ 21663.22	21653.22	■ 21664.22	21654.22
Speciali (Corian®)						
Glacier ice	■ 21662.41	21642.41	■ 21663.41	21653.41	■ 21664.41	21654.41
Essenziali (Total aluminium and crystal)						
Total White	-	21642.17	-	21653.17	-	21654.17
Total Black	-	21642.18	-	21653.18	-	21654.18
Total White Diamond	-	21642.87	-	21653.87	-	21654.87
Total Black Diamond	-	21642.88	-	21653.88	-	21654.88

Eikon Tactil and Eikon Evo cover plates: guideline

8-module Eikon Evo	2+2-module (between centres 71 mm) Eikon Evo	2+2+2-module (between centres 71 mm) Eikon Evo	2+2+2+2-module (between centres 71 mm) Eikon Evo
			
21668.01	21643.01	21644.01	21669.01
21668.02	21643.02	21644.02	21669.02
21668.03	21643.03	21644.03	21669.03
21668.04	21643.04	21644.04	21669.04
21668.05	21643.05	21644.05	21669.05
21668.06	21643.06	21644.06	21669.06
21668.07.01	21643.07.01	21644.07.01	21669.07.01
21668.08	21643.08	21644.08	21669.08
21668.09	21643.09	21644.09	21669.09
21668.G09	21643.G09	21644.G09	21669.G09
21668.10	21643.10	21644.10	21669.10
21668.G10	21643.G10	21644.G10	21669.G10
21668.51	-	-	-
21668.52	-	-	-
21657.53	-	-	-
21668.31	-	-	-
21657.32	-	-	-
21668.33	-	-	-
21668.70	21643.70	21644.70	21669.70
21668.71	21643.71	21644.71	21669.71
21668.72	21643.72	21644.72	21669.72
21668.73	21643.73	21644.73	21669.73
21668.74	21643.74	21644.74	21669.74
21668.75	21643.75	21644.75	21669.75
21668.76	21643.76	21644.76	21669.76
21668.21	-	-	-
21668.22	-	-	-
21668.41	-	-	-
21668.17	21643.17	21644.17	21669.17
21668.18	21643.18	21644.18	21669.18
21668.87	21643.87	21644.87	21669.87
21668.88	21643.88	21644.88	21669.88

Eikon Exé - The collections cover plates: guideline

Flat cover plates	3-module			
	1-gang ¹	2-gang ¹	3-gang	6-gang
				
Total look metals				
Matt white	22683.1.01	22683.2.01	22683.3.01	22693.01
Anthracite grey	22683.1.03	22683.2.03	22683.3.03	22693.03
Brushed metals				
Brushed nickel	22683.1.11	22683.2.11	22683.3.11	22693.11
Brushed dark bronze	22683.1.12	22683.2.12	22683.3.12	22693.12
Polished metals				
Gold	22683.1.82	22683.2.82	22683.3.82	22693.82

¹ it is necessary to use 21041 blank module when 21613 mounting frame is installed with 22683.1 and 22683.2 cover plates.

Flat cover plates	2-module			4-module
	1-gang	2-gang	4-gang	8-gang
				
Total look metals				
Matt white	22682.1.01	22682.2.01	22692.01	22694.01
Anthracite grey	22682.1.03	22682.2.03	22692.03	22694.03
Brushed metals				
Brushed nickel	22682.1.11	22682.2.11	22692.11	22694.11
Brushed dark bronze	22682.1.12	22682.2.12	22692.12	22694.12
Polished metals				
Gold	22682.1.82	22682.2.82	22692.82	22694.82

Vintage cover plates	2-module		3-module		
	1-gang	2-gang	1-gang	2-gang	3-gang
					
Total look metals					
Matt white	22672.1.01	22672.2.01	22673.1.01	22673.2.01	22673.3.01
Anthracite grey	22672.1.03	22672.2.03	22673.1.03	22673.2.03	22673.3.03
Brushed metals					
Brushed nickel	22672.1.11	22672.2.11	22673.1.11	22673.2.11	22673.3.11
Brushed dark bronze	22672.1.12	22672.2.12	22673.1.12	22673.2.12	22673.3.12
Polished metals					
Gold	22672.1.82	22672.2.82	22673.1.82	22673.2.82	22673.3.82


Eikon Exé cover plates: guideline

	2-module	3-module	4-module	7-module	8-module
					
Total look metals					
 Matt white	22642.01	22653.01	22654.01	22657.01	22668.01
 Next	22642.02	22653.02	22654.02	22657.02	22668.02
 Anthracite grey	22642.03	22653.03	22654.03	22657.03	22668.03
Brushed metals					
 Brushed nickel	22642.11	22653.11	22654.11	22657.11	22668.11
 Brushed dark bronze	22642.12	22653.12	22654.12	22657.12	22668.12
 Brushed black	22642.13	22653.13	22654.13	22657.13	22668.13
Polished metals					
 Nickel	22642.81	22653.81	22654.81	22657.81	22668.81
 Gold	22642.82	22653.82	22654.82	22657.82	22668.82
 Black chrome	22642.83	22653.83	22654.83	22657.83	22668.83
Exclusive metals					
 Antique gold	22642.85	22653.85	22654.85	22657.85	22668.85
 Brushed copper	22642.86	22653.86	22654.86	22657.86	22668.86
 Antique brushed bronze	22642.87	22653.87	22654.87	22657.87	22668.87
Glass					
 Milky white	22642.71	22653.71	22654.71	22657.71	22668.71
 Canvas white	22642.72	22653.72	22654.72	22657.72	22668.72
 Satin black	22642.73	22653.73	22654.73	22657.73	22668.73
Mirrors					
 Ice silver	22642.75	22653.75	22654.75	22657.75	22668.75
 Shiny bronze	22642.76	22653.76	22654.76	22657.76	22668.76
 Opal brown	22642.77	22653.77	22654.77	22657.77	22668.77
Leather					
 Savannah	22642.21	22653.21	22654.21	22657.21	22668.21
 Steppe	22642.22	22653.22	22654.22	22657.22	22668.22
 Black forest	22642.23	22653.23	22654.23	22657.23	22668.23
Marbled stoneware					
 White Calacatta	22642.51	22653.51	22654.51	22657.51	22668.51
 Coffee brown	22642.52	22653.52	22654.52	22657.52	22668.52
 Black Marquina	22642.53	22653.53	22654.53	22657.53	22668.53
Wood					
 Oak	22642.31	22653.31	22654.31	22657.31	22668.31
 American walnut	22642.32	22653.32	22654.32	22657.32	22668.32
 Eucalyptus	22642.33	22653.33	22654.33	22657.33	22668.33

Eikon Chrome cover plates: guideline

	2-module		2-central-module		3-module		4-module	
								
	Classic	Round	Classic	Round	Classic	Round	Classic	Round
Total look (Varnished metal)								
Artic white	20642.B01	20672.B01	20652.B01	20682.B01	20653.B01	20683.B01	20654.B01	20684.B01
Matt silver	20642.N13	20672.N13	20652.N13	20682.N13	20653.N13	20683.N13	20654.N13	20684.N13
Matt anthracite	20642.15	20672.15	20652.15	20682.15	20653.15	20683.15	20654.15	20684.15
Reflex total look (Technopolymer)								
Reflex graphite	20642.40	-	20652.40	-	20653.40	-	20654.40	-
Reflex ice (with white frame)	20642.B41	-	20652.B41	-	20653.B41	-	20654.B41	-
Reflex anthracite	20642.42	-	20652.42	-	20653.42	-	20654.42	-
Bright (Varnished metal)								
Artic white	20642.C01	20672.C01	20652.C01	20682.C01	20653.C01	20683.C01	20654.C01	20684.C01
Antique white	20642.C02	20672.C02	20652.C02	20682.C02	20653.C02	20683.C02	20654.C02	20684.C02
Metallic champagne	20642.C07	-	20652.C07	-	20653.C07	-	20654.C07	-
Metallic titanium	20642.C08	-	20652.C08	-	20653.C08	-	20654.C08	-
Metallic silver	20642.C10	-	20652.C10	-	20653.C10	-	20654.C10	-
Metallic anthracite	20642.C12	-	20652.C12	-	20653.C12	-	20654.C12	-
Matt silver	20642.C13	20672.C13	20652.C13	20682.C13	20653.C13	20683.C13	20654.C13	20684.C13
Matt titanium	20642.C14	20672.C14	20652.C14	20682.C14	20653.C14	20683.C14	20654.C14	20684.C14
Matt anthracite	20642.C15	20672.C15	20652.C15	20682.C15	20653.C15	20683.C15	20654.C15	20684.C15
Refined (Refined metal)								
Satin gold (with gold frame)	-	20672.G21	-	20682.G21	-	20683.G21	-	20684.G21
Satin nickel	20642.C22	-	20652.C22	-	20653.C22	-	20654.C22	-
Polished gold (with gold frame)	20642.G24	-	20652.G24	-	20653.G24	-	20654.G24	-
InOX (Stainless steel)								
Brushed inox	20642.C91	-	20652.C91	-	20653.C91	-	20654.C91	-

Eikon Chrome cover plates: guideline

7-module		8-module		14-module	21-module	Panel mounting 1-module		Panel mounting 2-module	
									
Classic	Round	Classic	Round	Classic	Classic	Classic	Round	Classic	Round
20657.B01	20687.B01	20668.B01	20698.B01	20660.01*	20661.01*	20666.B01	20696.B01	20667.B01	20697.B01
20657.N13	20687.N13	20668.N13	20698.N13	20660.13*	20661.13*	20666.N13	20696.N13	20667.N13	20697.N13
20657.15	20687.15	20668.15	20698.15	20660.15*	20661.15*	20666.15	20696.15	20667.15	20697.15
20657.40	-	20668.40	-	-	-	-	-	-	-
20657.B41	-	20668.B41	-	-	-	-	-	-	-
20657.42	-	20668.42	-	-	-	-	-	-	-
20657.C01	20687.C01	20668.C01	20698.C01	-	-	-	-	-	-
20657.C02	20687.C02	20668.C02	20698.C02	-	-	-	-	-	-
20657.C07	-	20668.C07	-	-	-	-	-	-	-
20657.C08	-	20668.C08	-	-	-	-	-	-	-
20657.C10	-	20668.C10	-	-	-	-	-	-	-
20657.C12	-	20668.C12	-	-	-	-	-	-	-
20657.C13	20687.C13	20668.C13	20698.C13	-	-	-	-	-	-
20657.C14	20687.C14	20668.C14	20698.C14	-	-	-	-	-	-
20657.C15	20687.C15	20668.C15	20698.C15	-	-	-	-	-	-
-	20687.G21	-	20698.G21	-	-	-	-	-	-
20657.C22	-	20668.C22	-	-	-	-	-	-	-
20657.G24	-	20668.G24	-	-	-	-	-	-	-
20657.C91	-	20668.C91	-	-	-	-	-	-	-

Eikon Tactil and **Eikon Evo** cover plates for British standard: guideline

	2-module	3-module/monobloc	5-module/monobloc	
	Eikon Tactil	Eikon Evo	Eikon Evo	Eikon Tactil
				
Primari (Anodized aluminium)				
	Brilliant Aluminium	-	21642.01	21648.01
	Next Grey	-	21642.02	21648.02
	Lava Grey	-	21642.03	21648.03
	Neutral Bronze	-	21642.04	21648.04
	Dark Bronze	-	21642.05	21648.05
Esclusivi (Refined aluminium)				
	Black Sapphire	-	21642.06	21648.06
	Silver	-	21642.07.01	21648.07.01
	Titanium	-	21642.08	21648.08
	Polished gold	-	21642.09	21648.09
	Total polished gold (with gold frame)	-	21642.G09	21648.G09
	Satin gold	-	21642.10	21648.10
	Total satin gold (with gold frame)	-	21642.G10	21648.G10
Scolpiti (Carved stone)				
	Carrara white	-	21642.51	21648.51
	Natural split slate	-	21642.52	21648.52
	Grey quartzite	■ 21662.53	21642.53	21648.53
Naturali (Solid wood)				
	Italian walnut	■ 21662.31	21642.31	21648.31
	White Oak	■ 21662.32	21642.32	21648.32
	Wengé	■ 21662.33	21642.33	21648.33
				■ 21667.31
				21649.31
				■ 21667.32
				21649.32
				■ 21667.33
				21649.33

Eikon Tactil and Eikon Evo cover plates for British standard: guideline

	2-module	3-module/monobloc	5-module/monobloc	
	Eikon Tactil	Eikon Evo	Eikon Evo	Eikon Tactil
				
Luminosi (Bevelled crystal)				
White diamond	21662.70	21642.70	21648.70	21667.70
Aqua	21662.71	21642.71	21648.71	21667.71
Silver ice	-	21642.72	21648.72	-
Pearl grey	21662.73	21642.73	21648.73	21667.73
Opal brown	-	21642.74	21648.74	-
Bronze mirror	-	21642.75	21648.75	-
Black Diamond	21662.76	21642.76	21648.76	21667.76
Raffinati (Natural leather)				
Cream	■ 21662.21	21642.21	21648.21	■ 21667.21
Tobacco	■ 21662.22	21642.22	21648.22	■ 21667.22
Speciali (Corian®)				
Glacier ice	■ 21662.41	21642.41	21648.41	■ 21667.41
Essenziali (total aluminium and crystal)				
Total White	-	21642.17	21648.17	-
Total Black	-	21642.18	21648.18	-
Total White Diamond	-	21642.87	21648.87	-
Total Black Diamond	-	21642.88	21648.88	-

Eikon Exé cover plates for British standard: guideline

	2-module	3-module/monobloc	5-module/monobloc
			
Total look metals			
Matt white	22642.01	22648.01	22649.01
Next	22642.02	22648.02	22649.02
Anthracite grey	22642.03	22648.03	22649.03
Brushed metals			
Brushed nickel	22642.11	22648.11	22649.11
Brushed dark bronze	22642.12	22648.12	22649.12
Brushed black	22642.13	22648.13	22649.13
Polished metals			
Nickel	22642.81	22648.81	22649.81
Gold	22642.82	22648.82	22649.82
Black chrome	22642.83	22648.83	22649.83
Exclusive metals			
Antique gold	22642.85	22648.85	22649.85
Brushed copper	22642.86	22648.86	22649.86
Antique brushed bronze	22642.87	22648.87	22649.87
Glass			
Milky white	22642.71	22648.71	22649.71
Canvas white	22642.72	22648.72	22649.72
Satin black	22642.73	22648.73	22649.73
Mirrors			
Ice silver	22642.75	22648.75	22649.75
Shiny bronze	22642.76	22648.76	22649.76
Opal brown	22642.77	22648.77	22649.77
Leather			
Savannah	22642.21	22648.21	22649.21
Steppe	22642.22	22648.22	22649.22
Black forest	22642.23	22648.23	22649.23
Marbled stoneware			
White Calacatta	22642.51	22648.51	22649.51
Coffee brown	22642.52	22648.52	22649.52
Black Marquina	22642.53	22648.53	22649.53
Wood			
Oak	22642.31	22648.31	22649.31
American walnut	22642.32	22648.32	22649.32
Eucalyptus	22642.33	22648.33	22649.33




Eikon Exé - The collections cover plates for British standard: guideline

Flat cover plates	2-module			3-module
	1-gang	2-gang	4-gang	6-gang
Total look metals				
Matt white	22682.1.01	22682.2.01	22692.01	22695.01
Anthracite grey	22682.1.03	22682.2.03	22692.03	22695.03
Brushed metals				
Brushed nickel	22682.1.11	22682.2.11	22692.11	22695.11
Brushed dark bronze	22682.1.12	22682.2.12	22692.12	22695.12
Polished metals				
Gold	22682.1.82	22682.2.82	22692.82	22695.82

Eikon Chrome cover plates for British standard: guideline

	2-module		3-module/monobloc		5-module/monobloc
Classic					
Artic white	20647.B01	20677.B01	20648.B01	20678.B01	20649.B01
Matt silver	20647.N13	20677.N13	20648.N13	20678.N13	20649.N13
Matt anthracite	20647.15	20677.15	20648.15	20678.15	20649.15
Round					
Total Look (Varnished metal)					
Artic white	20647.C01	20677.C01	20648.C01	20678.C01	20649.C01
Antique white	20647.C02	20677.C02	20648.C02	20678.C02	20649.C02
Metallic champagne	20647.C07	-	20648.C07	-	20649.C07
Metallic titanium	20647.C08	-	20648.C08	-	20649.C08
Metallic silver	20647.C10	-	20648.C10	-	20649.C10
Metallic anthracite	20647.C12	-	20648.C12	-	20649.C12
Matt silver	20647.C13	20677.C13	20648.C13	20678.C13	20649.C13
Matt titanium	20647.C14	20677.C14	20648.C14	20678.C14	20649.C14
Matt anthracite	20647.C15	20677.C15	20648.C15	20678.C15	20649.C15
Bright (Varnished metal)					
Satin gold (with gold frame)	-	20677.G21	-	20678.G21	-
Satin nickel	20647.C22	-	20648.C22	-	20649.C22
Polished gold (with gold frame)	20647.G24	-	20648.G24	-	20649.G24
Refined (Refined metal)					
Brushed inox	20647.C91	-	20648.C91	-	20649.C91
INOX (Stainless steel)					





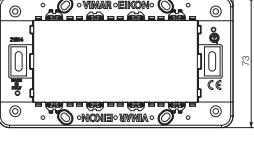
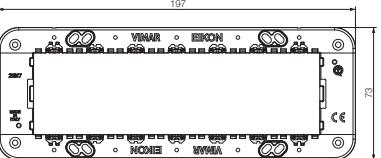
Eikon Tactil and Eikon Evo: standard types of mounting

Module	Box	Frame	Cover plate*
2 for ø 60 mm or 56x56 mm mounting box	Flush mounting  V71001 For masonry GW 650 °C, light blue V71001.AU GW 960 °C, black  V71701 For hollow walls, for frame without claws, GW 850 °C, light blue	 21602 2-module, with claws  21603 2-module, without screws	Eikon Tactil  21662... 2-module Dimensions: 95,4x95,4 mm
3	Flush mounting  V71303 For masonry GW 650 °C, light blue V71303.AU GW 960 °C, black  V71703 For hollow walls GW 850 °C, light blue	 21613 3-module, with screws 	Eikon Tactil  21663... 3-module Dimensions: 118x106 mm
4	Flush mounting  V71304 For masonry GW 650 °C, light blue V71304.AU GW 960 °C, black  V71704 For hollow walls GW 850 °C, light blue	 21614 4-module, with screws 	Eikon Tactil  21664... 4-module Dimensions: 140,5x106 mm
7	Flush mounting  V71306 For masonry GW 650 °C, light blue V71306.AU GW 960 °C, black  V71706 For hollow walls GW 850 °C, light blue	 21617 7-module, with screws 	Eikon Evo  21654... 4-module Dimensions: 140,5x106 mm
			Eikon Evo  21657... 7-module Dimensions: 208x106 mm




Eikon Evo: standard types of mounting

Module	Box	Touch screen/frame	Cover plate*
8 (4+4)	<p>Flush mounting</p> <p></p> <p>V71318 For masonry GW 650 °C, light blue</p> <p>V71718 For hollow walls GW 850 °C, light blue</p>	<p></p> <p>01420 4,3" IP touch screen, grey 01420.B: white 01420.BN: neutral</p> <p></p> <p>21848.1... Colour touch screen, 4,3" Full Flat Well-contact Plus, with built-in 8-module mounting frame</p> <p></p> <p>21618 4+4-module, with screws</p>	<p></p> <p>21668... 8-module (4+4) Dimensions: 155,2x155,2 mm</p> <p></p> <p>Cover plate rotated at a 90° angle</p>
8 (4+4)	<p>Semi-flush mounting</p> <p></p> <p>V71318 For masonry GW 650 °C, light blue</p> <p>V71718 For hollow walls GW 850 °C, light blue</p>	<p></p> <p>01425 10" IP touch screen</p>	<p></p> <p>21665... For 10" IP touch screen Dimensions: 345x250 mm Material and finishing availability: 21665.11: Aluminium 21665.70: White diamond 21665.76: Black Diamond</p>

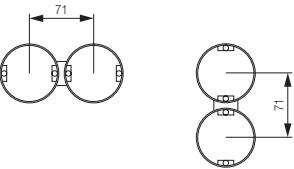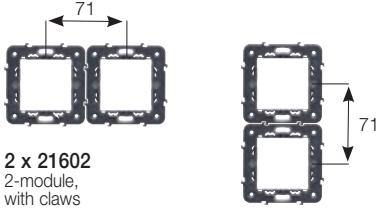
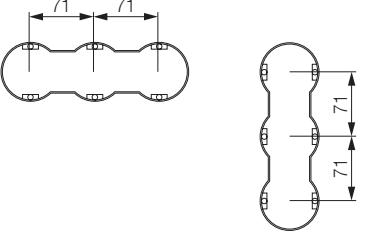
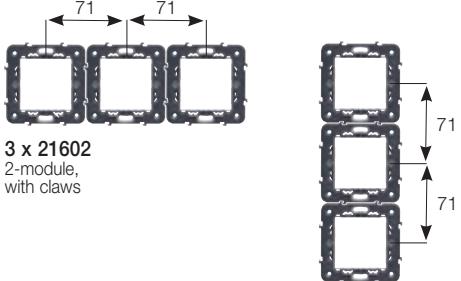
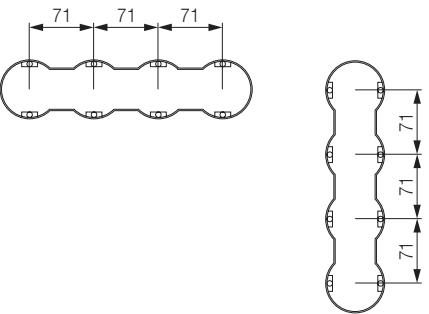
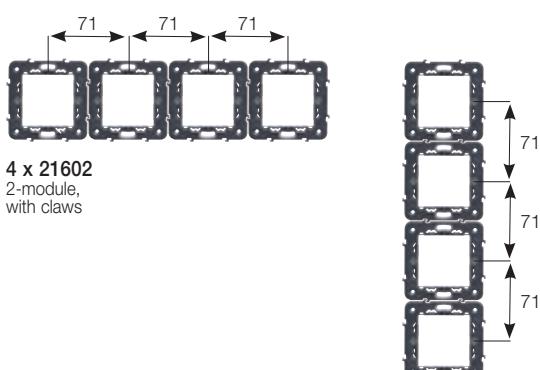
Eikon Evo: 71 mm between centres installation

Module	Box	Frame
2+2 71 mm between centres		 2 x 21602 2-module, with claws
2+2+2 71 mm between centres		 3 x 21602 2-module, with claws
2+2+2+2 71 mm between centres		 4 x 21602 2-module, with claws

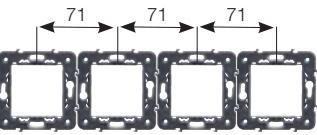
Eikon Evo: 71 mm between centres installation

	Cover plate*
 2 x 21603 2-module, without screws	 21643... 4-module (2+2), for horizontal and vertical installation. Dimensions: 166,4x95,4 mm
 3 x 21603 2-module, without screws	 21644... 6-module (2+2+2), for horizontal and vertical installation. Dimensions: 237,4x95,4 mm
 4 x 21603 2-module, without screws	 21669... 8-module (2+2+2+2), for horizontal and vertical installation. Dimensions: 308,4x95,4 mm





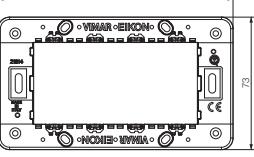
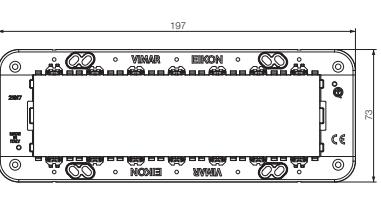
Eikon Exé: standard types of mounting

Module	Box	Frame	Cover plate*
2 for ø 60 mm or 56x56 mm mounting box	<p>Flush mounting</p>   <p>V71001 For masonry GW 650 °C, light blue V71001.AU GW 960 °C, black</p> <p>V71701 For hollow walls, for frame without claws, GW 850 °C, light blue</p>	<p>21602 2-module, with claws</p>   <p>21603 2-module, without screws</p>  	 <p>22642... 2-module Dimensions: 90x90 mm</p>
3	<p>Flush mounting</p>   <p>V71303 For masonry GW 650 °C, light blue V71303.AU GW 960 °C, black</p> <p>V71703 For hollow walls GW 850 °C, light blue</p>	<p>21613 3-module, with screws</p>  	 <p>22653... 3-module Dimensions: 122x90 mm</p>
4	<p>Flush mounting</p>   <p>V71304 For masonry GW 650 °C, light blue V71304.AU GW 960 °C, black</p> <p>V71704 For hollow walls GW 850 °C, light blue</p>	<p>21614 4-module, with screws</p>  	 <p>22654... 4-module Dimensions: 144,5x90 mm</p>
7	<p>Flush mounting</p>   <p>V71306 For masonry GW 650 °C, light blue V71306.AU GW 960 °C, black</p> <p>V71706 For hollow walls GW 850 °C, light blue</p>	<p>21617 7-module, with screws</p>  	 <p>22657... 7-module Dimensions: 212x90 mm</p>







Eikon Exé: standard types of mounting

Module	Box	Touch screen/frame	Cover plate*
8 (4+4)	<p>Flush mounting</p>  <p>V71318 For masonry GW 650 °C, light blue</p> <p>V71718 For hollow walls GW 850 °C, light blue</p>	 <p>01420 4,3" IP touch screen, grey 01420.B: white 01420.BN: neutral</p>  <p>21848.1... Colour touch screen, 4,3" Full Flat Well-contact Plus, with built-in 8-module mounting frame</p>  <p>21618 4+4-module, with screws</p>	 <p>22668... 8-module (4+4) Dimensions:156,1x156,1 mm</p>  <p>Cover plate rotated at a 90° angle</p>

Eikon Exé - Vintage: standard types of mounting




Module	Box	Frame	Cover plate*
1 and 2 for ø 60 mm or 56x56 mm mounting box	<p>Flush mounting</p> <p>V71001 For masonry GW 650 °C, light blue V71001.AU GW 960 °C, black</p> 	<p>21600.0 1-module, without screws</p>   <p>21601.0 1-module, with claws</p>  	 <p>22672.1... 2 modules, 1-gang. Dimensions: 90x90 mm</p>
	<p>V71701 For hollow walls, for frame without claws, GW 850 °C, light blue</p> <p>V71701.AU GW 960 °C, black</p>	<p>21602 2-module, with claws</p>   <p>21603 2-module, without screws</p>  	 <p>22672.2... 2 modules, 2-gang. Dimensions: 90x90 mm</p>
3	<p>Flush mounting</p> <p>V71303 For masonry GW 650 °C, light blue V71303.AU GW 960 °C, black</p> 	<p>21613 3-module, with screws</p>  	 <p>22673.1... 3 modules, 1-gang. Dimensions: 122x90 mm</p>  <p>22673.2... 3 modules, 2-gang. Dimensions: 122x90 mm</p>  <p>22673.3... 3 modules, 3-gang. Dimensions: 122x90 mm</p>

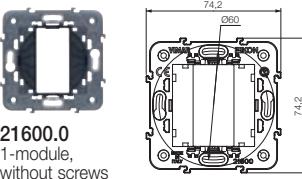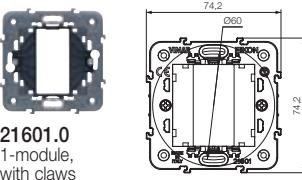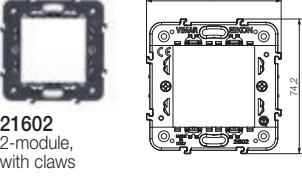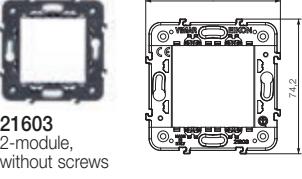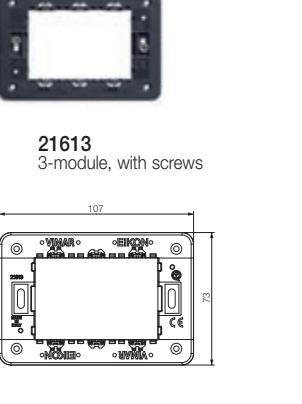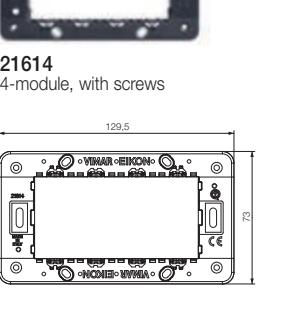Eikon Exé - Flat: standard types of mounting

Module	Box	Frame	Cover plate*
1 and 2 for ø 60 mm or 56x56 mm mounting box	Flush mounting   V71001 For masonry GW 650 °C, light blue V71001.AU GW 960 °C, black V71701 For hollow walls, for frame without claws, GW 850 °C, light blue	21600.0 1-module, without screws  21601.0 1-module, with claws 	 22682.1... 2 modules for 1 switch. Dimensions: 90x90 mm
3	Flush mounting   V71303 For masonry GW 650 °C, light blue V71303.AU GW 960 °C, black V71703 For hollow walls GW 850 °C, light blue	21602 2-module, with claws  21603 2-module, without screws 	 22682.2... 2 modules for 2 switches. Dimensions: 90x90 mm  22692... 2 modules for 4 home automation/KNX devices. Dimensions: 90x90 mm
4	Flush mounting   V71304 For masonry GW 650 °C, light blue V71304.AU GW 960 °C, black V71704 For hollow walls GW 850 °C, light blue	21613 3-module, with screws  21614 4-module, with screws 	 22683.1... 3 modules for 1 switch. Dimensions: 122x90 mm  22683.2... 3 modules for 2 switches. Dimensions: 122x90 mm  22683.3... 3 modules for 3 switches. Dimensions: 122x90 mm  22693... 3 modules for 6 home automation/KNX devices. Dimensions: 122x90 mm



* it is necessary to use 21041 blank module when 21613 mounting frame is installed with 22683.1 and 22683.2 cover plates.

Eikon Exé: flush mounting for plasterboard

Module	Box	Frame	Cover plate*
1 and 2	 <p>V71791 ø 60 mm mounting box (GW 960 °C) with plaster frame for plasterboard and hollow walls</p>	 21600.0 1-module, without screws  21601.0 1-module, with claws  	Eikon Exé Flat  22682.1... 2 modules for 1 switch. Dimensions: 90x90 mm
3	 <p>V71793 3-module mounting box (GW 960 °C) with plaster frame for plasterboard and hollow walls</p>	 21613 3-module, with screws 	Eikon Exé Flat  22682.2... 2 modules for 2 switches. Dimensions: 90x90 mm Eikon Exé  22642... 2-module. Dimensions: 90x90 mm Eikon Exé Flat  22682.3... 3 modules for 2 switches. Dimensions: 90x90 mm Eikon Exé  22653... 3-module. Dimensions: 122x90 mm

¹ It is necessary to use 21041 blank module when 21613 mounting frame is installed with 22683.1 and 22683.2 cover plates.





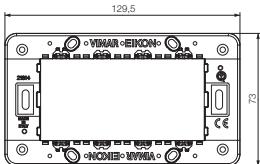
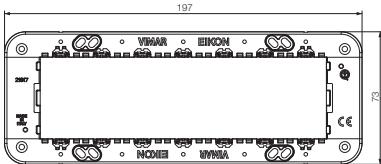
Eikon Exé: flush mounting for plasterboard

Module	Box	Frame	Cover plate*
4	 <p>V71794 4-module mounting box (GW 960 °C) with plaster frame for plasterboard and hollow walls</p>	 <p>21614 4-module, with screws</p> 	 <p>Eikon Exé Flat</p> <p>22694... 4 modules for 4 home automation/KNX devices. Dimensions: 144,5x90 mm</p>
7	 <p>V71796 7-module mounting box (GW 960 °C) with plaster frame for plasterboard and hollow walls</p>	 <p>21617 7-module, with screws</p> 	 <p>Eikon Exé</p> <p>22657... 7-module. Dimensions: 212x90 mm</p>



Eikon Chrome: standard types of mounting

Module	Box	Flush mounting	Surface mounting			
2 for Ø 60 mm mounting box		 V71001 For masonry GW 650 °C, light blue V71001.AU GW 960 °C, black	 V71701 For hollow walls, for frame without claws, GW 850 °C, light blue	 09971.A 43,5 deep, RAL 9001 ivory 09971.01: white		
2-central and 3		 V71303 For masonry GW 650 °C, light blue V71303.AU GW 960 °C, black	 V71703 For hollow walls GW 850 °C, light blue	 09983 35-45 mm deep, grey 09983.01: white	 09975.A 43,5 mm deep, RAL 9001 ivory 09975.01: white	 09976.04 30 mm deep, Idea white 09976.14: Idea grey
4		 V71304 For masonry GW 650 °C, light blue V71304.AU GW 960 °C, black	 V71704 For hollow walls GW 850 °C, light blue		 20784 4-module table mounting box, grey 20784.B As above, white	
7		 V71306 For masonry GW 650 °C, light blue V71306.AU GW 960 °C, black	 V71706 For hollow walls GW 850 °C, light blue		 20787 7-module table mounting box, grey 20787.B As above, white Δ 20787.N As above, Next	

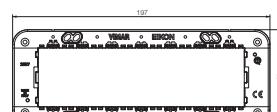Eikon Chrome: standard types of mounting



Frame	Cover plate*
 21602 2-module, with claws 	Classic  20642... 2-module Dimensions: 85x85 mm
 21603 2-module, without screws 	Round  20672... 2-module Dimensions: 80x80 mm
 21612 2-central-module, with screws 	Classic  20652... 2-central-module Dimensions: 120x85 mm
 21613 3-module, with screws 	Round  20682... 2-central-module Dimensions: 120x80 mm
 21614 4-module, with screws 	Classic  20653... 3-module Dimensions: 120x85 mm
	Round  20683... 3-module Dimensions: 120x80 mm
 21617 7-module, with screws 	Classic  20654... 4-module Dimensions: 142x85 mm
	Round  20684... 4-module Dimensions: 142x80 mm
	Classic  20657... 7-module Dimensions: 206x85 mm
	Round  20687... 7-module Dimensions: 210x80 mm

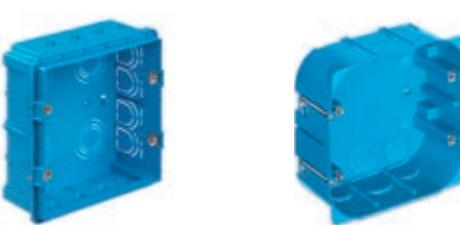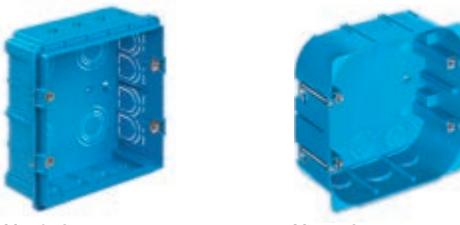Eikon Chrome: standard types of mounting




Module	Box
8 (4+4)	<p>Flush mounting</p>  <p>V71318 For masonry GW 650 °C, light blue</p> <p>V71718 For hollow walls GW 850 °C, light blue</p>
	<p>Flush mounting</p>  <p>V71318 For masonry GW 650 °C, light blue</p> <p>V71718 For hollow walls GW 850 °C, light blue</p>
	<p>Table mounting</p>  <p>20788 8-module with Classic and Round frame, grey 20788.B white Δ 20788.N Next Dimensions: 141x151,9x135 mm</p>
1	<p>Panel mounting</p>  <p>16776.AU GW 960 °C</p>
2	 <p>16776.AU x 2 GW 960 °C</p>
14 (7+7)	<p>Flush mounting</p>  <p>V71320 For masonry GW 650 °C, light blue</p> <p>V71720 For hollow walls GW 850 °C, light blue</p> <p>Surface mounting</p>  <p>09920.01, bianco</p>
21 (7+7+7)	<p>Flush mounting</p>  <p>V71321 For masonry GW 650 °C, light blue</p> <p>Surface mounting</p>  <p>09921.01, White</p>

Δ Available until stocks last

Eikon Chrome: standard types of mounting

Touch screen/frame	Cover plate*	
 01420 4,3" IP touch screen	Classic	 20668... 8-module Dimensions: 142x156 mm
	Round	 20698... 8-module Dimensions: 142x151 mm
 21848.1... Colour touch screen, 4,3" Full Flat Well-contact Plus, with built-in 8-module mounting frame	Classic	 20668... 8-module Dimensions: 142x156 mm
	Round	 20698... 8-module Dimensions: 142x151 mm
 21618 4+4-module, with screws	Classic	 20668... 8-module Dimensions: 142x156 mm
	Round	 20698... 8-module Dimensions: 142x151 mm
 20626 1-module, with screws	Classic	 20666... 1-module Dimensions: 40x80 mm
	Round	 20696... 2-module Dimensions: 40x80 mm
 20627 2-module, with screws	Classic	 20667... 2-module Dimensions: 40x137 mm
	Round	 20697... 2-module Dimensions: 40x137 mm
 20620 14-module (7+7), with screws	Classic	 20660... 14-module (7+7), technopolymer, with signalling tags. Dimensions: 207x153 mm
 20621 21-module (7+7+7), with screws	Classic	 20661... 21-module (7+7+7), technopolymer, with signalling tags. Dimensions: 207x223 mm

Eikon Tactil and Eikon Evo: British standard mounting

Module	Box	Frame	Cover plate*
1 and 2	Flush mounting	 <p>20606¹ 1-module, with screws M 3,5, grey</p> <p>20606.B¹ 1-module, with screws M 3,5, white</p> <p>20606.N¹ 1-module, with screws M 3,5, Next</p>	 <p>21642... 2-module Dimensions: 95,4x95,4 mm</p>
	 1-gang mounting box Fixing centres: 60,3 mm	 <p>20607¹ 2-module, with screws M 3,5</p> 	 <p>Eikon Tactil</p> <p>Eikon Evo</p> <p>21662... 2-module Dimensions: 95,4x95,4 mm</p> <p>21642... 2-module Dimensions: 95,4x95,4 mm</p>
3 and monobloc	Flush mounting	 <p>20608¹ 3-module, with screws M 3,5</p>  <p>20017 Example of monobloc device</p>  <p>20215.L Example of monobloc device</p>	 <p>21648... 3-module Dimensions: 95,4x95,4 mm</p>
5 and monobloc	Flush mounting	 <p>20609¹ 5-module, with screws M 3,5</p>   <p>20222.L Example of monobloc device in horizontal mounting</p>  <p>20291 Example of monobloc device in vertical mounting</p>	 <p>Eikon Tactil</p> <p>21667... 5-module Dimensions: 163x95,4 mm</p>  <p>Eikon Evo</p> <p>21649... 5-module Dimensions: 163x95,4 mm</p>

* Cover plates range, page 118

¹ Items conform to BS 5733





Eikon Exé - Flat: British standard mounting

Module	Box	Frame	Cover plate*
1 and 2	Flush mounting  1-gang mounting box Fixing centres: 60,3 mm	 20606.0² 1-module, with screws M 3,5	 22682.1... 2 modules for 1 switch. Dimensions: 90x90 mm
		 20607² 2-module, with screws M 3,5	 22682.2... 2 modules for 2 switches. Dimensions: 90x90 mm
3	Flush mounting  1-gang mounting box Fixing centres: 60,3 mm	 20608² 3-module, with screws M 3,5	 22695... 3 modules for 6 home automation/KNX devices. Dimensions: 90x90 mm




Eikon Exé - Vintage: British standard mounting

Module	Box	Frame	Cover plate*
1 and 2	Flush mounting  1-gang mounting box Fixing centres: 60,3 mm	 20606.0² 1-module, with screws M 3,5	 22672.1... 2 modules for 1 switch. Dimensions: 90x90 mm
		 20607² 2-module, with screws M 3,5	 22672.2... 2 modules for 2 switches. Dimensions: 90x90 mm

Eikon Exé: British standard mounting

Module	Box	Frame	Cover plate*		
1 and 2	Flush mounting  1-gang mounting box Fixing centres: 60,3 mm	 20606¹ 1-module, with screws M 3,5, grey	 20606.B¹ 1-module, with screws M 3,5, white	 20606.N¹ 1-module, with screws M 3,5, Next	 22642... 2-module Dimensions: 90x90 mm
3 and monobloc	Flush mounting  1-gang mounting box Fixing centres: 60,3 mm	 20608¹ 3-module, with screws M 3,5	 20017 Example of monobloc device	 20215.L Example of monobloc device	 22648... 3-module Dimensions: 90x90 mm
5 and monobloc	Flush mounting  2-gang mounting box Fixing centres: 120,6 mm	 20609¹ 5-module, with screws M 3,5	 20222.L Example of monobloc device in horizontal mounting	 20291 Example of monobloc device in vertical mounting	 22649... 5-module Dimensions: 159,3x90 mm

Eikon Chrome: British standard mounting

Module	Box	Frame	Cover plate*
1 and 2	Flush mounting  1-gang mounting box Fixing centres: 60,3 mm	 20606 ¹ 1-module, with screws M 3,5, grey  20606.B ¹ 1-module, with screws M 3,5, white  20606.N ¹ 1-module, with screws M 3,5, Next	Classic  20647 ¹ ... 2-module Dimensions: 95x95x9 mm
		 20607 ¹ 2-module, with screws M 3,5 	Round  20677 ¹ ... 2-module Dimensions: 95x95x9 mm
3 and monobloc	Flush mounting  1-gang mounting box Fixing centres: 60,3 mm	 20608 ¹ 3-module, with screws M 3,5 	Classic  20648 ¹ ... Cover plate for horizontal and vertical installation. Dimensions: 95x95x9 mm Cover plate for monobloc device mounting, only.
		 20215.L Example of monobloc device  20017.L Example of monobloc device	Round  20678 ¹ ... Cover plate for horizontal and vertical installation. Dimensions: 95x95x9 mm Cover plate for monobloc device mounting, only.
5 and monobloc	Flush mounting  2-gang mounting box Fixing centres: 120,6 mm	 20609 ¹ 5-module, with screws M 3,5 	Classic  20649 ¹ ... 5-module For horizontal and vertical installation. Dimensions: 155x95x9 mm
		 20222.L Example of monobloc device in horizontal mounting  20291 Example of monobloc device in vertical mounting	Round  20679 ¹ ... 5-module For horizontal and vertical installation. Dimensions: 155x95x9 mm

Wiring devices.

Catalogue

Arké.

Catalogue section

Control devices	162
Power and signal socket outlets	175
Signalling, protection and detection	187
Comfort and climate	190
Stand alone and hotel solutions	191
Cover plates range	194
Installation types	208

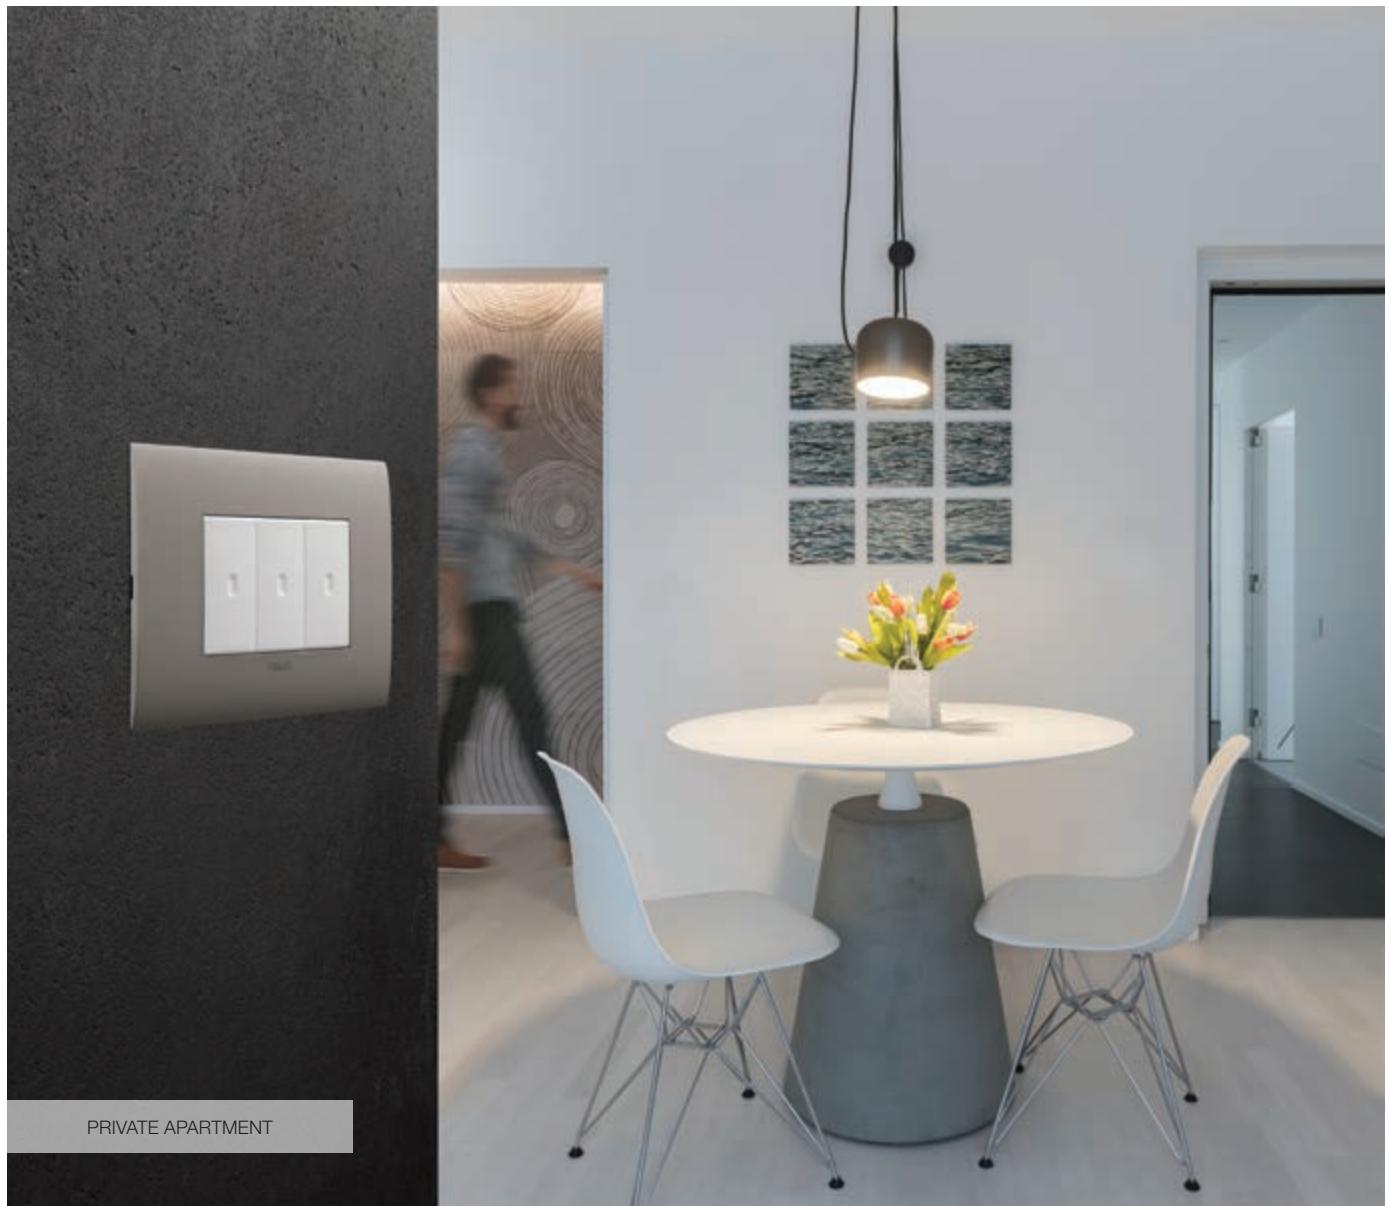
Arké

Enjoy your living
spaces





RELAX AREA, ACTIVE LUXURY RESORT




PRIVATE APARTMENT

Arké fit

Light-weight on any wall. Connected in any home.

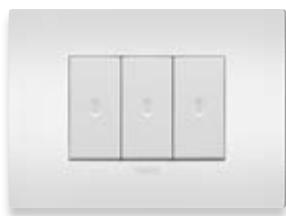Made of metal, Arké fit cover plate can be teamed with buttons and controls in anthracite grey, white and Metal, the new shade featuring a warm metallic effect, to offer an eye-catching total look effect.



just
4.9 mm



PRIVATE HOUSE

Arké Classic and Round

Two designs. The best for your projects.

Large sized surfaces that underline shapes and materials.

Arké Classic. Rational shape, linear profile and clean corners.

Arké Round. Sinuous surface, slightly curved with soft corners. Convex buttons. A pleasant feeling ergonomic shape, only slightly perceptible to the eye, accompanies the controls.

Buttons and controls in anthracite grey, white and Metal.





Arké fit. Beautiful and light-weight on any wall

Arké fit is the **new Vimar cover plate**, the slimmest in the Arké range: sophisticated, with unique finishes. It is light-weight on any wall, providing the perfect flush-fit result, and it blends in seamlessly with any architectural context or interior design style. Furthermore, it guarantees **the perfect styling result, even on plasterboard walls**.

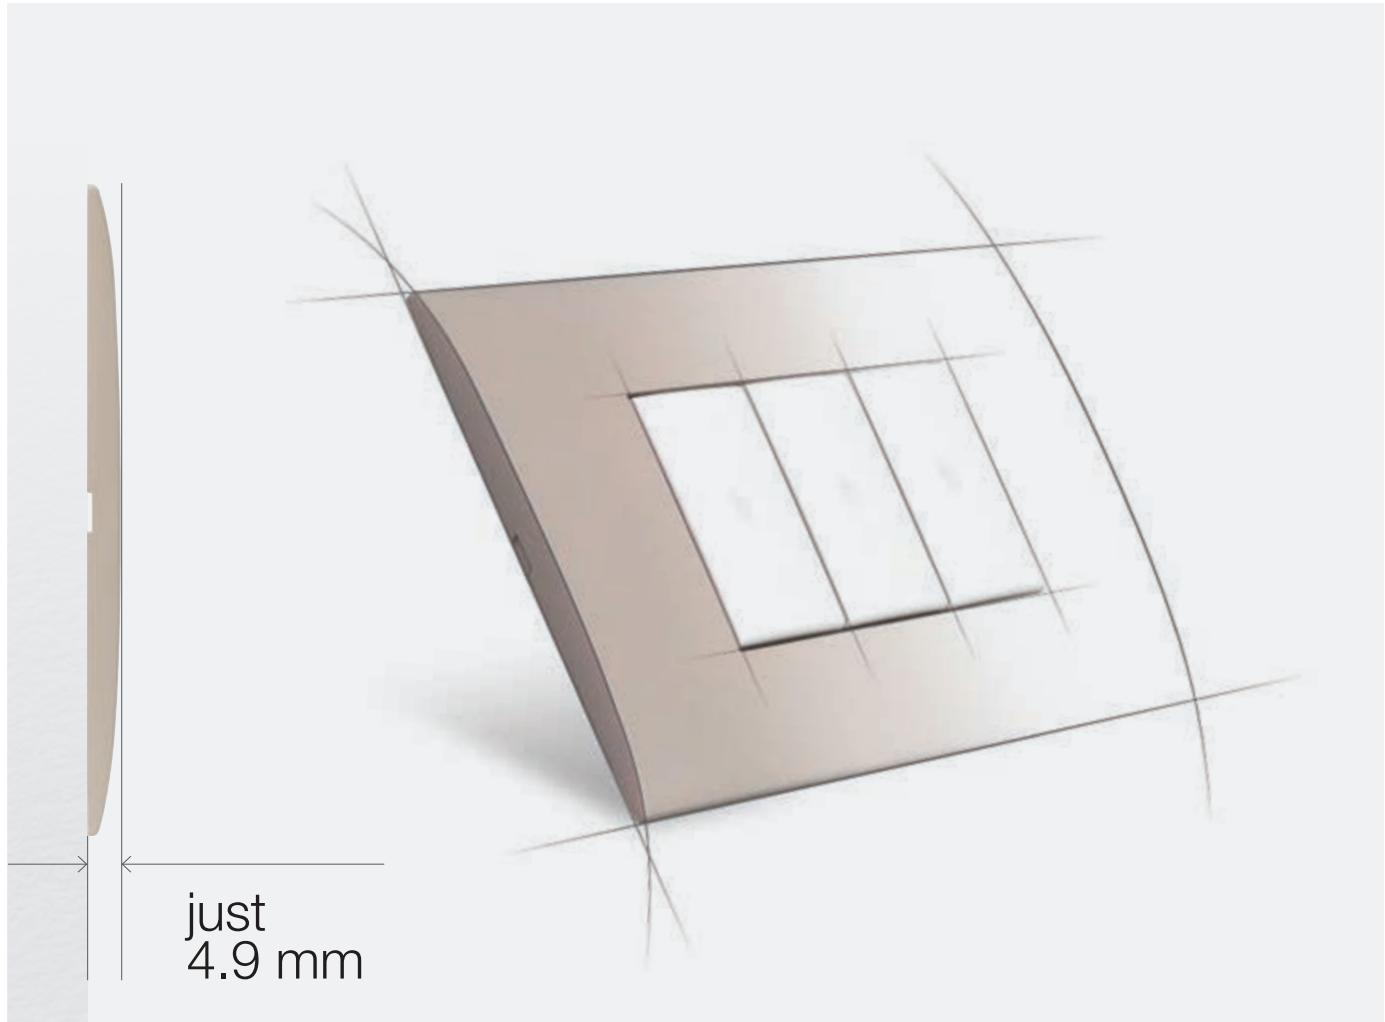
The traditional painted metal and faced metal finishes have been supplemented with three new colours for the cover plate: Lipari Sands, Dove Grey and Siena Soil. Pastel colours and soft hues, for simple and gentle combinations. A generous 11 different finishes, capable of accommodating the latest style trends.

Pastello



Total Look





> Slim profile

Protruding by just 4.9 millimetres, the slimmest in the entire wiring series range. A light-weight, imperceptible profile, which with its slim shape enhances the value of its surroundings, accommodating the style of any building.

> Structural solidity

Thanks to the rigidity of the dedicated mounting frame, the solidity of surface mounting both cover plate and device - even on plasterboard walls - is unrivalled, always guaranteeing perfect button alignment. In keeping with the superior quality of Vimar products.

> Even on plasterboard

The special structure of the mounting frame affords an attractive flush-fit effect, where the cover plate blends in seamlessly with the wall. In installations on plasterboard, **it also covers the protrusion of the mounting box perfectly.**

Metal-Elite



Metal-Color





Arké Classic and Round. Materials and finishes to express all-Italian creativity beautifully.

Metal

Metal-Elite and Metal-Color:

Painted zamak and PVD-coated zamak: two metal types, ample strength, numerous shades and different textures chosen to highlight the contemporary style of this product range.



Aluminium

Alu-Tech: natural, lava, dark bronze: there are three different shades available.



Solid Wood

Cover plates with a strong material quality, conveyed through the warm, harmonious appeal of solid wood.





Materials selected to stand the test of time, innovative production processes and typically Italian attention to finishes. A perfect combination that offers a product of outstanding style designed to enhance every space with its most unique expression.

Reflex-Plus

Eclectic and versatile technopolymer. A shiny material with a special frosted look in various hues: from the full-bodied caramel and ultramarine to the lighter shades of sage and smoky grey.



Technopolymer

Color-Tech: a technopolymer with a special varnished treatment that affords a charming metal effect, enhancing the high-tech style of matt silver and the modernity of Metal.



Tecno-Basic: a simple, hard-wearing material which Arké has paired with stylish and conservative colours, such as black and white, for pairings that do not follow fashion fads.



Easy solutions to live better. Smart comfort

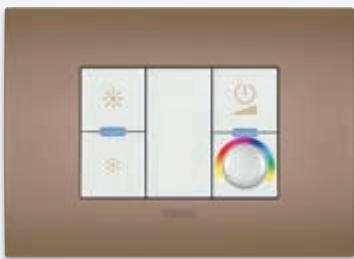
USB SOCKET OUTLETS

The type A connector has now been supplemented with the type C one, the new technological standard used to power and charge latest-generation devices. Ideal in hotel rooms and offices.



UNIVERSAL AND RGB DIMMERS

Used to adjust the brightness of LED and low consumption (CFL) lights and play with the colours of RGB lamps. This way, savings and the right atmosphere can shine as one.



INFRARED 1-WAY SWITCH

Without touching the switches with your hands, the 1-way switch infrared motion sensor turns the lights on and off only when necessary. Or as someone passes or at dusk. Ideal for optimising electricity consumption levels and to avoid contact with the lighting device.



WI-FI ACCESS POINT

The network signal reaches every corner of the house. The ideal solution to extend your Internet connection throughout your home, even to areas that are not reached by the Wi-Fi signal or where the signal is weaker, providing coverage to all rooms.



TOUCH TIMER-THERMOSTAT

For optimum climate control and programmable from smartphone via By-clima app. With RGB backlighting for colour coordinated controls. Temperature and humidity probes are also available.



Easy solutions

to live better.
Easy safety and security

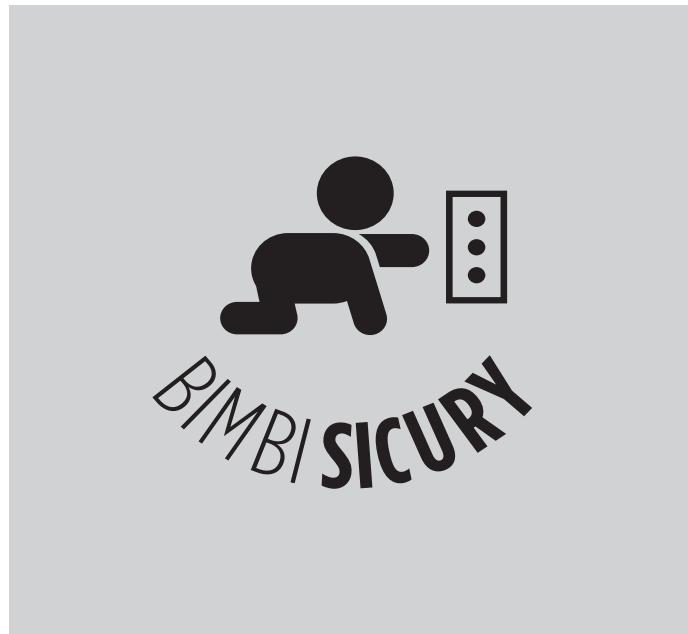
SOCKET OUTLETS WITH SICURY PROTECTIVE SHUTTER

The SICURY safety shutter, which Vimar patented in 1968, is an automatic mechanism that closes the holes in the socket outlet when the plug is removed; this stops foreign bodies from being inserted, preventing accidental contact with live parts.




INTERLOCKED SOCKET

Cuts off the power supply in the event of an overvoltage, to keep people safe.



EMERGENCY LAMP AND GAS DETECTOR

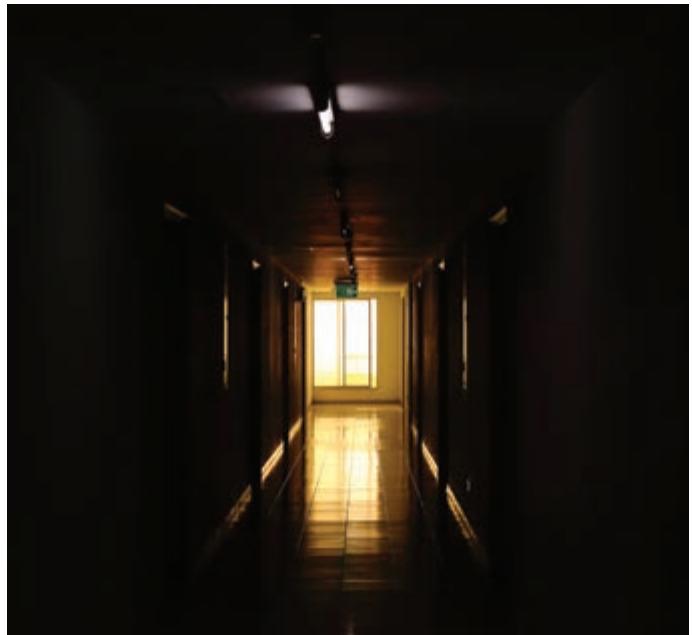The emergency lamp comes on in the event of a blackout to guide you safely in the dark. With a technology hyper-sensitive to gas leaks, the detector reports them, blocks them and describes the fault.



SIGNAL AND MULTIMEDIA SOCKET OUTLETS

Arké enables the connection of electronic devices and the transmission of digital signals through copper or fibre-optic data sockets, telephone socket outlets, USB data ports and RCA and TV-RD-SAT sockets; they all guarantee fast, safe connections to a high quality standard.



SAFE TOUCH. CHOOSE ANTBACTERICAL SOLUTIONS

In hospitals, working and public places, hygiene is vital. Technopolymer cover plates and buttons are treated with silver ions to prevent the spread of germs.



ANTIBACTERIAL

REDUCTION OF
90%
OF GROWTH
OF **BACTERIA**



Stand-alone and expandable solutions with a vast range of devices

RADIOFREQUENCY CONTROLS

With no power supply or batteries, they can be mounted on any surface, even wood or glass. No masonry work, there is no need for flush mounting boxes. Ideal for renovations, redevelopments and updates, or any installations which have regulatory or architectural constraints.



LISTEN TO MUSIC

The Bluetooth wireless technology receiver incorporated in the 4+4 W amplifier exploits the Bluetooth technology on your smartphone to connect quickly to your home stereo system or, on holiday, the system in your hotel room.



BY-ALARM BURGLAR ALARM SYSTEM

By-alarm can be integrated both with the **By-me Plus home automation system** which, through an IP interface, guarantees a secure and protected connection, locally and remotely and with the wide range of products of **Elvox CCTV**. The versatility and scalability, combined with high technology and simplicity of use, makes them suitable for small apartments as well as shopping malls and business centres, up to large industrial companies.



QUID FOR LIGHTING CONTROL

An innovative magnetic relay that connects the silence of traditional electronic devices to the reliability of the electromechanical ones. It introduces new evolved functions, like the opportunity of centralizing the lighting out with just a gesture and with only one cable. Furthermore, the presence of a pilot light reveals if the lighting is active in any other connected point.



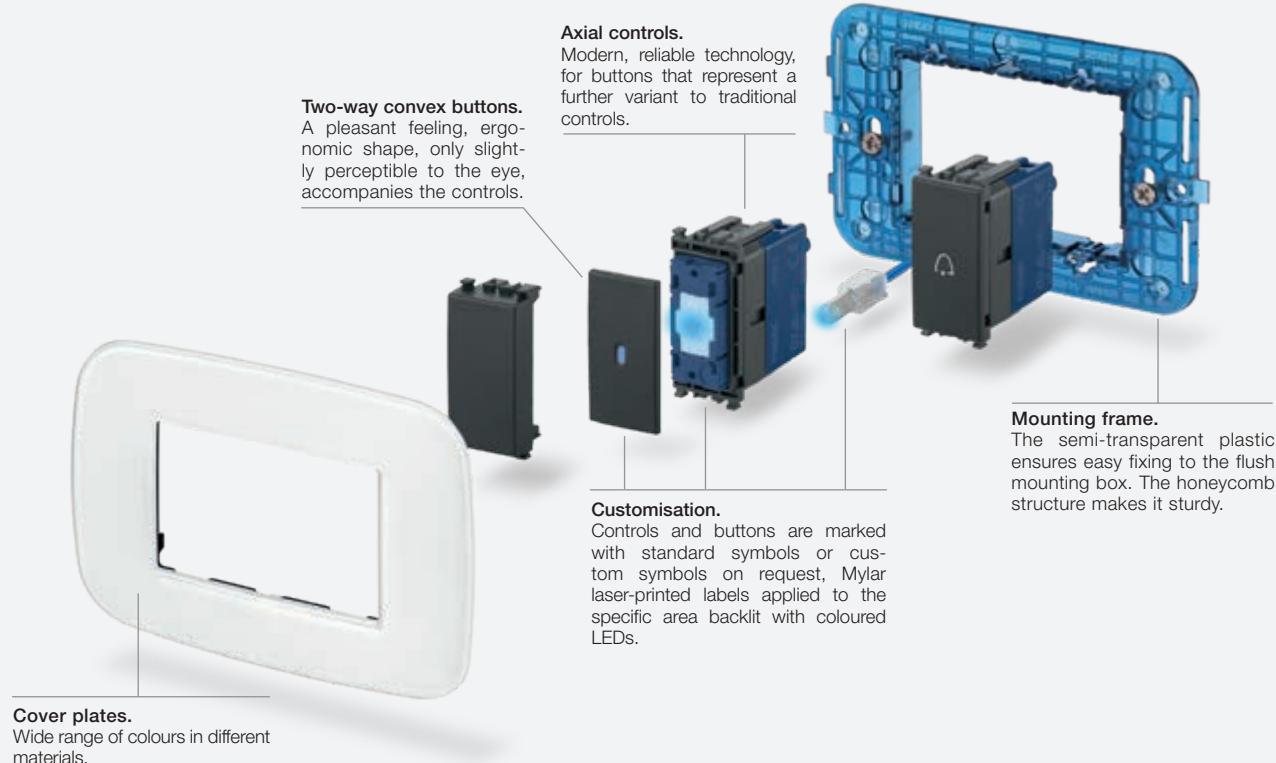
QUID FOR ROLLER SHUTTERS CONTROL

This new switch offers the possibility of automating curtains or roller shutters and enabling group control, disconnecting the load at the end of the activation and memorizing the favourite position and the user can recall it whenever he wants. A performing solution created in the name of functionality and comfort.









Mounting features for other standards

Axial controls



Traditional controls

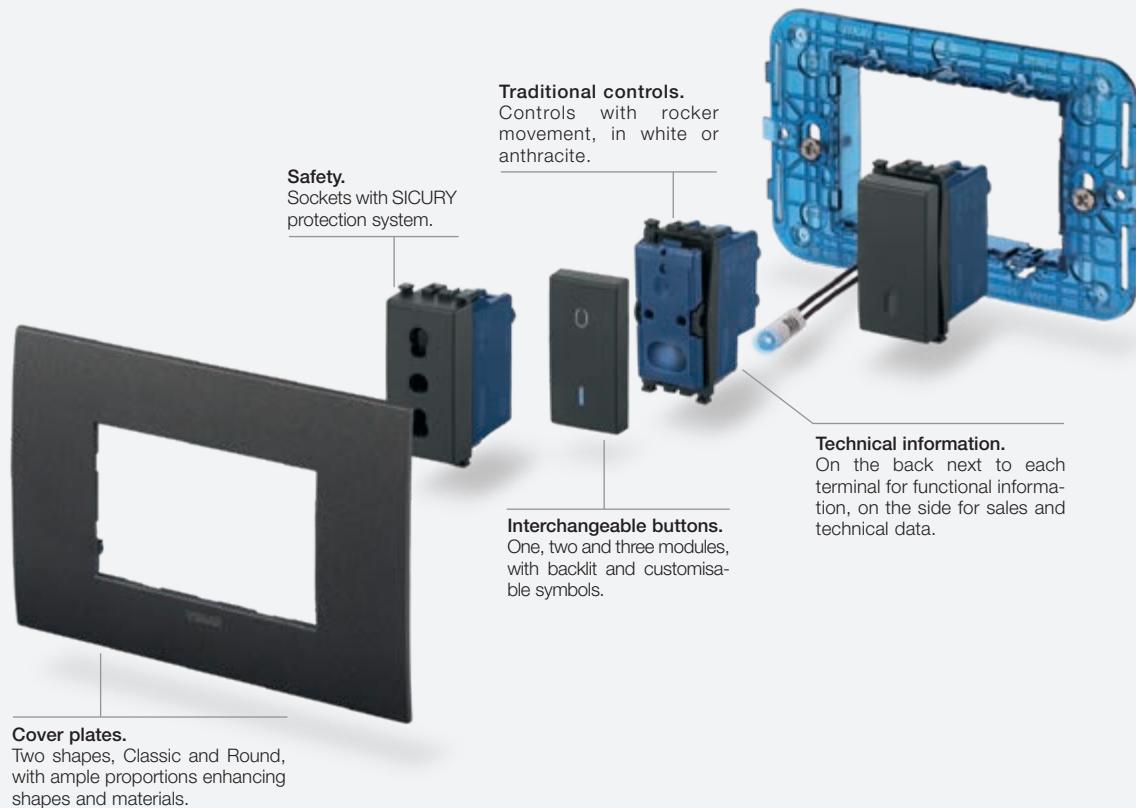

Composition	Box	Frame	Device	Cover plate
 panel mounting	 panel mounting	 with screws	 1-module	 from 1 to 2 modules Classic or Round*
 from 1 to 2 modules	 flush mounting	 2-module with/without screws or with claws	 2-module  2 x 1-module	 from 1 to 2 modules Classic or Round*
 2 central modules		 with screws	 2 x 1-module  2-module	 2-central-module Classic or Round*
 from 3 to 7 modules	 flush mounting	 with screws	 1- and 2-module  3 x 1-module  3-module	 From 3 to 7 modules Classic or Round*
 8-module	 flush mounting	 with screws	 video door entry unit  4 x 1-module	 8-module Classic or Round*
 table mounting	 table box	 with screws	 1 x 2-module and 2 x 1-module	 4 and 7 modules Classic or Round*

* For other combinations, see the installation types from page 208

Mounting features for British standard

Modular devices mounting

**Cover plates**

Wide range of colours and combinations.

Technical information

On the back next to each terminal for functional information, on the side for sales and technical data.

Interchangeable buttons

One or two modules, with backlit symbols and customizable.

**Customisation**

Controllers and keys are marked with standard symbols or custom symbols on request, laser engraved in the specific area backlit with coloured LEDs.

**Lowered frame**

Stainless steel mounting frame with earth terminal, with lugs for an easy and fast installation of the devices from the front.

Available also for 1 module with built-in blank module.

Monobloc device (with built-in mounting frame)

**Cover plates**

For vertical and horizontal mounting.

Socket outlet

With SICURY patented system to prevent accidental contacts.

**Signalling LED**

Signalling of power supply, with integrated signalling unit, perfectly visible by day and night.


Monobloc device
Built-in mounting frame.**Fixing lugs**

Possibility of horizontal and vertical mounting of device.

Matching possibility

Joining possibility with minimum 25 mm of distance between boxes


Due to the graphic layout, the product photos are not represented with equivalent proportions.














Composition	Box	Frame	Device	Cover plate
	 1-gang mounting box Fixing centres: 60,3 mm		1-gang switch, 1 module	1 module*
	 1-gang mounting box Fixing centres: 60,3 mm		2 x 1-gang switches, 1 module 1-gang switch, 2 modules	2 modules*
	 1-gang mounting box Fixing centres: 60,3 mm		Socket outlet monobloc device ON/OFF unit monobloc device 1 x 2-module + 1 x 1-module	monobloc horizontal mounting* monobloc vertical mounting* 3 modules*
	 2-gang mounting box Fixing centres: 120,6 mm		2-gang switched socket outlets monobloc device 2 x 2-module + 1 x 1-module (blank module)	5 modules*

* For other combinations, see the installation types from page 212

Mounting features

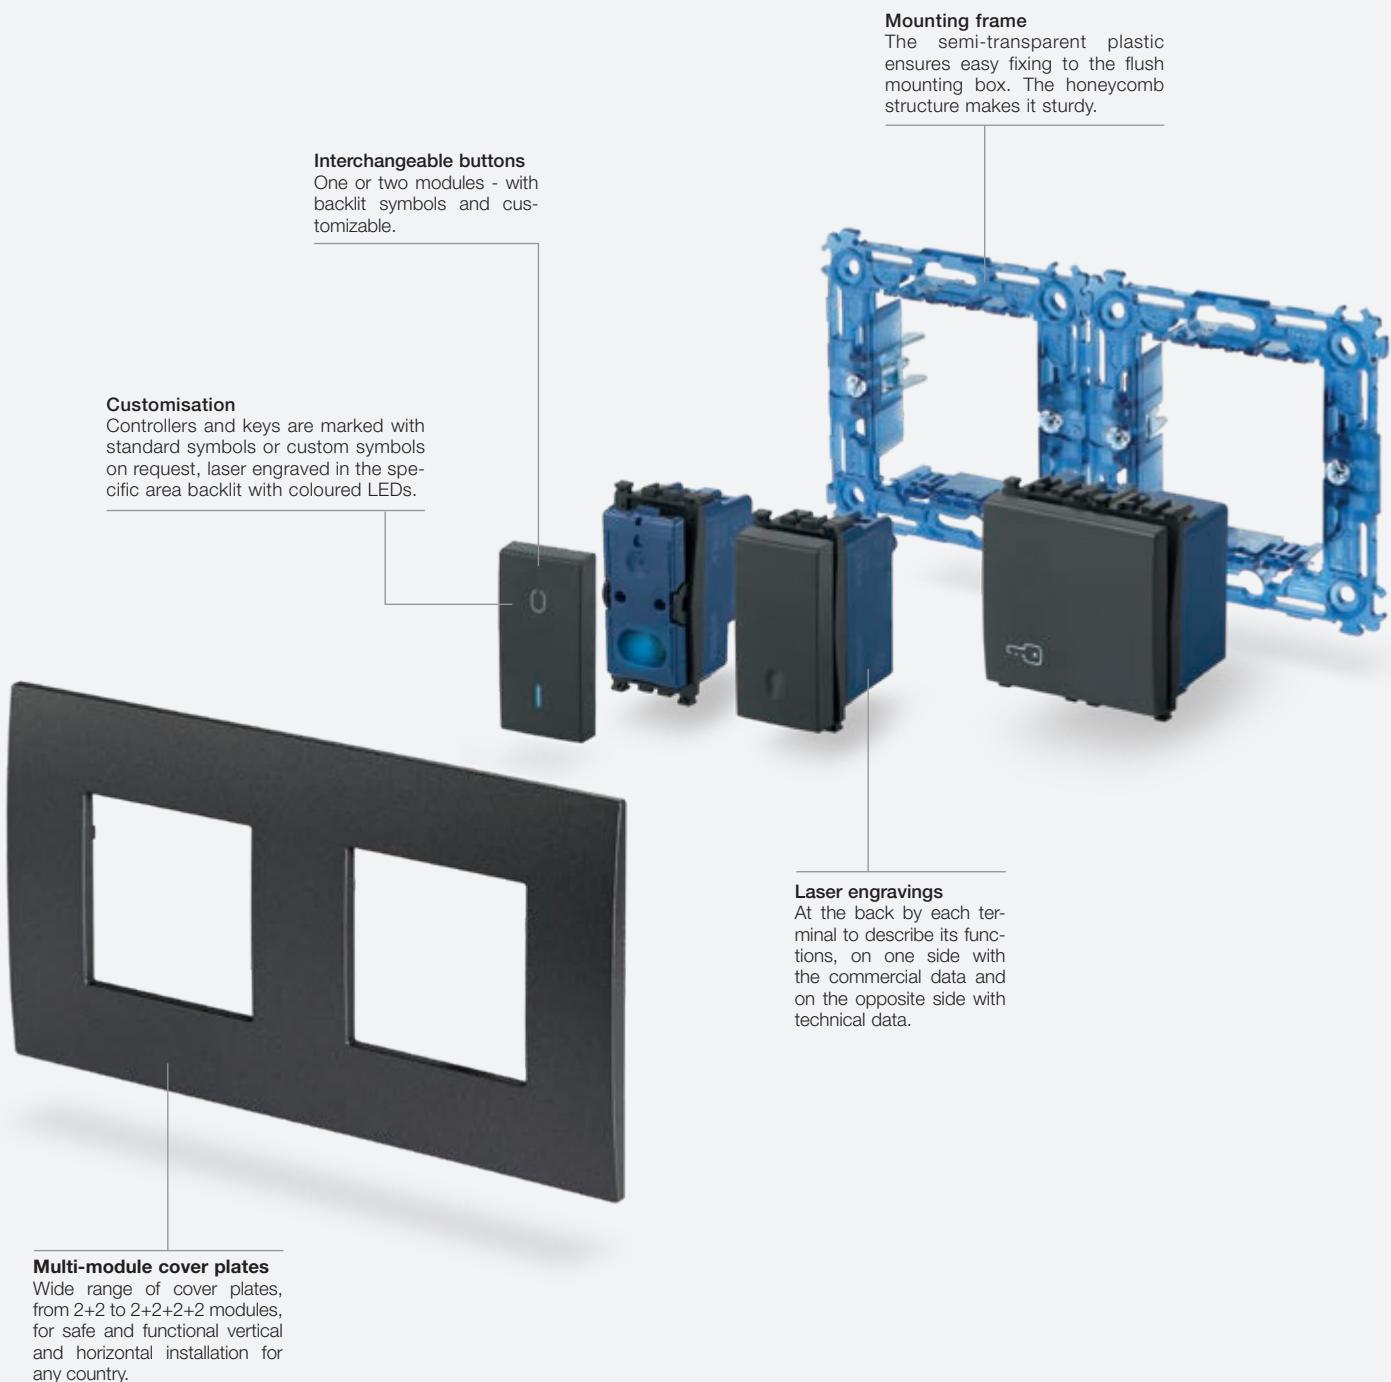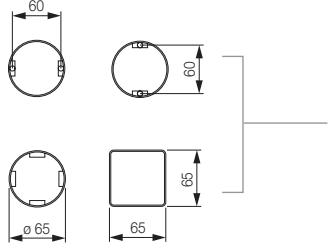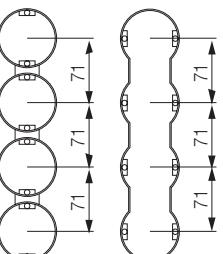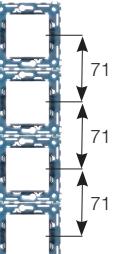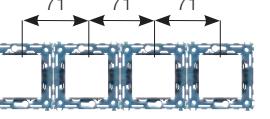Installation with 71 mm between centres
(German and French standards)



Composition	Box	Frame	Device	Cover plate		
 2 modules, ø 60 and 65 mm mounting box			1-gang switch, 2 modules			
 2+2 modules, 71 mm between centres	 	 	2 x 2 modules in vertical		2 x 2 modules in horizontal	
 2+2+2 modules, 71 mm between centres	  	 	3 x 2 modules in vertical		3 x 2 modules in horizontal	
 2+2+2+2 modules, 71 mm between centres	  	 	4 x 2 modules in vertical		4 x 2 modules in horizontal	

Devices

Grey	White	Metal
Blank modules and cable outlets		
 19041 Blank module. Depth: 10 mm	 19044 Cable outlet. Depth: 16,3 mm	 19041.M Blank module. Depth: 10 mm
 19042 Blank module - 2 modules. Depth: 11 mm	 19042.B Blank module - 2 modules. Depth: 11 mm	 19042.M Blank module - 2 modules. Depth: 11 mm
 19046² Cable outlet + 2P+E 20 A terminal bar. Depth: 22,1 mm	 19047² 2P+E 45 A 1-gang cable outlet supplied with cover. Depth: 20 mm	 19046.M² Cable outlet + 2P+E 20 A terminal bar. Depth: 22,1 mm
 19049.L³ 13 A, 1-gang, switched and fused connection unit. Depth: 20,4 mm	 19049.L.B³ 13 A, 1-gang, switched and fused connection unit. Depth: 20,4 mm	 19049.L.M³ 13 A, 1-gang, switched and fused connection unit. Depth: 20,4 mm
1P 1-way switches 250 V~ (lightable[®])		
 19001 16 AX. Depth: 25 mm	 19001.2 16 AX - 2 modules. Depth: 25 mm	 19001.M 16 AX. Depth: 25 mm
 19002 20 AX. Depth: 25 mm	 19002.2 20 AX - 2 modules. Depth: 25 mm	 19002.M 20 AX. Depth: 25 mm
 19001.B 16 AX. Depth: 25 mm	 19001.2.B 16 AX - 2 modules. Depth: 25 mm	 19001.2.M 16 AX - 2 modules. Depth: 25 mm
 19002.B 20 AX. Depth: 25 mm	 19002.2.B 20 AX - 2 modules. Depth: 25 mm	 19002.2.M 20 AX - 2 modules. Depth: 25 mm

* Not to be used in European Countries

▲ New article

Δ Available until stocks last

Devices

Grey	White	Metal
1P 1-way switches 250 V~, screwless terminals (lightable°)		
 ▲19000.FX 10 AX. Depth: 29,7 mm	 ▲19000.FX.B 10 AX. Depth: 29,7 mm	 ▲19000.FX.M 10 AX. Depth: 29,7 mm
 ▲19000.FX.2 10 AX - 2 modules. Depth: 29,7 mm	 ▲19000.FX.2.B 10 AX - 2 modules. Depth: 29,7 mm	 ▲19000.FX.2.M 10 AX - 2 modules. Depth: 29,7 mm
Axial 1P 1-way switches 250 V~ (lightable°)		
 19101 16 AX. Depth: 35,5 mm	 19101.2 16 AX - 2 modules. Depth: 35,5 mm	 19101.M 16 AX. Depth: 35,5 mm
	 19101.B 16 AX. Depth: 35,5 mm	 19101.2.M 16 AX - 2 modules. Depth: 35,5 mm
2P 1-way switches 250 V~ (lightable°)		
 19015 16 AX. Depth: 25 mm	 19015.2 16 AX - 2 modules. Depth: 25 mm	 19015.M 16 AX. Depth: 25 mm
	 19015.B 16 AX. Depth: 25 mm	 19015.2.M 16 AX - 2 modules. Depth: 25 mm
2P 1-way switches 250 V~, screwless terminals (lightable°)		
 △ 19015.FX 16 AX. Depth: 26,7 mm	 △ 19015.FX.B 16 AX. Depth: 26,7 mm	 △ 19015.FX.M 16 AX. Depth: 26,7 mm
 △ 19015.FX.2 16 AX - 2 modules. Depth: 26,7 mm	 △ 19015.FX.2.B 16 AX - 2 modules. Depth: 26,7 mm	 △ 19015.FX.2.M 16 AX - 2 modules. Depth: 26,7 mm
2P 1-way switches 250 V~ (lightable°)		
 19016 20 AX. Depth: 26 mm	 19016.2 20 AX, ON/OFF - 2 modules. Depth: 26 mm	 19016.M 20 AX. Depth: 26 mm
	 19016.B 20 AX. Depth: 26 mm	 19016.2.M 20 AX, ON/OFF - 2 modules. Depth: 26 mm
 19016.WH 20 AX, Water/Heater. Depth: 26 mm	 19016.2.WH 20 AX, Water/Heater - 2 modules. Depth: 26 mm	 19016.WH.M 20 AX, Water/Heater. Depth: 26 mm
	 19016.B.WH 20 AX, Water/Heater. Depth: 26 mm	 19016.2.WH.M 20 AX, Water/Heater - 2 modules. Depth: 26 mm

Devices

Grey	White	Metal
2P 1-way switches 250 V~ (lightable°)		
 19017 32 A, 1-gang, ON/OFF. Depth: 22,5 mm	 19017.WH 32 A, 1-gang, Water/Heater. Depth: 22,5 mm	 19017.B 32 A, 1-gang, ON/OFF. Depth: 22,5 mm
 19017.M 32 A, 1-gang, ON/OFF. Depth: 22,5 mm	 19017.WH.M 32 A, 1-gang, Water/Heater. Depth: 22,5 mm	
 19018 45 A, 1-gang, ON/OFF. Depth: 22,5 mm	 19018.CK 45 A, 1-gang, cooker unit. Depth: 22,5 mm	 19018.B 45 A, 1-gang, ON/OFF. Depth: 22,5 mm
 19018.M 45 A, 1-gang, ON/OFF. Depth: 22,5 mm	 19018.CK.M 45 A, 1-gang, cooker unit. Depth: 22,5 mm	
 19019 45 A, 1-gang, ON/OFF for 2-gang boxes. Depth: 22,5 mm	 19019.CK 45 A, 1-gang, cooker unit for 2-gang boxes. Depth: 22,5 mm	 19019.B 45 A, 1-gang, ON/OFF for 2-gang boxes. Depth: 22,5 mm
 19019.M 45 A, 1-gang, ON/OFF for 2-gang boxes. Depth: 22,5 mm	 19019.CK.M 45 A, 1-gang, cooker unit for 2-gang boxes. Depth: 22,5 mm	
1P 2-way switches 250 V~ (lightable°)		
 19005 16 AX. Depth: 25 mm	 19005.2 16 AX - 2 modules. Depth: 25 mm	 19005.B 16 AX. Depth: 25 mm
 19005.M 16 AX. Depth: 25 mm	 19005.2.B 16 AX - 2 modules. Depth: 25 mm	 19005.2.M 16 AX - 2 modules. Depth: 25 mm
 19006 20 AX. Depth: 26 mm	 19006.2 20 AX, - 2 modules. Depth: 26 mm	 19006.B 20 AX. Depth: 26 mm
 19006.M 20 AX. Depth: 26 mm	 19006.2.B 20 AX, - 2 modules. Depth: 26 mm	 19006.2.M 20 AX, - 2 modules. Depth: 26 mm
1P 2-way switches 250 V~, screwless terminals (lightable°)		
 ▲19004.FX 10 AX. Depth: 29,7 mm	 ▲19004.FX.2 10 AX - 2 modules. Depth: 29,7 mm	 ▲19004.FX.B 10 AX. Depth: 29,7 mm
 ▲19004.FX.M 10 AX. Depth: 29,7 mm	 ▲19004.FX.2.M 10 AX - 2 modules. Depth: 29,7 mm	

* Not to be used in European Countries

▲ New article

Δ Available until stocks last

Devices

Grey	White	Metal			
Axial 1P 2-way switches 250 V~ (lightable°)					
					
19105 16 AX. Depth: 34,5 mm	19105.2 16 AX - 2 modules. Depth: 34,5 mm	19105.B 16 AX. Depth: 34,5 mm	19105.2.B 16 AX - 2 modules. Depth: 34,5 mm	19105.M 16 AX. Depth: 34,5 mm	19105.2.M 16 AX - 2 modules. Depth: 34,5 mm

View Wireless connected 2-way switches

**19592.0**

Mechanism, 100-240 V 50/60 Hz output relay for 500 W incandescent lamps, 100 W LED lamps, 250 VA electronic transformers, 60 W fluorescent lamps, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, 1 input for actuator push button recall a scenario. To complete with 1-, 2- or 3-module buttons. Depth: 36,5 mm



certified product

1P reversing switches 250 V~ (lightable°)

					
19013 16 AX. Depth: 25 mm	19013.2 16 AX - 2 modules. Depth: 25 mm	19013.B 16 AX. Depth: 25 mm	19013.2.B 16 AX - 2 modules. Depth: 25 mm	19013.M 16 AX. Depth: 25 mm	19013.2.M 16 AX - 2 modules. Depth: 25 mm

1P reversing switches 250 V~, screwless terminals (lightable°)

					
▲19009.FX 10 AX. Depth: 27,7 mm	▲19009.FX.2 10 AX - 2 modules. Depth: 27,7 mm	▲19009.FX.B 10 AX. Depth: 27,7 mm	▲19009.FX.2.B 10 AX - 2 modules. Depth: 27,7 mm	▲19009.FX.M 10 AX. Depth: 27,7 mm	▲19009.FX.2.M 10 AX - 2 modules. Depth: 27,7 mm

Axial 1P reversing switches 250 V~ (lightable°)




					
19113 16 AX. Depth: 34,5 mm	19113.2 16 AX - 2 modules. Depth: 34,5 mm	19113.B 16 AX. Depth: 34,5 mm	19113.2.B 16 AX - 2 modules. Depth: 34,5 mm	19113.M 16 AX. Depth: 34,5 mm	19113.2.M 16 AX - 2 modules. Depth: 34,5 mm

Grey	White	Metal			
1P NO 10 A push buttons 250 V~ (lightable°)					
 19008 10 A. Depth: 26 mm	 19008.2 10 A - 2 modules. Depth: 26 mm	 19008.B 10 A. Depth: 26 mm	 19008.2.B 10 A - 2 modules. Depth: 26 mm	 19008.M 10 A. Depth: 26 mm	 19008.2.M 10 A - 2 modules. Depth: 26 mm
 19008.2.C Bell symbol - 2 modules. Depth: 26 mm	 19008.2.L Light symbol - 2 modules. Depth: 26 mm	 19008.2.C.B Bell symbol - 2 modules. Depth: 26 mm	 19008.2.L.B Light symbol - 2 modules. Depth: 26 mm	 19008.2.C.M Bell symbol - 2 modules. Depth: 26 mm	 19008.2.L.M Light symbol - 2 modules. Depth: 26 mm
1P NO 10 A push buttons 250 V~, screwless terminals (lightable°)					
 19008.FX 10 A. Depth: 26,7 mm	 19008.FX.2 10 A - 2 modules. Depth: 26,7 mm	 19008.FX.B 10 A. Depth: 26,7 mm	 19008.FX.2.B 10 A - 2 modules. Depth: 26,7 mm	 19008.FX.M 10 A. Depth: 26,7 mm	 19008.FX.2.M 10 A - 2 modules. Depth: 26,7 mm
Axial 1P NO 10 A push buttons 250 V~ (lightable°)					
 19108 10 A. Depth: 35,5 mm	 19108.2 10 A - 2 modules. Depth: 35,5 mm	 19108.B 10 A. Depth: 35,5 mm	 19108.2.B 10 A - 2 modules. Depth: 35,5 mm	 19108.M 10 A. Depth: 35,5 mm	 19108.2.M 10 A - 2 modules. Depth: 35,5 mm
1P NC 10 A push button 250 V~ (lightable°)					
 19010 10 A. Depth: 25 mm	 19010.B 10 A. Depth: 25 mm	 19010.M 10 A. Depth: 25 mm			
Quid - Magnetic relay module for lighting (backfit)					
 03991 ON/OFF sequence pulse relay module, 1 input for NO push button, 1 NO 10 A 220-240 V~ 50/60 Hz relay output, for backfit	 03992 ON/OFF sequence pulse relay module, 1 input for NO push button, 1 input for reset push button, 1 NO 10 A 220-240 V~ 50/60 Hz relay output, luminous signalling of load status, for backfit	 03993 ON/OFF sequence pulse relay module, 1 input for NO push button, 2 NO 10 A 220-240 V~ 50/60 Hz sequence relay outputs, for backfit			
 00932 Pre-wired LED unit for signalling the load status, for 03992, supply voltage 220-240 V~ 50/60 Hz, 0,5 W, green					

Devices

Grey	White	Metal									
Lightable° mechanisms 250 V~ (common devices for the three versions)											
 19001.0 1P 16 AX 1-way switch. Depth: 25 mm	 19015.0 2P 16 AX 1-way switch. Depth: 25 mm	 19005.0 1P 16 AX 2-way switch. Depth: 25 mm									
 19013.0 1P 16 AX reversing switch. Depth: 25 mm	 19008.0 1P NO 10 A push button. Depth: 25 mm	 19010.0 1P NC 10 A push button. Depth: 25 mm									
 19016.0 2P 20 AX 1-way switch. Depth: 25 mm											
Lightable° mechanisms 250 V~, screwless terminals (common devices for the three versions)											
 ▲19000.FX.0 1P 10 AX 1-way switch. Depth: 29,7 mm	 ▲19015.FX.0 2P 16 AX 1-way switch. Depth: 26,7 mm	 ▲19004.FX.0 1P 10 AX 2-way switch. Depth: 29,7 mm									
 ▲19009.FX.0 1P 10 AX reversing switch. Depth: 27,7 mm	 19008.FX.0 1P NO 10 A push button. Depth: 26,7 mm										
1-module interchangeable buttons (lightable°)											
 19021 No symbol	 19026 With diffuser	 19026.DND Do Not Disturb with diffuser	 19026.PLS Please Clean with diffuser	 19021.B No symbol	 19026.B With diffuser	 19026.DND.B Do Not Disturb with diffuser	 19026.PLS.B Please Clean with diffuser	 19021.M No symbol	 19026.M With diffuser	 19026.DND.M Do Not Disturb with diffuser	 19026.PLS.M Please Clean with diffuser
 19031 Customizable	 19021.C Bell symbol	 19021.L Light symbol	 19021.P Key symbol	 19031.B Customizable	 19021.C.B Bell symbol	 19021.L.B Light symbol	 19021.P.B Key symbol	 19031.M Customizable	 19021.C.M Bell symbol	 19021.L.M Light symbol	 19021.P.M Key symbol
 19021.99 O I symbols	 19038 Smooth, non-lightable			 19021.99.B O I symbols	 19038.B Smooth, non-lightable			 19021.99.M O I symbols	 19038.M Smooth, non-lightable		
1-module interchangeable buttons for axial controls (lightable°)											
 19131 No symbol	 19131.C Bell symbol	 19131.L Light symbol	 19131.B No symbol	 19131.C.B Bell symbol	 19131.L.B Light symbol	 19131.M No symbol	 19131.C.M Bell symbol	 19131.L.M Light symbol			
 19131.P Key symbol	 19131.0 Customizable			 19131.P.B Key symbol	 19131.0.B Customizable	 19131.P.M Key symbol	 19131.0.M Customizable				

Devices

Grey	White	Metal
2-module interchangeable buttons (lightable°)		
 19022 No symbol	 19022.B No symbol	 19022.M No symbol
 19027 With diffuser	 19027.B With diffuser	 19027.M With diffuser
 19032 Customizable	 19032.B Customizable	 19032.M Customizable
 19022.C Bell symbol	 19022.C.B Bell symbol	 19022.C.M Bell symbol
 19022.L Light symbol	 19022.L.B Light symbol	 19022.L.M Light symbol
 19022.P Key symbol	 19022.P.B Key symbol	 19022.P.M Key symbol
 19022.99 O I symbols	 19022.99.B O I symbols	 19022.99.M O I symbols
 19039 Smooth, non-lightable	 19039.B Smooth, non-lightable	 19039.M Smooth, non-lightable
2-module interchangeable buttons for axial controls (lightable°)		
 19132 No symbol	 19132.B No symbol	 19132.M No symbol
 19132.C Bell symbol	 19132.C.B Bell symbol	 19132.C.M Bell symbol
 19132.L Light symbol	 19132.L.B Light symbol	 19132.L.M Light symbol
 19132.P Key symbol	 19132.P.B Key symbol	 19132.P.M Key symbol
 19132.0 Customizable	 19132.0.B Customizable	 19132.0.M Customizable
3-module interchangeable buttons (lightable°)		
 19023 No symbol	 19023.B No symbol	 19023.M No symbol
 19028 With diffuser	 19028.B With diffuser	 19028.M With diffuser
 19033 Customizable	 19033.B Customizable	 19033.M Customizable
 19023.C Bell symbol	 19023.C.B Bell symbol	 19023.C.M Bell symbol

* Not to be used in European Countries

▲ New article

Δ Available until stocks last

Devices

Grey	White	Metal
1P special switches 250 V~		
 19050 NO 10 A, with lightable nameplate - 2 modules. Depth: 26 mm	 19052 NO 10 A cord-operated. Depth: 26 mm	 19053 NC 10 A cord-operated. Depth: 26 mm
 19050.B NO 10 A, with lightable nameplate - 2 modules. Depth: 26,2 mm	 19052.B NO 10 A cord-operated. Depth: 26 mm	 19053.B NC 10 A cord-operated. Depth: 26 mm
 19050.M NO 10 A, with lightable nameplate - 2 modules. Depth: 26,2 mm	 19052.M NO 10 A cord-operated. Depth: 26 mm	 19053.M NC 10 A cord-operated. Depth: 26 mm
Additional 1P switches 250 V~		
 19056.33 10 A, NO + NC-contact, OFF symbol. Depth: 29 mm	 19056.34 10 A, NO + NC-contact, ON symbol. Depth: 29 mm	 19058 Two 10 A NO+NC independent contacts, OFF/ON symbols. Depth: 29 mm
 19056.33.B 10 A, NO + NC-contact, OFF symbol. Depth: 29 mm	 19056.34.B 10 A, NO + NC-contact, ON symbol. Depth: 29 mm	 19058.B Two 10 A NO+NC independent contacts, OFF/ON symbols. Depth: 29 mm
 19056.33.M 10 A, NO + NC-contact, OFF symbol. Depth: 29 mm	 19056.34.M 10 A, NO + NC-contact, ON symbol. Depth: 29 mm	 19058.M Two 10 A NO+NC independent contacts, OFF/ON symbols. Depth: 29 mm
1P NO 10 A push buttons 250 V~		
 19066 Two NO 10 A, independents. Depth: 29 mm	 19068 With white diffuser (for signalling unit). Depth: 28,5 mm	 19066.B Two NO 10 A, independents. Depth: 29 mm
 19066.M Two NO 10 A, independents. Depth: 29 mm	 19068.M With white diffuser (for signalling unit). Depth: 28,5 mm	
Switches 250 V~		
 19060 2P 10 AX 2-way switch, OFF-central. Depth: 33,5 mm	 19061 2P 10 A 2-way push button, OFF-central. Depth: 35 mm	 19062 2 1P NO 10 A push buttons, interlocked. Depth: 29 mm
 19060.B 2P 10 AX 2-way switch, OFF-central. Depth: 33,5 mm	 19061.B 2P 10 A 2-way push button, OFF-central. Depth: 35 mm	 19062.B 2 1P NO 10 A push buttons, interlocked. Depth: 29 mm
 19060.M 2P 10 AX 2-way switch, OFF-central. Depth: 33,5 mm	 19061.M 2P 10 A 2-way push button, OFF-central. Depth: 35 mm	 19062.M 2 1P NO 10 A push buttons, interlocked. Depth: 29 mm
Quid - Electronic 2-way switch for roller shutter		
 19196 Slat orientation, with relay outputs for cosφ 0,6 motor 2 A 220-240 V~ 50/60 Hz, position saving. Depth: 40,5 mm	 19196.B Slat orientation, with relay outputs for cosφ 0,6 motor 2 A 220-240 V~ 50/60 Hz, position saving. Depth: 40,5 mm	 19196.M Slat orientation, with relay outputs for cosφ 0,6 motor 2 A 220-240 V~ 50/60 Hz, position saving. Depth: 40,5 mm

Devices

Grey	White	Metal
Quid - Electronic relay module and control unit module for roller shutters (backfit)		
03996 Centralizable relay module, slat orientation, with relay outputs for cosφ 0,6 motor 2 A 220-240 V~ 50/60 Hz, position saving, for backfit or junction boxes installation	03997 control unit module, 2 inputs for NO push button, 6 outputs for Quid roller shutter relay module (03996), 220-240 V~ 50/60 Hz power supply, for backfit or junction boxes installation	
View Wireless connected control device for roller shutter		
19594.0 Control device for 1 roller shutter with slat orientation and change-over relay output for cosφ 0,6 motor 2 A 100-240 V~ 50/60 Hz, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, 1 input for external push button to recall a scenario, favourite position recall function. To complete with 2 1-module half-button. Depth: 37,5 mm	Bluetooth® zigbee certified product	
19755.2 2 1-module interchangeable half-button, arrows symbol	19755.2.B 2 1-module interchangeable half-button, arrows symbol	19755.2.M 2 1-module interchangeable half-button, arrows symbol
2P key-operated switches 250 V~ (add .CU to the basic code for switches with 000 unified key)		
19082 16 AX 1-way switch, key removable in "O" (OFF) position. Depth: 33 mm	19083 16 AX 1-way switch, key removable in both positions. Depth: 33 mm	19086 NO 16 A push button, key removable in "O" position. Depth: 33 mm
19082.B 16 AX 1-way switch, key removable in "O" (OFF) position. Depth: 33 mm	19083.B 16 AX 1-way switch, key removable in both positions. Depth: 33 mm	19086.B NO 16 A push button, key removable in "O" (OFF) position. Depth: 33 mm
19082.M 16 AX 1-way switch, key removable in "O" (OFF) position. Depth: 33 mm	19083.M 16 AX 1-way switch, key removable in both positions. Depth: 33 mm	19086.M NO 16 A push button, key removable in "O" position. Depth: 33 mm
Dimmers**		
19135.1 MASTER, universal. Depth: 40,5 mm	19136.1 MASTER, universal, with potentiometer. Depth: 40,5 mm	19135.1.B MASTER, universal. Depth: 40,5 mm
19135.1.120 As above, 120 V~	19135.1.120.B As above, 120 V~	19136.1.B MASTER, universal, with potentiometer. Depth: 40,5 mm
19135.1.M MASTER, universal. Depth: 40,5 mm		19136.1.M MASTER, universal, with potentiometer. Depth: 40,5 mm
19135.1.120.M As above, 120 V~		

Devices

Grey	White	Metal
Dimmers**		
 19138 RGB, with potentiometer. Depth: 40,5 mm	 19138.B RGB, with potentiometer. Depth: 40,5 mm	 19138.M RGB, with potentiometer. Depth: 40,5 mm
 19139 FADING-SHOW, with potentiometer. Depth: 40,5 mm	 19139.B FADING-SHOW, with potentiometer. Depth: 40,5 mm	 19139.M FADING-SHOW, with potentiometer. Depth: 40,5 mm
 19150 100-500 W, with potentiometer, 230 V~, Depth: 39,5 mm	 19150.B 100-500 W, with potentiometer, 230 V~, Depth: 39,5 mm	 19150.M 100-500 W, with potentiometer, 230 V~, Depth: 39,5 mm
 19153 100-500 W, push-push + potentiometer, 230 V~, Depth: 39,5 mm	 19153.B 100-500 W, push-push + potentiometer, 230 V~, Depth: 39,5 mm	 19153.M 100-500 W, push-push + potentiometer, 230 V~, Depth: 39,5 mm
 *19147 30-500 W/ 30-300 VA, potentiometer, 120 V~, Depth: 39,5 mm	 19147.B 30-500 W/ 30-300 VA, potentiometer, 120 V~, Depth: 39,5 mm	 *19147.M 30-500 W/ 30-300 VA, potentiometer, 120 V~, Depth: 39,5 mm

Dimmer - controllable loads

Type DIMMER LOADS	UNIVERSAL							
	19135.1 - 19135.1.120				19136.1			
	2-wire connection		3-wire connection		2-wire connection		3-wire connection	
LE	TE	LE	TE	LE	TE	LE	TE	
Incandescence	40 ÷ 400 W	40 ÷ 300 W	40 ÷ 400 W	40 ÷ 300 W	40 ÷ 400 W	40 ÷ 300 W	40 ÷ 400 W	40 ÷ 300 W
Compact fluorescent lamps (CFL)	10 ÷ 100 W max 5 lamps	10 ÷ 200 W max 10 lamps	10 ÷ 100 W max 5 lamps	10 ÷ 200 W max 10 lamps	10 ÷ 100 W max 5 lamps	10 ÷ 200 W max 10 lamps	10 ÷ 100 W max 5 lamps	10 ÷ 200 W max 10 lamps
LED	5 ÷ 100 W max 10 lamps	5 ÷ 200 W max 20 lamps	3 ÷ 100 W max 10 lamps	3 ÷ 200 W max 20 lamps	5 ÷ 100 W max 10 lamps	5 ÷ 200 W max 20 lamps	3 ÷ 100 W max 10 lamps	3 ÷ 200 W max 20 lamps
Electronic transformers for halogen	40 ÷ 300 VA max 3 transformers type 	40 ÷ 300 VA max 5 transformers type 	40 ÷ 300 VA max 3 transformers type 	40 ÷ 300 VA max 5 transformers type 	40 ÷ 300 VA max 3 transformers type 	40 ÷ 300 VA max 5 transformers type 	40 ÷ 300 VA max 3 transformers type 	40 ÷ 300 VA max 5 transformers type 
Supply units for LED (arts. 01874, 01875)			max 10 units	NOT useful			max 10 units	NOT useful
Step marker lamps (art. 02662)			max 10 lamps	NOT useful			max 10 lamps	NOT useful

Type DIMMER LOADS	RGB				FADING-SHOW			
	19138				19139			
	max 10 units				max 10 units			
RGB supply units (art. 01876)								
RGB lamps (art. 02663)			max 10 lamps				max 10 lamps	

Type DIMMER LOADS	STANDARD		
	19150 (with rotary potentiometer)		19153 (with push-push switch and rotary potentiometer control)
	100 - 500 W	100 - 500 W	30 - 500 W
Incandescence			
Ferromagnetic transformers			30 - 300 VA

Electronic supply unit

 01874 230 V~ 50 Hz, for controllable LED lamps, 12-24 Vdc Δ 01874.120 As above, 120 V~	 01875 230 V~ 50 Hz, for controllable LED lamps, 350/500/700 mA Δ 01875.120 As above, 120 V~	 01876 230 V~ 50 Hz, for controllable LED RGB lamps, 12-24 Vdc Δ 01876.120 As above, 120 V~
--	--	--

Devices

Grey	White	Metal
Infrared switches		
Δ 19172 Receiver, NO 6 A 230 V~ relay output, 50/60 Hz. Depth: 37 mm	Δ 19173 Receiver, 4 A 230 V~ relay outputs, for rolling shutters - 2 modules. Depth: 37 mm	Δ 19175 Receiver, 40-450 W/VA dimmer, 230 V~. Depth: 41,5 mm
Δ 19172.B Receiver, NO 6 A 230 V~ relay output, 50/60 Hz. Depth: 37 mm	Δ 19173.B Receiver, 4 A 230 V~ relay outputs, for rolling shutters - 2 modules. Depth: 37 mm	Δ 19175.B Receiver, 40-450 W/VA dimmer, 230 V~. Depth: 41,5 mm
Δ 19172.M Receiver, NO 6 A 230 V~ relay output, 50/60 Hz. Depth: 37 mm	Δ 19173.M Receiver, 4 A 230 V~ relay outputs, for rolling shutters - 2 modules. Depth: 37 mm	Δ 19175.M Receiver, 40-450 W/VA dimmer, 230 V~. Depth: 41,5 mm
Δ 01849 IR remote control, 14-channel		
19181 Lighting switch, NO 6 A 230 V~ relay output, 50/60 Hz	19181.B Lighting switch, NO 6 A 230 V~ relay output, 50/60 Hz	19181.M Lighting switch, NO 6 A 230 V~ relay output, 50/60 Hz
19181.120 As above, 120 V~. Depth: 36 mm	19181.120.B As above, 120 V~. Depth: 36 mm	19181.120.M As above, 120 V~. Depth: 36 mm
00800.14 Frame for orientable support surface mounting	00805.14 Adaptor for orientable support flush mounting - 2 modules. Depth: 36,5 mm	00801.14 Oriental support - 1 module
00800 Frame for orientable support surface mounting	00805 Adaptor for orientable support flush mounting - 2 modules. Depth: 36,5 mm	00801 Oriental support - 1 module
02690 Lighting switch, 2000 W incandescent lamps, CFL 10-1000 W, LED 100 W, 220-240 V~ 50/60 Hz, ceiling mounting		
Set/Reset push buttons		
19183 For emergency call, 2 NO 5 A 250 V~, 12 V~/12-24 Vdc (SELV) - 2 modules. Depth: 38,2 mm	19183.B For emergency call, 2 NO 5 A 250 V~, 12 V~/12-24 Vdc (SELV) - 2 modules. Depth: 38,2 mm	19183.M For emergency call, 2 NO 5 A 250 V~, 12 V~/12-24 Vdc (SELV) - 2 modules. Depth: 38,2 mm

* Not to be used in European Countries

▲ New article

Δ Available until stocks last



Devices

Grey

White


Metal

Radiofrequency kits

**OK03906.05**


Kit Friends of Hue Arké Classic. Contains:

- 1 4-button RF device 03906
- 1 mounting frame 19507.CL.B, white
- 2 buttons 19506.B, white
- 2-module cover plate 19642.B66, Reflex Ice total look

**OK03906.06**

Kit Friends of Hue Arké Round. Contains:

- 1 4-button RF device 03906
- 1 mounting frame 19507.RN.B, white
- 2 buttons 19506.B, white
- 2-module cover plate 19672.B66, Reflex Ice total look

**OK03906.07**

Kit Friends of Hue Arké Classic. Contains:

- 1 4-button RF device 03906
- 1 mounting frame 19507.CL, grey
- 2 buttons 19506, grey
- 2-module cover plate 19642.71, Black


**OK03906.08**

Kit Friends of Hue Arké Round. Contains:

- 1 4-button RF device 03906
- 1 mounting frame 19507.RN, grey
- 2 buttons 19506, grey
- 2-module cover plate 19672.81, Black

Grey	White	Metal
------	-------	-------

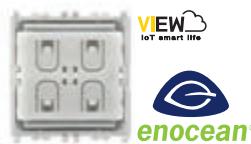
Radiofrequency smart devices




03955
4-button flat device with RF transmission,
868 MHz, **EnOcean®** standard,
to be completed with buttons
19506+19506.2 - 2 modules




01796.2
Multi-function actuator with relay output NO 10 A 230 V~
programmable with switch function for local control,
transferable local input as ON/OFF control for other
EnOcean® actuators, 230 V~ 50/60 Hz power supply



03925
4-button flat device with RF transmission,
2.4 GHz, **Bluetooth® Low Energy**
wireless technology, to be completed
with buttons 19506+19506.2
- 2 modules



03905
4-button flat device with RF transmission,
2.4 GHz, **Zigbee Green Power**
standard, to be completed with
buttons 19506+19506.2 - 2 modules




03906
4-button flat device with RF transmission,
2.4 GHz, **Zigbee Green Power** and
Friends of Hue standard, to be completed
with buttons 19506 - 2 modules



19507
Frame for RF devices surface
mounting, for 2 modules or
2 central modules cover plates




19507.B
Frame for RF devices surface
mounting, for 2 modules or
2 central modules cover plates



19507.CL
Frame for RF devices surface
mounting, for 2 modules Classic
cover plates



19507.RN
Frame for RF devices surface
mounting, for 2 modules Round
cover plates



19507.CL.B
Frame for RF devices surface
mounting, for 2 modules Classic
cover plates



19507.RN.B
Frame for RF devices surface
mounting, for 2 modules Round
cover plates



19506
Pair of 1-module
buttons for
RF devices,
customizable



19506.2
2-module
button for
RF devices,
customizable



19506.B
Pair of 1-module
buttons for
RF devices,
customizable



19506.2.B
2-module
button for
RF devices,
customizable





19506.M
Pair of 1-module
buttons for
RF devices,
customizable







19506.2.M
2-module
button for
RF devices,
customizable

Socket outlets

Grey	White	Metal
SICURY 2P+E Italian standard socket outlets 250 V~		
 19201 10 A, P11. Depth: 25,3 mm	 19201.B 10 A, P11. Depth: 25,3 mm	 19201.M 10 A, P11. Depth: 25,3 mm
 19203 Bpresa 16 A, P17/11. Depth: 25,3 mm	 19203.B Bpresa 16 A, P17/11. Depth: 25,3 mm	 19203.M Bpresa 16 A, P17/11. Depth: 25,3 mm
 19209 16 A, P30 - 2 modules. Depth: 29 mm	 19209.B 16 A, P30 - 2 modules. Depth: 29,4 mm	 19209.M 16 A, P30 - 2 modules. Depth: 29 mm
 19210 16 A, universal - 2 modules. Depth: 26 mm	 19210.B 16 A, universal - 2 modules. Depth: 26 mm	 19210.M 16 A, universal - 2 modules. Depth: 26 mm
View Wireless connected control device for socket outlet		
 19593   	 19593.B   	 19593.M   
SICURY 2P+E socket outlets 250 V~ (for dedicated supply lines)		
 19203.R Bpresa 16 A, P17/11, red. Depth: 25,3 mm	 19209.A 16 A, P30, orange - 2 modules. Depth: 29 mm	 19209.R 16 A, P30, red - 2 modules. Depth: 29 mm
 19209.V 16 A, P30, green - 2 modules. Depth: 29 mm	 19210.R 16 A, universal, red - 2 modules. Depth: 29 mm	
Socket outlets 250 V~ - German standard		
 19208 SICURY 2P+E 16 A, German - 2 modules. Depth: 29 mm	 19208.C SICURY 2P+E 16 A, German, with cover - 2 modules. Depth: 29,9 mm	 19208.B SICURY 2P+E 16 A, German - 2 modules. Depth: 29 mm
 19208.C.B SICURY 2P+E 16 A, German, with cover - 2 modules. Depth: 29,9 mm	 19208.M SICURY 2P+E 16 A, German - 2 modules. Depth: 29 mm	 19208.C.M SICURY 2P+E 16 A, German, with cover - 2 modules. Depth: 29,9 mm

Socket outlets








Grey	White	Metal						
Socket outlets 250 V~, screwless terminals - German standard								
 19208.FX SICURY 2P+E 16 A, German - 2 modules. Depth: 33,1 mm	 19208.FX.C SICURY 2P+E 16 A, German, with cover - 2 modules. Depth: 34,6 mm	 19208.FX.B SICURY 2P+E 16 A, German - 2 modules. Depth: 33,1 mm	 19208.FX.C.B SICURY 2P+E 16 A, German, with cover - 2 modules. Depth: 34,6 mm	 19208.FX.M SICURY 2P+E 16 A, German - 2 modules. Depth: 33,1 mm	 19208.FX.C.M SICURY 2P+E 16 A, German, with cover - 2 modules. Depth: 34,6 mm			
Socket outlets 250 V~ - French standard								
 19212 SICURY 2P+E 16 A, French - 2 modules. Depth: 26 mm	 19212.C SICURY 2P+E 16 A, French, with cover - 2 modules. Depth: 26,9 mm	 19212.B SICURY 2P+E 16 A, French - 2 modules. Depth: 26 mm	 19212.C.B SICURY 2P+E 16 A, French, with cover - 2 modules. Depth: 26,9 mm	 19212.M SICURY 2P+E 16 A, French - 2 modules. Depth: 26 mm	 19212.C.M SICURY 2P+E 16 A, French, with cover - 2 modules. Depth: 26,9 mm			
Socket outlets 250 V~, screwless terminals - French standard								
 19212.FX SICURY 2P+E 16 A, French - 2 modules. Depth: 30,1 mm	 19212.FX.C SICURY 2P+E 16 A, French, with cover - 2 modules. Depth: 31,6 mm	 19212.FX.B SICURY 2P+E 16 A, French - 2 modules. Depth: 30,1 mm	 19212.FX.C.B SICURY 2P+E 16 A, French, with cover - 2 modules. Depth: 31,6 mm	 19212.FX.M SICURY 2P+E 16 A, French - 2 modules. Depth: 30,1 mm	 19212.FX.C.M SICURY 2P+E 16 A, French, with cover - 2 modules. Depth: 31,6 mm			
Socket outlets 250 V~ - English standard								
 19214 SICURY 2P+E 5 A, English - 2 modules. Depth: 18,1 mm	 19219 2P+E 13 A, English - 2 modules. Depth: 17,5 mm	 19220 SICURY 2P+E 13 A, English - 2 modules. Depth: 24,7 mm	 19214.B SICURY 2P+E 5 A, English - 2 modules. Depth: 18,1 mm	 19219.B 2P+E 13 A, English - 2 modules. Depth: 17,5 mm	 19220.B SICURY 2P+E 13 A, English - 2 modules. Depth: 24,7 mm	 19214.M SICURY 2P+E 5 A, English - 2 modules. Depth: 18,1 mm	 19219.M 2P+E 13 A, English - 2 modules. Depth: 17,5 mm	 19220.M SICURY 2P+E 13 A, English - 2 modules. Depth: 24,7 mm
Socket outlets 250 V~ - Swiss standard								
 19226 2P+E 10 A, Swiss, 13-type - 2 modules. Depth: 36,05 mm	 19226.B 2P+E 10 A, Swiss, 13-type - 2 modules. Depth: 36,05 mm	 19226.M 2P+E 10 A, Swiss, 13-type - 2 modules. Depth: 36,05 mm						

* Not to be used in European Countries


▲ New article

Δ Available until stocks last

Socket outlets

Grey	White	Metal
SICURY socket outlets 250 V~ - Euro-American standard		
 19234 2P 16 A, Euro-American (ø 4,8 mm). Depth: 27,8 mm	 19248 2P+E 16 A, Euro-American - 2 modules. Depth: 26 mm	 19249 Two 2P+E 16 A, Euro-American - 3 modules. Depth: 24 mm
 19234.B 2P 16 A, Euro-American (ø 4,8 mm). Depth: 27,8 mm	 19248.B 2P+E 16 A, Euro-American (ø 4,8 mm). Depth: 26 mm	 19249.B Two 2P+E 16 A, Euro-American (ø 4,8 mm). Depth: 24 mm
 19234.M 2P 16 A, Euro-American (ø 4,8 mm). Depth: 27,8 mm	 19248.M 2P+E 16 A, Euro-American - 2 modules. Depth: 26 mm	 19249.M Two 2P+E 16 A, Euro-American - 3 modules. Depth: 24 mm
Socket outlets 127 V~ - USA and Saudi Arabian standards		
 19242 SICURY 2P+E 15 A, USA and Arabian. Depth: 26,9 mm	 19243 Two SICURY 2P+E 15 A, USA and Arabian - 3 modules. Depth: 25,5 mm	 19242.B SICURY 2P+E 15 A, USA and Arabian. Depth: 26,9 mm
 19242.M SICURY 2P+E 15 A, USA and Arabian. Depth: 26,9 mm	 19243.B Two SICURY 2P+E 15 A, USA and Arabian - 3 modules. Depth: 25,5 mm	 19243.M Two SICURY 2P+E 15 A, USA and Arabian - 3 modules. Depth: 25,5 mm
 19245 2P+E 15 A, USA and Arabian. Depth: 26,9 mm	 19246 Two 2P+E 15 A, USA and Arabian - 3 modules. Depth: 25,5 mm	 19245.B 2P+E 15 A, USA and Arabian. Depth: 26,9 mm
 19245.M 2P+E 15 A, USA and Arabian. Depth: 26,9 mm	 19246.B Two 2P+E 15 A, USA and Arabian - 3 modules. Depth: 25,5 mm	 19246.M Two 2P+E 15 A, USA and Arabian - 3 modules. Depth: 25,5 mm
Socket outlets 250 V~ - Israeli standard		
 19240 SICURY 2P+E 16 A, Israeli - 2 modules. Depth: 29,2 mm	 19240.B SICURY 2P+E 16 A, Israeli - 2 modules. Depth: 29,2 mm	 19240.M SICURY 2P+E 16 A, Israeli - 2 modules. Depth: 29,2 mm
Socket outlets 250 V~ - Chinese standard		
 19254 SICURY 2P+E 16 A, Chinese - 2 modules. Depth: 29,3 mm	 19254.B SICURY 2P+E 16 A, Chinese - 2 modules. Depth: 29,3 mm	 19254.M SICURY 2P+E 16 A, Chinese - 2 modules. Depth: 29,3 mm
Socket outlets 250 V~ - Australian standard		
 19262 SICURY 2P+E 15 A, Australian - 2 modules. Depth: 29,7 mm	 19262.B SICURY 2P+E 15 A, Australian - 2 modules. Depth: 29,7 mm	 19262.M SICURY 2P+E 15 A, Australian - 2 modules. Depth: 29,7 mm

Socket outlets

Grey	White	Metal			
Socket outlets 250 V~ - Multistandard					
 19255 SICURY 2P+E 13 A, with 1P 1-way switch, lightable - 3 modules. Depth: 18,8 mm	 *19257 SICURY 2P+E 13 A, - 2 modules. Depth: 18,3 mm	 19255.B SICURY 2P+E 13 A, with 1P 1-way switch, lightable - 3 modules. Depth: 18,8 mm	 *19257.B SICURY 2P+E 13 A, - 2 modules. Depth: 18,3 mm	 19255.M SICURY 2P+E 13 A, with 1P 1-way switch, lightable - 3 modules. Depth: 18,8 mm	 *19257.M SICURY 2P+E 13 A, - 2 modules. Depth: 18,3 mm
British standard socket outlets 250 V~ (with signalling unit 00930 included)					
 19221⁴ SICURY 2P+E 13 A, 1-gang, switched. Depth: 17,5 mm	 19222⁴ SICURY 2P+E 13 A, 2-gang, switched. Depth: 17,5 mm	 19221.B⁴ SICURY 2P+E 13 A, 1-gang, switched. Depth: 17,5 mm	 19222.B⁴ SICURY 2P+E 13 A, 2-gang, switched. Depth: 17,5 mm	 19221.M⁴ SICURY 2P+E 13 A, 1-gang, switched. Depth: 17,5 mm	 19222.M⁴ SICURY 2P+E 13 A, 2-gang, switched. Depth: 17,5 mm
 19221.L⁴ SICURY 2P+E 13 A, 1-gang, switched +indicator unit. Depth: 17,5 mm	 19222.L⁴ SICURY 2P+E 13 A, 2-gang, switched+indicator unit. Depth: 17,5 mm	 19221.L.B⁴ SICURY 2P+E 13 A, 1-gang, switched, +indicator unit. Depth: 17,5 mm	 19222.L.B⁴ SICURY 2P+E 13 A, 2-gang, switched+indicator unit. Depth: 17,5 mm	 19221.L.M⁴ SICURY 2P+E 13 A, 1-gang, switched, +indicator unit. Depth: 17,5 mm	 19222.L.M⁴ SICURY 2P+E 13 A, 2-gang, switched+indicator unit. Depth: 17,5 mm
 19215⁵ SICURY 2P+E 5 A, 1-gang, switched. Depth: 17,5 mm	 19217⁵ SICURY 2P+E 15 A, 1-gang, switched. Depth: 25,5 mm	 19215.B⁵ SICURY 2P+E 5 A, 1-gang, switched. Depth: 17,5 mm	 19217.B⁵ SICURY 2P+E 15 A, 1-gang, switched. Depth: 25,5 mm	 19215.M⁵ SICURY 2P+E 5 A, 1-gang, switched. Depth: 17,5 mm	 19217.M⁵ SICURY 2P+E 15 A, 1-gang, switched. Depth: 25,5 mm
Socket outlets 125 V~ - 2P+E 15 A 60 Hz American standard					
 19296 Double American standard with GFCI - 3 modules. Depth: 31,6 mm	 19296.B Double American standard with GFCI - 3 modules. Depth: 31,6 mm	 19296.M Double American standard with GFCI - 3 modules. Depth: 31,6 mm			


* Not to be used in European Countries

▲ New article

Δ Available until stocks last

■ New article, contact the commercial network for further information

Socket outlets

Grey	White	Metal
British Standard 250 V~ - socket outlets and USB supply units		
		
■ 19223.A SICURY 2P+E 13 A 250 V~ with 2P 1-way switch and 1 USB-A. Depth: 21 mm	■ 19223.A.B SICURY 2P+E 13 A 250 V~ with 2P 1-way switch and 1 USB-A. Depth: 21 mm	■ 19223.A.M SICURY 2P+E 13 A 250 V~ with 2P 1-way switch and 1 USB-A. Depth: 21 mm
		
■ 19224.AC SICURY 2P+E 13 A 250 V~ with 2 2P 1-way switches, 1 USB-A and 1 USB-C. Depth: 21 mm	■ 19224.AC.B SICURY 2P+E 13 A 250 V~ with 2 2P 1-way switches, 1 USB-A and 1 USB-C. Depth: 21 mm	■ 19224.AC.M SICURY 2P+E 13 A 250 V~ with 2 2P 1-way switches, 1 USB-A and 1 USB-C. Depth: 21 mm
		
■ 19266.A SICURY 2P+E 13 A 250 V~, multistandard, with 1 2P 1-way switch and 1 USB-A. Depth: 21 mm	■ 19266.A.B SICURY 2P+E 13 A 250 V~, multistandard, with 1 2P 1-way switch and 1 USB-A. Depth: 21 mm	■ 19266.A.M SICURY 2P+E 13 A 250 V~, multistandard, with 1 2P 1-way switch and 1 USB-A. Depth: 21 mm

Possibles matches - Foreign standard plugs and socket outlets

PLUG	SOCKET OUTLET		English			Swiss	Israeli	British standard					
	German	French	19214	19219	19220			19221	19221.L	19222	19222.L	19215	19217
S10 Italian standard	●	●						●					
2P 2,5 A Europlug	●	●				●	●						
2P+E 16 A 250 V~ German standard	●						○						
2P+E 16 A 250 V~ German and French standards	●	●					○						
2P 16 A 250 V~ German and French standards	●	●					●						
2P+E 16 A 250 V~ French standard		●					○						
2P+E 10 A 250 V~ Swiss standard						●							
2P+E 16 A 250 V~ Israeli standard							●						
2P+E 5 A 250 V~ English standard			●									●	
2P+E 13 A 250 V~ English standard				●	●			●	●	●	●		
2P+E 15 A 250 V~ English standard													●
2P 13 A 220 V~ Saudi Arabian standard								●	●	●	●		

● Plug standard matches socket outlet; ○ Plug standard matches the socket outlet without earth connection.

Socket outlets

	Grey		White		Metal
--	------	--	-------	--	-------

Possibles matches - Foreign standard plugs and socket outlets

PLUG	SOCKET OUTLET	Multistandard		American	Euroamerican			American Saudi Arabian		Chinese	Australian
		19255	19257	19296	19234	19248	19249	19242	19243	19254	19262
S10 Italian standard		●	●		●	●	●				
2P 2,5 A Europlug		●	●		●	●	●				
2P+E 16 A 250 V~ German standard	○	○			○	○	○				
2P+E 16 A 250 V~ German and French standards					○	○	○				
2P 16 A 250 V~ German and French standards					●	●	●				
2P+E 16 A 250 V~ French standard					○	○	○				
2P+E 15 A 125 V~ American standard						●	●				
2P+E 10 A 250 V~ Swiss standard	●	●									
2P+E 5 A 250 V~ English standard	●	●									
2P+E 13 A 250 V~ English standard	●	●									
2P+E 15 A 125 V~ American standard				●				●	●		
2P 15 A 127 V~ American and Saudi Arabian standards								●	●		
2P+E 10 A 250 V~ Brazilian standard	●	●									
2P+E 10 A 250 V~ Chinese standard	●	●								●	
2P+E 10 A 250 V~ Australian standard	●	●									
2P+E 15 A 250 V~ Australian standard											●

● Plug standard matches socket outlet; ○ Plug standard matches the socket outlet without earth connection.






SICURY 2P+E interlocked socket outlets with CB and RCBO $I_{\Delta n} 10 \text{ mA}$, (120-230 V~ 50/60 Hz)

19273 Bpresa 16 A P17/11 250 V~, 1P+N C 16 - 2 modules. Depth: 39,6 mm	19276 16 A P30 250 V~, 1P+N C 16 - 3 modules. Depth: 39,6 mm	19273.B Bpresa 16 A P17/11 250 V~, 1P+N C 16 - 2 modules. Depth: 39,6 mm	19276.B 16 A P30 250 V~, 1P+N C 16 - 3 modules. Depth: 39,6 mm	19273.M Bpresa 16 A P17/11 250 V~, 1P+N C 16 - 2 modules. Depth: 39,6 mm	19276.M 16 A P30 250 V~, 1P+N C 16 - 3 modules. Depth: 39,6 mm
19283 Bpresa 16 A P17/11 250 V~, 1P+N C 16 - 3 modules. Depth: 39,6 mm	19286 16 A P30 250 V~, 1P+N C 16 - 4 modules. Depth: 39,6 mm	19283.B Bpresa 16 A P17/11 250 V~, 1P+N C 16 - 3 modules. Depth: 39,6 mm	19286.B 16 A P30 250 V~, 1P+N C 16 - 4 modules. Depth: 39,6 mm	19283.M Bpresa 16 A P17/11 250 V~, 1P+N C 16 - 3 modules. Depth: 39,6 mm	19286.M 16 A P30 250 V~, 1P+N C 16 - 4 modules. Depth: 39,6 mm

Socket outlets

Grey	White	Metal						
Shaver supply units								
								
19290 230 V~ 50/60 Hz, with 20 VA isolating transformer, 230 V~ and 120 V~ outputs. - 3 modules. Depth: 41,5 mm	19290.B 230 V~ 50/60 Hz, with 20 VA isolating transformer, 230 V~ and 120 V~ outputs. - 3 modules. Depth: 41,5 mm	19290.M 230 V~ 50/60 Hz, with 20 VA isolating transformer, 230 V~ and 120 V~ outputs. - 3 modules. Depth: 41,5 mm						
								
19291⁶ 230 V~ 50/60 Hz, with 20 VA isolating transformer, 230 V~ and 120 V~ outputs. Depth: 41,5 mm	19291.B⁶ 230 V~ 50/60 Hz, with 20 VA isolating transformer, 230 V~ and 120 V~ outputs. Depth: 41,5 mm	19291.M⁶ 230 V~ 50/60 Hz, with 20 VA isolating transformer, 230 V~ and 120 V~ outputs. Depth: 41,5 mm						
USB supply unit								
								
19292 5 V 1,5 A, 1 USB-A, 120-230 V~ 50/60 Hz. Depth: 36,5 mm	▲19292.AC 5 V 2,4 A, USB-A+C, 120-240 V~ 50/60 Hz. Depth: 36 mm	19292.C 5 V 1,5 A, 1 USB-C, 120-240 V~ 50/60 Hz. Depth: 36 mm	19292.B 5 V 1,5 A, 1 USB-A, 120-240 V~ 50/60 Hz. Depth: 36,5 mm	▲19292.AC.B 5 V 2,4 A, USB-A+C, 120-240 V~ 50/60 Hz. Depth: 36 mm	19292.C.B 5 V 1,5 A, 1 USB-C, 120-240 V~ 50/60 Hz. Depth: 36 mm	19292.M 5 V 1,5 A, 1 USB-A, 120-230 V~ 50/60 Hz. Depth: 36,5 mm	▲19292.AC.M 5 V 2,4 A, USB-A+C, 120-240 V~ 50/60 Hz. Depth: 36 mm	19292.C.M 5 V 1,5 A, 1 USB-C, 120-240 V~ 50/60 Hz. Depth: 36 mm
								
19295 5 V 2,1 A, 2 USB-A for total of 2,1 A, 120-230 V~ 50/60 Hz. - 2 modules. Depth: 37 mm	▲19295.AC 5 V 3 A, USB-A+C for total of 3 A, 120-240 V~ 50/60 Hz - 2 modules. Depth: 29,3 mm		19295.B 5 V 2,1 A, 2 USB-A for total of 2,1 A, 120-230 V~ 50/60 Hz - 2 modules. Depth: 37 mm	▲19295.AC.B 5 V 3 A, USB-A+C for total of 3 A, 120-240 V~ 50/60 Hz - 2 modules. Depth: 29,3 mm		19295.M 5 V 2,1 A, 2 USB-A for total of 2,1 A, 120-230 V~ 50/60 Hz - 2 modules. Depth: 37 mm	▲19295.AC.M 5 V 3 A, USB-A+C for total of 3 A, 120-240 V~ 50/60 Hz - 2 modules. Depth: 29,3 mm	
								
▲19295.CC 5 V 3 A, 2 USB-C for total of 3 A, 120-240 V~ 50/60 Hz - 2 modules. Depth: 29 mm	▲19295.CC.B 5 V 3 A, 2 USB-C for total of 3 A, 120-240 V~ 50/60 Hz - 2 modules. Depth: 29 mm	▲19295.CC.M 5 V 3 A, 2 USB-C for total of 3 A, 120-240 V~ 50/60 Hz - 2 modules. Depth: 29 mm						

Signal reception socket outlets


Grey	White	Metal			
Bluetooth® wireless technology smart sound					
 21588 Passive speaker, 8 Ω 10 W, with built-in 8-module mounting frame. Depth: 48 mm	 21588.B Passive speaker, 8 Ω 10 W, with built-in 8-module mounting frame. Depth: 48 mm	 21588.N Passive speaker, 8 Ω 10 W, with built-in 8-module mounting frame, Next. Depth: 48 mm			
 20587 Passive speaker, 8 Ω 3 W - 3 modules. Depth: 40 mm	 19099 Volume control - 2 modules. Depth: 40 mm	 20587.B Passive speaker, 8 Ω 3 W - 3 modules. Depth: 40 mm	 19099.B Volume control - 2 modules. Depth: 40 mm	 20587.N Passive speaker, 8 Ω 3 W, Next - 3 modules. Depth: 40 mm	 19099.M Volume control - 2 modules. Depth: 40 mm
 19590 4+4 W stereo amplifier, 2 outputs for 8 Ω sound diffusers with built-in Bluetooth® wireless technology receiver, 1 LINE IN, supply voltage 12 Vdc - 2 modules. Depth: 36,7 mm	 19590.B¹ 4+4 W stereo amplifier, 2 outputs for 8 Ω sound diffusers with built-in Bluetooth® wireless technology receiver, 1 LINE IN, supply voltage 12 Vdc - 2 modules. Depth: 36,7 mm	 19590.M¹ 4+4 W stereo amplifier, 2 outputs for 8 Ω sound diffusers with built-in Bluetooth® wireless technology receiver, 1 LINE IN, supply voltage 12 Vdc - 2 modules. Depth: 36,7 mm			
<p>¹ The article can be ordered with Bluetooth network customisation (see specifications on page 291)</p>					
Special socket outlets					
 19330 2P 6 A 24 V (SELV), for plug 01620. Depth: 24,5 mm	 19330.B 2P 6 A 24 V (SELV), for plug 01620. Depth: 24,5 mm	 19330.M 2P 6 A 24 V (SELV), for plug 01620. Depth: 24,5 mm			
 19331 2P 6 A 24 V (SELV), for plug 01616/01617. Depth: 24,5 mm	 19331.B 2P 6 A 24 V (SELV), for plug 01616/01617. Depth: 24,5 mm	 19331.M 2P 6 A 24 V (SELV), for plug 01616/01617. Depth: 24,5 mm			
 19345 USB outlet, screw terminals. Depth: 24,2 mm	 19345.B USB outlet, screw terminals. Depth: 24,2 mm	 19345.M USB outlet, screw terminals. Depth: 24,2 mm			
 Δ 19347 S-Video, 4-pin. Depth: 15,5 mm	 Δ 19347.B S-Video, 4-pin. Depth: 15,5 mm	 19347.M S-Video, 4-pin. Depth: 15,5 mm			
 19335 3 RCA outlets, screw terminals. Depth: 24,4 mm	 19335.B 3 RCA outlets, screw terminals. Depth: 24,4 mm	 19335.M 3 RCA outlets, screw terminals. Depth: 24,4 mm			
 19583 Spring connector for speaker. Depth: 18,9 mm	 19583.B Spring connector for speaker. Depth: 18,9 mm	 19583.M Spring connector for speaker. Depth: 18,9 mm			

* Not to be used in European Countries



▲ New article

Δ Available until stocks last

Signal reception socket outlets

Grey	White	Metal
Special socket outlets		
 19346 HDMI, Keystone connection. Depth: 36,9 mm	 19346.H HDMI, Keystone connection, 90° cable. Depth: 36,9 mm	 19348 VGA, 15-pin. Depth: 10 mm
 Δ 19361 BNC, coaxial cable soldering. Depth: 10 mm	 Δ 19365 9-pin, D-SUB, soldering - 2 modules. Depth: 10 mm	 19346.B HDMI, Keystone connection. Depth: 36,9 mm
 Δ 19361.B BNC, coaxial cable soldering. Depth: 10 mm	 Δ 19365.B 9-pin, D-SUB, soldering - 2 modules. Depth: 10 mm	 19346.H.B HDMI, Keystone connection, 90° cable. Depth: 36,9 mm
 19348.B VGA, 15-pin. Depth: 10 mm	 19346.M HDMI, Keystone connection. Depth: 36,9 mm	 19346.H.M HDMI, Keystone connection, 90° cable. Depth: 36,9 mm
 19348.M VGA, 15-pin. Depth: 10 mm		
Phone jack		
 19320 RJ11, 6-position, 4-contact (6/4). Depth: 33,1 mm	 19321 RJ12, 6-position, 6-contact (6/6). Depth: 33,1 mm	 19320.B RJ11, 6-position, 4-contact (6/4). Depth: 33,1 mm
 19320.M RJ11, 6-position, 4-contact (6/4). Depth: 33,1 mm	 19321.M RJ12, 6-position, 6-contact (6/6). Depth: 33,1 mm	 19324 Israeli standard, screw terminals. Depth: 33 mm
 19327 8-contact, French standard - 2 modules. Depth: 21,3 mm	 19324.B Israeli standard, screw terminals. Depth: 33 mm	 19324.M Israeli standard, screw terminals. Depth: 33 mm
 19322 RJ11, 6-position 4-contact (6/4) + cover. Depth: 33 mm	 19323 RJ12, 6-position 6-contact (6/6) + cover. Depth: 33 mm	 19322.B RJ11, 6-position 4-contact (6/4) + cover. Depth: 33 mm
 19325⁷ BT, MASTER. Depth: 33 mm	 19326⁷ BT, SLAVE. Depth: 33 mm	 19323.B RJ12, 6-position 6-contact (6/6) + cover. Depth: 33 mm
 19325.B⁷ BT, MASTER. Depth: 33 mm	 19326.B⁷ BT, SLAVE. Depth: 33 mm	 19322.M RJ11, 6-position 4-contact (6/4) + cover. Depth: 33 mm
 19325.M⁷ BT, MASTER. Depth: 33 mm	 19326.M⁷ BT, SLAVE. Depth: 33 mm	 19323.M RJ12, 6-position 6-contact (6/6) + cover. Depth: 33 mm


Signal reception socket outlets

Grey	White	Metal			
Coaxial TV-RD-SAT 5-2400 MHz socket outlets (output male and female)					
 19300.01 Single connection, 1 dB. Depth: 22,1 mm	 19300.10 Through-line, 10 dB. Depth: 22,5 mm	 19300.01.B Single connection, 1 dB. Depth: 22,1 mm	 19300.10.B Through-line, 10 dB. Depth: 22,5 mm	 19300.01.M Single connection, 1 dB. Depth: 22,1 mm	 19300.10.M Through-line, 10 dB. Depth: 22,5 mm
Coaxial TV-RD-SAT 5-2400 MHz socket outlets, demix (male and F-type outputs)					
 19302.01 Single connection 1 dB - 2 modules. Depth: 22,5 mm	 19302.10 Through-line 10 dB - 2 modules. Depth: 22,5 mm	 19302.01.B Single connection 1 dB - 2 modules. Depth: 22,5 mm	 19302.10.B Through-line 10 dB - 2 modules. Depth: 22,5 mm	 19302.01.M Single connection 1 dB - 2 modules. Depth: 22,5 mm	 19302.10.M Through-line 10 dB - 2 modules. Depth: 22,5 mm
Coaxial TV-FM-SAT 5-2400 MHz socket outlets (male, female and F-type outputs)					
 19303 Single connection 1 dB - 2 modules. Depth: 21,9 mm	 19303.B Single connection 1 dB - 2 modules. Depth: 21,9 mm	 19303.M Single connection 1 dB - 2 modules. Depth: 21,9 mm			
F-type socket outlets					
 19318 With F type female connector. Depth: 10 mm	 19318.B With F type female connector. Depth: 10 mm	 19318.M With F type female connector. Depth: 10 mm			
Coaxial TV 40-862 MHz socket outlets (1 output: female)					
 *19313 Single connection. Depth: 28,5 mm	 *19313.B Single connection. Depth: 28,5 mm	 *19313.M Single connection. Depth: 28,5 mm			
 Δ*19314 Through-line 20 dB. Depth: 28,6 mm	 Δ*19314.B Through-line 20 dB. Depth: 28,6 mm				

Signal reception socket outlets

Grey	White	Metal
Adaptors for coaxial TV-RD-SAT socket outlets		
		
19319 For 2 or 3 outputs - 2 modules	19319.B For 2 or 3 outputs - 2 modules	19319.M For 2 or 3 outputs - 2 modules
Terminal resistor and coaxial TV-RD-SAT 2400 MHz connectors		
		
16330 Z 75 Ω, for frequencies up to 2400 MHz	01644 Male, axial cable entry	01645 Female, axial cable entry
		
01634 Male, 90°-cable entry	01635 Female, 90°-cable entry	01654 Male F-type, for RG59 cable
RJ45 data ports		
 19339.11 Netsafe, Cat. 5e, UTP. Depth: 29,8 mm	 19339.13 Netsafe, Cat. 6, UTP. Depth: 29,8 mm	 19339.14 Netsafe, Cat. 6, FTP. Depth: 29,8 mm
 19339.11.B Netsafe, Cat. 5e, UTP. Depth: 29,8 mm	 19339.13.B Netsafe, Cat. 6, UTP. Depth: 29,8 mm	 19339.14.B Netsafe, Cat. 6, FTP. Depth: 29,8 mm
 19339.11.M Netsafe, Cat. 5e, UTP. Depth: 29,8 mm	 19339.13.M Netsafe, Cat. 6, UTP. Depth: 29,8 mm	 19339.14.M Netsafe, Cat. 6, FTP. Depth: 29,8 mm
 19339.15 Netsafe, Cat. 6A, UTP. Depth: 29,8 mm	 19339.16 Netsafe, Cat. 6A, FTP. Depth: 29,8 mm	 19340.1 Panduit, Cat. 5e, UTP. Depth: 28,3 mm
 19339.15.B Netsafe, Cat. 6A, UTP. Depth: 29,8 mm	 19339.16.B Netsafe, Cat. 6A, FTP. Depth: 29,8 mm	 19340.1.B Panduit, Cat. 5e, UTP. Depth: 28,3 mm
 19339.15.M Netsafe, Cat. 6A, UTP. Depth: 29,8 mm	 19339.16.M Netsafe, Cat. 6A, FTP. Depth: 29,8 mm	
Wi-Fi access point		
 19195 72,2 Mb/s with 2 LAN 10-100 Mb/s ports, ON/OFF inputs for remote control, 230 V~ 50/60 Hz - 2 modules. Depth: 40,7 mm	 19195.B 72,2 Mb/s with 2 LAN 10-100 Mb/s ports, ON/OFF inputs for remote control, 230 V~ 50/60 Hz - 2 modules. Depth: 40,7 mm	 19195.M 72,2 Mb/s with 2 LAN 10-100 Mb/s ports, ON/OFF inputs for remote control, 230 V~ 50/60 Hz - 2 modules. Depth: 40,7 mm

Signal reception socket outlets

Grey	White	Metal
Adapters for data ports		
 19337.C RJ45 Keystone + cover. Depth: 10 mm	 19338.C RJ45, Cat. 5/6 AMP, Lucent T. Depth: 10 mm	 19340.C For MINI-COM Panduit. Depth: 10 mm
 19337.C.B RJ45 Keystone + cover. Depth: 10 mm	 19338.C.B RJ45, Cat. 5/6 AMP, Lucent T. Depth: 10 mm	 19340.C.B For MINI-COM Panduit. Depth: 10 mm
 19337.C.M RJ45 Keystone + cover. Depth: 10 mm	 19338.C.M RJ45, Cat. 5/6 AMP, Lucent T. Depth: 10 mm	 19340.C.M For MINI-COM Panduit. Depth: 10 mm
 19341.C For Cat. 5e and 6 Slim of Infra+, Merlin Gerin. Depth: 10 mm	 19343.K Slanting adaptor for RJ45 Keystone. Depth: 10 mm	 19341.C.B For Cat. 5e and 6 Slim of Infra+, Merlin Gerin. Depth: 10 mm
	 19343.K.B Slanting adaptor for RJ45 Keystone. Depth: 10 mm	 19341.C.M For Cat. 5e and 6 Slim of Infra+, Merlin Gerin. Depth: 10 mm
		 19343.K.M Slanting adaptor for RJ45 Keystone. Depth: 10 mm
Sockets for fibre optic cable		
 19350.SC Monomode 9/125 µm, with SC/ APC simplex adapter. Depth: 19,4 mm	 19350.LC Monomode 9/125 µm, with LC duplex adapter. Depth: 19,3 mm	 19350.SC.B Monomode 9/125 µm, with SC/ APC simplex adapter. Depth: 19,4 mm
	 19350.LC.B Monomode 9/125 µm, with LC duplex adapter. Depth: 19,3 mm	 19350.SC.M Monomode 9/125 µm, with SC/ APC simplex adapter. Depth: 19,4 mm
 19351.SC Multimode 50/125 µm, with SC simplex adapter. Depth: 19,4 mm	 19351.LC Multimode 50/125 µm, with LC duplex adapter. Depth: 18,2 mm	 19351.SC.B Multimode 50/125 µm, with SC simplex adapter. Depth: 19,4 mm
	 19351.LC.B Multimode 50/125 µm, with LC duplex adapter. Depth: 18,2 mm	 19351.SC.M Multimode 50/125 µm, with SC simplex adapter. Depth: 19,4 mm
		 19351.LC.M Multimode 50/125 µm, with LC duplex adapter. Depth: 18,2 mm

Signalling

Grey	White	Metal
Electromechanical bells		
 19370 12 V~ (SELV) 50/60 Hz. Depth: 36,5 mm	 19370.B 12 V~ (SELV) 50/60 Hz. Depth: 36,5 mm	 19370.M 12 V~ (SELV) 50/60 Hz. Depth: 36,5 mm
 19372 120 V~ 50/60 Hz. Depth: 36,5 mm	 19372.B 120 V~ 50/60 Hz. Depth: 36,5 mm	 19372.M 120 V~ 50/60 Hz. Depth: 36,5 mm
 19373 230 V~ 50/60 Hz. Depth: 36,5 mm	 19373.B 230 V~ 50/60 Hz. Depth: 36,5 mm	 19373.M 230 V~ 50/60 Hz. Depth: 36,5 mm
Electronic bells		
 19380 3-sound-sequence, supply voltage 12 V~ and 12 Vdc (SELV) - 2 modules. Depth: 36,5 mm	 19380.B 3-sound-sequence, supply voltage 12 V~ and 12 Vdc (SELV) - 2 modules. Depth: 36,5 mm	 19380.M 3-sound-sequence, supply voltage 12 V~ and 12 Vdc (SELV) - 2 modules. Depth: 36,5 mm
Buzzers		
 19375 12 V~ (SELV) 50/60 Hz. Depth: 36,5 mm	 19375.B 12 V~ (SELV) 50/60 Hz. Depth: 36,5 mm	 19375.M 12 V~ (SELV) 50/60 Hz. Depth: 36,5 mm
 19377 120 V~ 50/60 Hz. Depth: 36,5 mm	 19377.B 120 V~ 50/60 Hz. Depth: 36,5 mm	 19377.M 120 V~ 50/60 Hz. Depth: 36,5 mm
 19378 230 V~ 50/60 Hz. Depth: 36,5 mm	 19378.B 230 V~ 50/60 Hz. Depth: 36,5 mm	 19378.M 230 V~ 50/60 Hz. Depth: 36,5 mm
Luminous indicator units (for 1 or 2 signalling units°)		
 19386 Single, white diffuser. Depth: 22,5 mm	 19386.B Single, white diffuser. Depth: 22,5 mm	 19386.M Single, white diffuser. Depth: 22,5 mm
 19388 Doble, neutral diffusers. Depth: 22,5 mm	 19388.B Doble, neutral diffusers. Depth: 22,5 mm	 19388.M Doble, neutral diffusers. Depth: 22,5 mm
Prismatic indicator units - 2 modules (for 14771 and 14777 lamps - supplied without lamp)		
 19387.B White diffuser - 2 modules. Depth: 25 mm	 19387.R Red diffuser - 2 modules. Depth: 25 mm	 19387.V Green diffuser - 2 modules. Depth: 25 mm

Signalling

Grey	White	Metal
------	-------	-------

Step marker lamps (with high-efficiency LED)




19389
230 V~ 50/60 Hz
- 2 modules.
Depth: 36,5 mm



19389.B
230 V~ 50/60 Hz
- 2 modules.
Depth: 36,5 mm




19389.M
230 V~ 50/60 Hz
- 2 modules.
Depth: 36,5 mm



19381
230 V~ 50/60 Hz
19381.012
12 V~ 50/60 Hz or
12 Vdc (SELV).
Depth: 37 mm

Lighting devices



19383
With high-efficiency LED,
120-230 V~ 50/60 Hz
- 3 modules.
Depth: 36,5 mm



02670.1
With high-efficiency LED, 120-230 V~ 50/60 Hz
and built-in 7-module frame.
Depth: 43 mm

TORCIA, electronic hand-lamps (with automatic emergency device)



19395
With high-efficiency LED,
230 V~ 50/60 Hz
- 2 modules.
Depth: 41,3 mm



19396
With high-efficiency LED,
120 V~ 50/60 Hz
- 2 modules.
Depth: 41,3 mm



19395.B
With high-efficiency LED,
230 V~ 50/60 Hz
- 2 modules.
Depth: 41,3 mm



19396.B
With high-efficiency LED,
120 V~ 50/60 Hz
- 2 modules.
Depth: 41,3 mm



19395.M
With high-efficiency LED,
230 V~ 50/60 Hz
- 2 modules.
Depth: 41,3 mm




19396.M
With high-efficiency LED,
120 V~ 50/60 Hz
- 2 modules.
Depth: 41,3 mm

Emergency lighting devices (with automatic emergency device)



19382
With high-efficiency LED,
230 V~ 50/60 Hz.
Depth: 37 mm



19384
With high-efficiency LED,
120-230 V~ 50/60 Hz
- 3 modules.
Depth: 36,5 mm



02660.1
With high-efficiency LED, 230 V~ 50/60 Hz,
rechargeable Ni-Cd battery and built-in
7-module frame. Depth: 43 mm
Δ 02660.1.120
As above, 120 V~. Depth: 43 mm



02662
LED, controllable,
230 V~ 50 Hz
- 3 modules
02662.120
As above, 120 V~.
Depth: 39 mm



02663
LED RGB, controllable,
230 V~ 50 Hz
- 3 modules
02663.120
As above, 120 V~.
Depth: 39 mm

Rechargeable batteries



00908
3 x Ni-MH 1,2 V
800 mAh,
HR03 (AAA)



00910
Ni-MH 4,8 V 80 mAh
battery, spare part
for TORCIA



00913
Ni-Cd 4,8 V 800 mAh
spare rechargeable battery
for 02660.1

Protection • Detection

Grey	White	Metal						
Protection devices								
 19416 1P 16 A 250 V~ fuse carrier. Depth: 28,5 mm	 19416.B 1P 16 A 250 V~ fuse carrier. Depth: 28,5 mm	 19416.M 1P 16 A 250 V~ fuse carrier. Depth: 28,5 mm						
1P+N circuit breakers (120-230 V~ 50/60 Hz)								
 19405.06 C 6, breaking capacity 1500 A. Depth: 39 mm	 19405.10 C 10, breaking capacity 3000 A. Depth: 39 mm	 19405.16 C 16, breaking capacity 3000 A. Depth: 39 mm	 19405.06.B C 6, breaking capacity 1500 A. Depth: 39 mm	 19405.10.B C 10, breaking capacity 3000 A. Depth: 39 mm	 19405.16.B C 16, breaking capacity 3000 A. Depth: 39 mm	 19405.06.M C 6, breaking capacity 1500 A. Depth: 39 mm	 19405.10.M C 10, breaking capacity 3000 A. Depth: 39 mm	 19405.16.M C 16, breaking capacity 3000 A. Depth: 39 mm
1P+N residual current breakers with overcurrent protection (RCBO) (120-230 V~ 50/60 Hz)								
 19411.06 C 6, $I_{\Delta n}$ 10 mA breaking capacity 1500 A - 2 modules. Depth: 39 mm	 19411.10 C 10, $I_{\Delta n}$ 10 mA breaking capacity 3000 A - 2 modules. Depth: 39 mm	 19411.06.B C 6, $I_{\Delta n}$ 10 mA breaking capacity 1500 A - 2 modules. Depth: 39 mm	 19411.10.B C 10, $I_{\Delta n}$ 10 mA breaking capacity 3000 A - 2 modules. Depth: 39 mm	 19411.06.M C 6, $I_{\Delta n}$ 10 mA breaking capacity 1500 A - 2 modules. Depth: 39 mm	 19411.10.M C 10, $I_{\Delta n}$ 10 mA breaking capacity 3000 A - 2 modules. Depth: 39 mm			
 19411.16 C 16, $I_{\Delta n}$ 10 mA breaking capacity 3000 A - 2 modules. Depth: 39 mm	 19411.16.6 C 16, $I_{\Delta n}$ 6 mA breaking capacity 3000 A - 2 modules. Depth: 39 mm	 19411.16.B C 16, $I_{\Delta n}$ 10 mA breaking capacity 3000 A - 2 modules. Depth: 39 mm	 19411.16.6.B C 16, $I_{\Delta n}$ 6 mA breaking capacity 3000 A - 2 modules. Depth: 39 mm	 19411.16.M C 16, $I_{\Delta n}$ 10 mA breaking capacity 3000 A - 2 modules. Depth: 39 mm	 19411.16.6.M C 16, $I_{\Delta n}$ 6 mA breaking capacity 3000 A - 2 modules. Depth: 39 mm			
Detectors (230 V~ 50/60 Hz)								
 19420 Gas Stop Metano, methane gas detector, solenoid valve control - 3 modules. Depth: 36,5 mm	 19421 Gas Stop GPL, LPG gas detector, solenoid valve control - 3 modules. Depth: 36,5 mm	 19420.B Gas Stop Metano, methane gas detector, solenoid valve control - 3 modules. Depth: 36,5 mm	 19421.B Gas Stop GPL, LPG gas detector, solenoid valve control - 3 modules. Depth: 36,5 mm	 19420.M Gas Stop Metano, methane gas detector, solenoid valve control - 3 modules. Depth: 36,5 mm	 19421.M Gas Stop GPL, LPG gas detector, solenoid valve control - 3 modules. Depth: 36,5 mm			




Δ 01899

Gas test cylinder for testing Gas Stop Metano and GPL detectors




Comfort • Climate

Grey	White	Metal	
Clocks (120-230 V~ 50/60 Hz)			
 19448 24h/7day timer-switch, 1-canal, 8 A 230 V~ change-over relay output - 2 modules. Depth: 37 mm	 19448.B 24h/7day timer-switch, 1-canal, 8 A 230 V~ change-over relay output - 2 modules. Depth: 37 mm	 19448.M 24h/7day timer-switch, 1-canal, 8 A 230 V~ change-over relay output - 2 modules. Depth: 37 mm	
Electronic thermostats (heating and air-conditioning, 120-230 V~ 50/60 Hz)			
 02950 ON/OFF, control of energy saving input, 6(2) A 230 V~ change-over relay output - 2 modules. Depth: 37 mm	 02950.B Touch screen, ON/OFF and PID temperature control, 1 input for temperature sensor, 1 multi-function input, 5(2) A 230 V~ change-over relay output - 2 modules. Depth: 38,5 mm	 02950.M ON/OFF, control of energy saving input, 6(2) A 230 V~ change-over relay output - 2 modules. Depth: 37 mm	
 02950.BN Touch screen, ON/OFF and PID temperature control, 1 input for temperature sensor, 1 multi-function input, 5(2) A 230 V~ change-over relay output - 2 modules. Depth: 38,5 mm			
Electronic timer-thermostats (heating and air-conditioning)			
 02955 ON/OFF with input for remote control via dialler, 6(2) A 230 V~ change-over relay output AA (LR6) 1,5 V battery (supplied) - 3 modules. Depth: 42,5 mm	 02955.B Touch screen, ON/OFF and PID temperature control, 1 temperature sensor input, 1 multi-function input, 1 RJ9 input for energy meter (02960), 5(2) A 230 V~ change-over relay output - 3 modules. Depth: 35,3 mm	 02955.M ON/OFF with input for remote control via dialler, 6(2) A 230 V~ change-over relay output AA (LR6) 1,5 V battery (supplied) - 3 modules. Depth: 42,5 mm	
 02955.BN Touch screen, ON/OFF and PID temperature control, 1 temperature sensor input, 1 multi-function input, 1 RJ9 input for energy meter (02960), 5(2) A 230 V~ change-over relay output - 3 modules. Depth: 35,3 mm			
Electronic sensors			
 19432 Electronic temperature sensor. Depth: 24,4 mm	 19433 Electronic humidity sensor, 1 0-10 V or 4-20 mA output- 2 modules. Depth: 37 mm	 19432.B Electronic temperature sensor. Depth: 24,4 mm	 19433.B Electronic humidity sensor, 1 0-10 V or 4-20 mA output- 2 modules. Depth: 37 mm
 19432.M Electronic temperature sensor. Depth: 24,4 mm		 19433.M Electronic humidity sensor, 1 0-10 V or 4-20 mA output- 2 modules. Depth: 37 mm	

Climate • Stand alone solutions

Grey	White	Metal
Switches for fan-coil regulation		
 19095 Slide, 1P 6(2) A 250 V~, 4-position. Depth: 39,5 mm	 19095.B Slide, 1P 6(2) A 250 V~, 4-position. Depth: 39,5 mm	 19095.M Slide, 1P 6(2) A 250 V~, 4-position. Depth: 39,5 mm
Power meter		
 02960 3 inputs for sensor 01457, 50 W-10 kW detectable power, for DIN (60715 TH35) rail installation 1x17,5 mm. Supplied with 01457	Wired temperature sensor	
		02965.1 Wired temperature sensor, NTC 10 KΩ, cable length 3 m
Video door entry system		
 Δ 19558 3,5" monitor, for Due Fili Plus video door system, with built-in 8-module mounting frame. Depth: 25,5 mm	 Δ 19558.B 3,5" monitor, for Due Fili Plus video door system, with built-in 8-module mounting frame. Depth: 25,5 mm	 Δ 19558.M 3,5" monitor, for Due Fili Plus video door system, with built-in 8-module mounting frame. Depth: 25,5 mm
 19557 Speakerphone for Due Fili system - 3 modules Depth: 37 mm	 19557.B Speakerphone for Due Fili system - 3 modules Depth: 37 mm	 19557.M Speakerphone for Due Fili system - 3 modules Depth: 37 mm
 19577 Call button for Due Fili system - 3 modules Depth: 37 mm	 19577.B Call button for Due Fili system - 3 modules Depth: 37 mm	 19577.M Call button for Due Fili system - 3 modules Depth: 37 mm

Hotel solutions

Grey	White	Metal			
Hotel solutions					
					
02686 Control device with four push buttons 1P NO 12 vdc 50 mA max., to be completed with 2-module back-lightable interchangeable button caps - 2 modules. Depth: 15 mm					
 19026.DND Do Not Disturb with diffuser	 19026.PLS Please Clean with diffuser	 19026.DND.B Do Not Disturb with diffuser	 19026.PLS.B Please Clean with diffuser	 19026.DND.M Do Not Disturb with diffuser	 19026.PLS.M Please Clean with diffuser
 19099 Volume control, 8 Ω 15 W - 2 modules. Depth: 30,1 mm	 19099.B Volume control, 8 Ω 15 W - 2 modules. Depth: 30,1 mm			 19099.M Volume control, 8 Ω 15 W - 2 modules. Depth: 30,1 mm	
 19097 NO 10 A 230 V~, for hotel "Do Not Disturb" and "Please Clean" lightable - 2 modules. Depth: 28 mm	 00975 Card to customise for 19097 button			 02685 4 signalling indicator: IN, Do Not Disturb, OUT, waitress symbol, white - 2 modules. Depth: 22 mm	
 19290 230 V~ 50/60 Hz, with 20 VA isolating transformer, 230 V~ and 120 V~ outputs - 3 modules. Depth: 41,5 mm	 19290.B 230 V~ 50/60 Hz, with 20 VA isolating transformer, 230 V~ and 120 V~ outputs - 3 modules. Depth: 41,5 mm	 19291.B[®] 230 V~ 50/60 Hz, with 20 VA isolating transformer, 230 V~ and 120 V~ outputs. Depth: 41,5 mm		 ▲ 19290.M 230 V~ 50/60 Hz, with 20 VA isolating transformer, 230 V~ and 120 V~ outputs - 3 modules. Depth: 41,5 mm	 19291.M[®] 230 V~ 50/60 Hz, with 20 VA isolating transformer, 230 V~ and 120 V~ outputs. Depth: 41,5 mm
 02690 Lighting switch, 2000 W incandescent lamps, CFL 10-1000 W, LED 100 W, 220-240 V~ 50/60 Hz, ceiling mounting					

* Not to be used in European Countries

▲ New article

Δ Available until stocks last

Hotel solutions

Grey

White

Metal

Hotel solutions

Access control system



19461
Smart card reader/programmer,
12-24 V~ 50/60 Hz/ 12-24 Vdc
(SELV) - 3 modules.
Depth: 37 mm



19461.B
Smart card reader/programmer,
12-24 V~ 50/60 Hz/ 12-24 Vdc
(SELV) - 3 modules.
Depth: 37 mm



19463
Electronic switch, vertical
pocket, 120-230 V~
50/60 Hz - 2 modules.
Depth: 20,5 mm



19465
Electronic switch, vertical
pocket, 230 V~ 50/60 Hz,
24 V~/24 Vdc (SELV)
- 3 modules.
Depth: 37 mm



19463.B
Electronic switch, vertical
pocket, 120-230 V~
50/60 Hz - 2 modules.
Depth: 20,5 mm



19465.B
Electronic switch, vertical
pocket, 230 V~ 50/60 Hz,
24 V~/24 Vdc (SELV)
- 3 modules.
Depth: 37 mm



19463.M
Electronic switch, vertical
pocket, 120-230 V~
50/60 Hz - 2 modules.
Depth: 20,5 mm



19465.M
Electronic switch, vertical
pocket, 230 V~ 50/60 Hz,
24 V~/24 Vdc (SELV)
- 3 modules.
Depth: 37 mm



19468
NFC/RFID electronic reader,
suitable for **AGB Electronic
Solutions** for hotel, vertical
pocket, 120-230 V~
50/60 Hz - 3 modules.
Depth: 30,5 mm



19468.1
NFC/RFID electronic reader,
suitable for **CISA Electronic
Solutions** for hotel, vertical
pocket, 120-230 V~
50/60 Hz - 3 modules.
Depth: 30,5 mm



19468.B
NFC/RFID electronic reader,
suitable for **AGB Electronic
Solutions** for hotel, vertical
pocket, 120-230 V~
50/60 Hz - 3 modules.
Depth: 30,5 mm



19468.1.M
NFC/RFID electronic reader,
suitable for **CISA Electronic
Solutions** for hotel, vertical
pocket, 120-230 V~
50/60 Hz - 3 modules.
Depth: 30,5 mm



19468.M
NFC/RFID electronic reader,
suitable for **AGB Electronic
Solutions** for hotel, vertical
pocket, 120-230 V~
50/60 Hz - 3 modules.
Depth: 30,5 mm



19468.1.M
NFC/RFID electronic reader,
suitable for **CISA Electronic
Solutions** for hotel, vertical
pocket, 120-230 V~
50/60 Hz - 3 modules.
Depth: 30,5 mm



19469
NFC/RFID electronic reader,
suitable for **Mifare Electronic
Solutions** for hotel, vertical
pocket, 120-230 V~
50/60 Hz - 3 modules.
Depth: 30 mm



19469.B
NFC/RFID electronic reader,
suitable for **Mifare Electronic
Solutions** for hotel, vertical
pocket, 120-230 V~
50/60 Hz - 3 modules.
Depth: 30,5 mm



19469.M
NFC/RFID electronic reader,
suitable for **Mifare Electronic
Solutions** for hotel, vertical
pocket, 120-230 V~
50/60 Hz - 3 modules.
Depth: 30,5 mm



16452
Programmable smart card
16452.H
As above, customizable



16452.S
ISO-card (badge)

ARKÉ fit

Cover plates



Metal-Elite

(Refined metal)



▲ 12 Brushed brass



▲ 08 Brushed inox

Metal-Color

(Varnished metal)



▲ 03 Silver



▲ 02 Matt slate



▲ 24 Matt bronze

▲ New article

Pastello
(Varnished metal)

▲ 31 Lipari Sands



▲ 32 Dove Grey



▲ 33 Siena Soil

Total Look
(Varnished metal)

▲ 26 Polar matt



▲ 01 Matt graphite



▲ 14 Metal

Metal-Elite

(Refined metal)



07 Gold



08 Brushed inox



09 Black chrome



10 Black nickel

Metal-Color

(Varnished metal)



01 Matt graphite



02 Matt slate



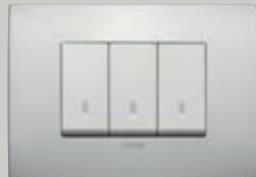
03 Silver



04 Matt titanium

Alu-Tech

(Aluminium)



15 Aluminium



16 Lava



17 Dark bronze

Wood

(Solid wood)



41 Wengé



42 Cherrywood



43 Larch

Reflex Plus

(Reflex)



61 Smoke grey



62 Caramel



63 Orange



64 Marine blue

Color-Tech

(Varnished technopolymer)



75 Matt red



76 Matt blue



77 Matt green



78 Matt gold

Tecno-Basic

(Satin technopolymer)



71 Black



72 Grey



73 Ivory



74 White



11 Brushed copper



12 Brushed brass



05 Matt pearl



06 Polar

B06 Polar total look
(with white frame)

13 Matt champagne



65 Sagegreen



66 Ice

B66 Ice total look
(with white frame)

67 Ivory



79 Silver matt



80 Metal

Round cover plates

Metal-Elite

(Refined metal)



27 Gold



28 Chrome



29 Dark nickel



30 Matt nickel

Metal-Color

(Varnished metal)



21 Matt graphite



22 Slate



23 Matt silver



24 Matt bronze

Wood

(Solid wood)



51 Walnut



52 Cherrywood



53 Maple

Reflex Plus

(Reflex)



61 Smoke grey



62 Caramel



63 Orange



64 Marine blue

Color-Tech

(Varnished technopolymer)



85 Red



86 Blue



87 Green



88 Antique gold

Tecno-Basic

(Technopolymer)



81 Black



82 Grey



83 Ivory



84 White



11 Brushed copper



12 Brushed brass



25 Matt pearl



26 Polar matt

B26 Polar matt total look
(with white frame)

13 Matt champagne



65 Sagegreen



66 Ice

B66 Ice total look
(with white frame)

67 Ivory





89 Silver




80 Metal


Cover plates: guideline

	3-module	4-module	7-module
			
Metal-Elite (Refined metal)			
 Brushed brass	▲19953.12	▲19954.12	▲19957.12
 Brushed inox	▲19953.08	▲19954.08	▲19957.08
Metal-Color (Varnished metal)			
 Silver	▲19953.03	▲19954.03	▲19957.03
 Matt slate	▲19953.02	▲19954.02	▲19957.02
 Matt bronze	▲19953.24	▲19954.24	▲19957.24
Pastello (Varnished metal)			
 Lipari Sands	▲19953.31	▲19954.31	▲19957.31
 Dove Grey	▲19953.32	▲19954.32	▲19957.32
 Siena Soil	▲19953.33	▲19954.33	▲19957.33
Total Look (Varnished metal)			
 Polar matt	▲19953.26	▲19954.26	▲19957.26
 Graffite matt	▲19953.01	▲19954.01	▲19957.01
 Metal	▲19953.14	▲19954.14	▲19957.14

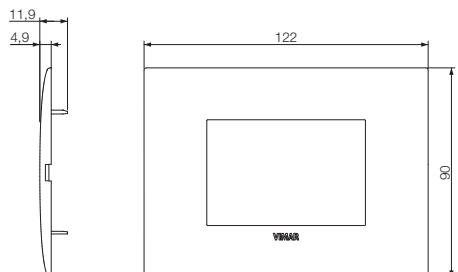
Dimensions



19953... - 3-module cover plate



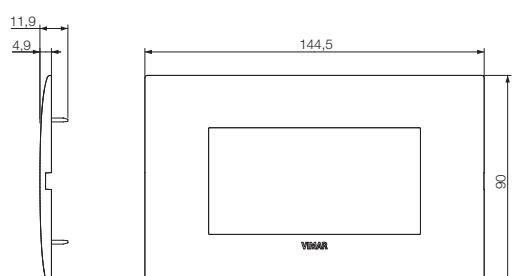


19954... - 4-module cover plate

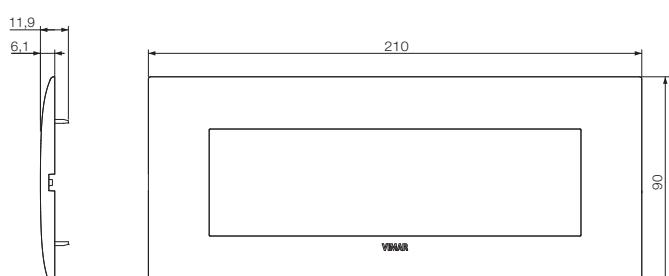

19957... - 7-module cover plate

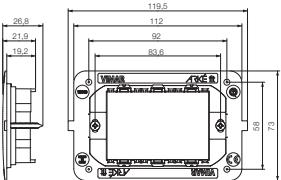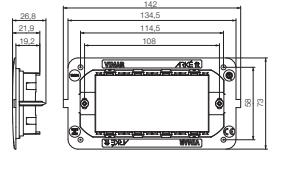
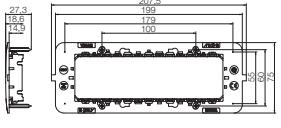
Types of mounting

Module	Box	Frame	Cover plate*	Spacer
3	<p>Flush mounting</p>  <p>V71303 For masonry GW 650 °C, light blue V71303.AU GW 960 °C, black</p>  <p>V71703 For hollow walls, GW 850 °C, light blue</p>	 <p>19913 3-module, with screws</p> 	 <p>19953... Fit 3-module Dimensions: 122x90x4,9 mm</p>	 <p>19913.D... To be used when installing: 19478, 19446, 19196, 19195, 19135, 19135.1, 19136.1, 19593.</p>
4	 <p>V71304 For masonry GW 650 °C, light blue V71304.AU GW 960 °C, black</p>  <p>V71704 For hollow walls, GW 850 °C, light blue</p>	 <p>19914 4-module, with screws</p> 	 <p>19954... Fit 4-module Dimensions: 144,5x90x4,9 mm</p>	 <p>19914.D... To be used when installing: 19478, 19446, 19196, 19195, 19135, 19135.1, 19136.1, 19593.</p>
7	 <p>V71306 For masonry GW 650 °C, light blue V71306.AU GW 960 °C, black</p>  <p>V71706 For hollow walls, GW 850 °C, light blue</p>	 <p>19917 7-module, with screws</p> 	 <p>19957... Fit 7-module Dimensions: 210x90x6,1 mm</p>	

Cover plates: guideline

	1-central-module		2-module		2-central-module		3-module		4-module	
										
	Classic	Round	Classic	Round	Classic	Round	Classic	Round	Classic	Round
Metal-Elite (Refined metal)										
Gold	19641.07	19671.27	19642.07	19672.27	19652.07	19682.27	19653.07	19683.27	19654.07	19684.27
Brushed inox	19641.08	-	19642.08	-	19652.08	-	19653.08	-	19654.08	-
Black chrome	19641.09	-	19642.09	-	19652.09	-	19653.09	-	19654.09	-
Black nickel	19641.10	-	19642.10	-	19652.10	-	19653.10	-	19654.10	-
Brushed copper	19641.11	19671.11	19642.11	19672.11	19652.11	19682.11	19653.11	19683.11	19654.11	19684.11
Brushed brass	19641.12	19671.12	19642.12	19672.12	19652.12	19682.12	19653.12	19683.12	19654.12	19684.12
Chrome	-	19671.28	-	19672.28	-	19682.28	-	19683.28	-	19684.28
Dark nickel	-	19671.29	-	19672.29	-	19682.29	-	19683.29	-	19684.29
Matt nickel	-	19671.30	-	19672.30	-	19682.30	-	19683.30	-	19684.30
Metal-Color (Varnished metal)										
Matt graphite	19641.01	19671.21	19642.01	19672.21	19652.01	19682.21	19653.01	19683.21	19654.01	19684.21
Matt slate	19641.02	-	19642.02	-	19652.02	-	19653.02	-	19654.02	-
Silver	19641.03	-	19642.03	-	19652.03	-	19653.03	-	19654.03	-
Matt titanium	19641.04	-	19642.04	-	19652.04	-	19653.04	-	19654.04	-
Matt pearl	19641.05	-	19642.05	-	19652.05	-	19653.05	-	19654.05	-
Polar	19641.06	-	19642.06	-	19652.06	-	19653.06	-	19654.06	-
Polar total look (with white frame)	19641.B06	-	19642.B06	-	19652.B06	-	19653.B06	-	19654.B06	-
Slate	-	19671.22	-	19672.22	-	19682.22	-	19683.22	-	19684.22
Matt silver	-	19671.23	-	19672.23	-	19682.23	-	19683.23	-	19684.23
Matt bronze	-	19671.24	-	19672.24	-	19682.24	-	19683.24	-	19684.24
Matt pearl	-	19671.25	-	19672.25	-	19682.25	-	19683.25	-	19684.25
Polar matt	-	19671.26	-	19672.26	-	19682.26	-	19683.26	-	19684.26
Polar matt total look (with white frame)	-	19671.B26	-	19672.B26	-	19682.B26	-	19683.B26	-	19684.B26
Matt champagne	19641.13	19671.13	19642.13	19672.13	19652.13	19682.13	19653.13	19683.13	19654.13	19684.13
Alu-Tech (Aluminium)										
Aluminium	19641.15	-	19642.15	-	19652.15	-	19653.15	-	19654.15	-
Lava	19641.16	-	19642.16	-	19652.16	-	19653.16	-	19654.16	-
Dark bronze	19641.17	-	19642.17	-	19652.17	-	19653.17	-	19654.17	-



Cover plates: guideline

7-module	8-module	14-module	21-module	Panel mounting 1-module	Panel mounting 2-module
					
Classic	Round	Classic	Round	Classic	Round
<hr/>					
19657.07	19687.27	19668.07	19698.27	-	-
19657.08	-	19668.08	-	-	-
19657.09	-	19668.09	-	-	-
19657.10	-	19668.10	-	-	-
19657.11	19687.11	19668.11	19698.11	-	-
19657.12	19687.12	19668.12	19698.12	-	-
-	19687.28	-	19698.28	-	-
-	19687.29	-	19698.29	-	-
-	19687.30	-	19698.30	-	-
<hr/>					
19657.01	19687.21	19668.01	19698.21	-	-
19657.02	-	19668.02	-	-	-
19657.03	-	19668.03	-	-	-
19657.04	-	19668.04	-	-	-
19657.05	-	19668.05	-	-	-
19657.06	-	19668.06	-	-	-
19657.B06	-	19668.B06	-	-	-
-	19687.22	-	19698.22	-	-
-	19687.23	-	19698.23	-	-
-	19687.24	-	19698.24	-	-
-	19687.25	-	19698.25	-	-
-	19687.26	-	19698.26	-	-
-	19687.B26	-	19698.B26	-	-
19657.13	19687.13	19668.13	19698.13	-	-
<hr/>					
19657.15	-	19668.15	-	-	-
19657.16	-	19668.16	-	-	-
19657.17	-	19668.17	-	-	-

Cover plates: guideline

	1-central-module		2-module		2-central-module		3-module		4-module	
										
	Classic	Round	Classic	Round	Classic	Round	Classic	Round	Classic	Round
Wood (Solid wood)										
 Wengé	19641.41	-	19642.41	-	19652.41	-	19653.41	-	19654.41	-
 Cherrywood	19641.42	19671.52	19642.42	19672.52	19652.42	19682.52	19653.42	19683.52	19654.42	19684.52
 Larch	19641.43	-	19642.43	-	19652.43	-	19653.43	-	19654.43	-
 Walnut	-	19671.51	-	19672.51	-	19682.51	-	19683.51	-	19684.51
 Maple	-	19671.53	-	19672.53	-	19682.53	-	19683.53	-	19684.53
Reflex Plus (Reflex)										
 Smoke grey	19641.61	19671.61	19642.61	19672.61	19652.61	19682.61	19653.61	19683.61	19654.61	19684.61
 Caramel	19641.62	19671.62	19642.62	19672.62	19652.62	19682.62	19653.62	19683.62	19654.62	19684.62
 Orange	19641.63	19671.63	19642.63	19672.63	19652.63	19682.63	19653.63	19683.63	19654.63	19684.63
 Marine blue	19641.64	19671.64	19642.64	19672.64	19652.64	19682.64	19653.64	19683.64	19654.64	19684.64
 Sagegreen	19641.65	19671.65	19642.65	19672.65	19652.65	19682.65	19653.65	19683.65	19654.65	19684.65
 Ice	19641.66	19671.66	19642.66	19672.66	19652.66	19682.66	19653.66	19683.66	19654.66	19684.66
 Ice total look (with white frame)	19641.B66	19671.B66	19642.B66	19672.B66	19652.B66	19682.B66	19653.B66	19683.B66	19654.B66	19684.B66
 Ivory	19641.67	19671.67	19642.67	19672.67	19652.67	19682.67	19653.67	19683.67	19654.67	19684.67
Color-Tech (Varnished technopolymer)										
 Matt red	19641.75	-	19642.75	-	19652.75	-	19653.75	-	19654.75	-
 Matt blue	19641.76	-	19642.76	-	19652.76	-	19653.76	-	19654.76	-
 Matt green	19641.77	-	19642.77	-	19652.77	-	19653.77	-	19654.77	-
 Matt gold	19641.78	-	19642.78	-	19652.78	-	19653.78	-	19654.78	-
 Matt silver	19641.79	-	19642.79	-	19652.79	-	19653.79	-	19654.79	-
 Metal	19641.80	19671.80	19642.80	19672.80	19652.80	19682.80	19653.80	19683.80	19654.80	19684.80
 Red	-	19671.85	-	19672.85	-	19682.85	-	19683.85	-	19684.85
 Blue	-	19671.86	-	19672.86	-	19682.86	-	19683.86	-	19684.86
 Green	-	19671.87	-	19672.87	-	19682.87	-	19683.87	-	19684.87
 Antique gold	-	19671.88	-	19672.88	-	19682.88	-	19683.88	-	19684.88
 Silver	-	19671.89	-	19672.89	-	19682.89	-	19683.89	-	19684.89
Tecno-basic (Technopolymer)										
 Black	19641.71	19671.81	19642.71	19672.81	19652.71	19682.81	19653.71	19683.81	19654.71	19684.81
 Grey	19641.72	19671.82	19642.72	19672.82	19652.72	19682.82	19653.72	19683.82	19654.72	19684.82
 Ivory	19641.73	19671.83	19642.73	19672.83	19652.73	19682.83	19653.73	19683.83	19654.73	19684.83
 White	19641.74	19671.84	19642.74	19672.84	19652.74	19682.84	19653.74	19683.84	19654.74	19684.84


Cover plates: guideline

7-module	8-module	14-module	21-module	Panel mounting 1-module	Panel mounting 2-module
 Classic	 Classic	 Classic	 Classic	 Classic	 Classic
 Round	 Round			 Round	 Round
19657.41	-	19668.41	-	-	-
19657.42	19687.52	19668.42	19698.52	-	-
19657.43	-	19668.43	-	-	-
-	19687.51	-	19698.51	-	-
-	19687.53	-	19698.53	-	-
19657.61	19687.61	19668.61	19698.61	-	-
19657.62	19687.62	19668.62	19698.62	-	-
19657.63	19687.63	19668.63	19698.63	-	-
19657.64	19687.64	19668.64	19698.64	-	-
19657.65	19687.65	19668.65	19698.65	-	-
19657.66	19687.66	19668.66	19698.66	-	-
19657.B66	19687.B66	19668.B66	19698.B66	-	-
19657.67	19687.67	19668.67	19698.67	-	-
19657.75	-	19668.75	-	-	-
19657.76	-	19668.76	-	-	-
19657.77	-	19668.77	-	-	-
19657.78	-	19668.78	-	-	-
19657.79	-	19668.79	-	-	-
19657.80	19687.80	19668.80	19698.80	-	-
-	19687.85	-	19698.85	-	-
-	19687.86	-	19698.86	-	-
-	19687.87	-	19698.87	-	-
-	19687.88	-	19698.88	-	-
-	19687.89	-	19698.89	-	-
19657.71	19687.81	19668.71	19698.81	19660.71	19661.71
19657.72	19687.82	19668.72	19698.82	19660.72	19661.72
19657.73	19687.83	19668.73	19698.83	19660.73	19661.73
19657.74	19687.84	19668.74	19698.84	19660.74	19661.74
				19666.71	19666.72
				19696.81	19696.82
				19667.71	19667.72
				19697.81	19697.82
				19666.73	19667.73
				19696.83	19697.83
				19667.74	19697.84

British standard cover plates: guideline

	1 module	2 modules	3 modules	5 modules
				
Metal-Elite (Refined metal)				
 Brushed inox	19641.08	19642.08	19648.08	19649.08
 Black nickel	19641.10	19642.10	19648.10	19649.10
 Brushed copper	19641.11	19642.11	19648.11	19649.11
 Brushed brass	19641.12	19642.12	19648.12	19649.12
Metal-Color (Varnished metal)				
 Matt graphite	19641.01	19642.01	19648.01	19649.01
 Matt titanium	19641.04	19642.04	19648.04	19649.04
 Polar total look (with white frame)	19641.B06	19642.B06	19648.B06	19649.B06
 Matt champagne	19641.13	19642.13	19648.13	19649.13
Alu-Tech (Aluminium)				
 Aluminium	19641.15	19642.15	19648.15	19649.15
 Lava	19641.16	19642.16	19648.16	19649.16
 Dark bronze	19641.17	19642.17	19648.17	19649.17
Color-Tech (Varnished technopolymer)				
 Matt silver	19641.79	19642.79	19648.79	19649.79
 Metal	19641.80	19642.80	19648.80	19649.80
Tecno-basic (Technopolymer)				
 Black	19641.71	19642.71	19648.71	19649.71
 White	19641.74	19642.74	19648.74	19649.74




German and French standard cover plates: guideline

	2-module	2+2-module (between centres 71 mm)	2+2+2-module (between centres 71 mm)	2+2+2+2-module (between centres 71 mm)
				
Metal-Elite (Refined metal)				
 Brushed inox	19642.08	19643.08	19644.08	19669.08
 Brushed brass	19642.12	19643.12	19644.12	19669.12
Metal-Color (Varnished metal)				
 Matt graphite	19642.01	19643.01	19644.01	19669.01
 Matt titanium	19642.04	19643.04	19644.04	19669.04
 Polar	19642.06	19643.06	19644.06	19669.06
 Matt champagne	19642.13	19643.13	19644.13	19669.13
Color-Tech (Varnished technopolymer)				
 Matt gold	19642.78	19643.78	19644.78	19669.78
 Matt silver	19642.79	19643.79	19644.79	19669.79
 Metal	19642.80	19643.80	19644.80	19669.80
Tecno-basic (Technopolymer)				
 Black	19642.71	19643.71	19644.71	19669.71
 Ivory	19642.73	19643.73	19644.73	19669.73
 White	19642.74	19643.74	19644.74	19669.74

Types of mounting

Module	Box	Frame	Cover plate*
1 for ø 60 mm mounting box	Flush mounting  V71001 For masonry GW 650 °C, light blue V71001.AU GW 960 °C, black	 19601 1-module, with claws	Classic  19641... 1-module Dimensions: 90x90x8,6 mm
2 and 2 centrals for ø 60 mm mounting box	  V71701 For hollow walls, for frame without claws, GW 850 °C, light blue	  19602 2-module, with claws 19603 2-module, without screws	Classic  19642... 2-module Dimensions: 90x90x8,6 mm
2 centrals	Flush mounting  V71303 For masonry GW 650 °C, light blue V71303.AU GW 960 °C, black	 19612 2-central-module, with screws	Classic  19652... 2-central-module Dimensions: 122x90x8,6 mm
3	  V71703 For hollow walls, GW 850 °C, light blue	 19613 3-module, with screws	Classic  19653... 3-module Dimensions: 122x90x8,6 mm
4	Flush mounting  V71304 For masonry GW 650 °C, light blue V71304.AU GW 960 °C, black	Table mounting  19784 4-module, grey 19784.B : white	Classic  19654... 4-module Dimensions: 144,5x90x8,6 mm
		 19614 4-module, with screws	Round  19684... 4-module Dimensions: 144,5x90x8,5 mm


Types of mounting

Module	Box	Frame	Cover plate*
1	Panel mounting  16776.AU GW 960 °C	  19626 1-module, with screws	Classic  19666... 1-module Dimensions: 40x82x8,6 mm
			Round  19696... 1-module Dimensions: 40x82x8,2 mm
2	Panel mounting  16776.AU x 2 GW 960 °C	  19627 2-module, with screws	Classic  19667... 2-module Dimensions: 40x139x8,6 mm
			Round  19697... 2-module Dimensions: 40x139x8,7 mm
1 and 2 for ø 60 mm and 65 mm mounting box	Flush mounting  19601 1-module, with claws	  19601 1-module, with claws	Classic  19641... 1-module Dimensions: 90x90x8,6 mm
			Round  19671... 1-module Dimensions: 94,5x94,5x8,4 mm
		  19602 2-module, with claws 19603 2-module, without screws	Classic  19642... 2-module Dimensions: 90x90x8,6 mm
			Round  19672... 2-module Dimensions: 94,5x94,5x8,4 mm
		  19602 2-module, with claws 19603 2-module, without screws	Classic  19652... 2-central-module Dimensions: 122x90x8,6 mm
			Round  19682... 2-central-module Dimensions: 122x90x8,2 mm




Types of mounting

Module	Box	
7	<p>Flush mounting</p>  <p>V71306 For masonry GW 650 °C, light blue V71306.AU GW 960 °C, black</p> <p>V71706 For hollow walls, GW 850 °C, light blue</p>	<p>Table mounting</p>  <p>19787 7-module, grey 19787.B: white</p>
8	<p>Flush mounting</p>  <p>V71318 For masonry GW 650 °C, light blue</p> <p>V71718 For hollow walls, GW 850 °C, light blue</p>	<p>Table mounting</p>  <p>19788 8-module with Classic and Round frame, grey 19788.B: white Dimensions: 141x151,9x135 mm</p>
14 (7+7)	<p>Flush mounting</p>  <p>V71320 For masonry GW 650 °C, light blue</p> <p>V71720 For hollow walls, GW 850 °C, light blue</p>	
21 (7+7+7)	<p>Flush mounting</p>  <p>V71321 For masonry GW 650 °C, light blue</p>	




Types of mounting

Frame	Cover plate*
	<p>Classic</p>  <p>19657... 7-module Dimensions: 210x90x8,6 mm</p>
19617 7-module, with screws	<p>Round</p>  <p>19687... 7-module Dimensions: 210x90x8,5 mm</p>
	<p>Classic</p>
<p>01420 4,3" IP touch screen, grey 01420.B: white 01420.BN: neutral</p> <p>Δ 19558 3,5" monitor, for Due Fili Plus video door system, with built-in 8-module mounting frame</p> <p>Δ 19558.D As above, with function for hearing aid wearers</p> <p>21848.1... Colour touch screen, 4,3" Full Flat Well-contact Plus, with built-in 8-module mounting frame</p> <p>19618 8-module (4+4), with screws</p>	  <p>19668... 8-module Dimensions: 146,5x163x9,3 mm</p> <p>Cover plate rotated at a 90° angle for 21554...</p>
	<p>Round</p>   <p>19698... 8-module Dimensions: 145,5x162x9,5 mm</p> <p>Cover plate rotated at 90° angle for 21554...</p>
19620 14-module (7+7), with screws	<p>Classic</p>  <p>19660... 14-module (7+7) Dimensions: 210x161x8,6 mm</p>
	<p>Classic</p>  <p>19661... 21-module (7+7+7) Dimensions: 206x222x11 mm</p>







British Standard types of mounting

Modules	Boxes
1 and 2	 <p>1-gang mounting box Fixing centres: 60,3 mm</p>
3 and Monobloc	 <p>1-gang mounting box Fixing centres: 60,3 mm</p>
5 and Monobloc	 <p>2-gang mounting box Fixing centres: 120,6 mm</p>



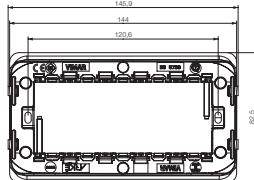
British Standard types of mounting

Frames/Devices	Cover plates*
 19606¹ 1-module, with screws M 3,5, grey  19607¹ 2-module, with screws M 3,5 	 19641... 1-module Dimensions: 90x90x8,6 mm  19642... 2-module Dimensions: 90x90x8,6 mm
 19608¹ 3-module, with screws M 3,5 	  19648... 3-module. For horizontal and vertical mounting. Dimensions: 90x90x8,6 mm
 19215 Example of monobloc device in horizontal mounting  19018.CK Example of monobloc device in vertical mounting 	  19649... 5-module. For horizontal and vertical mounting. Dimensions: 155x90x8,6 mm

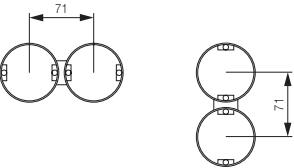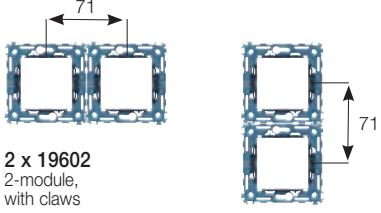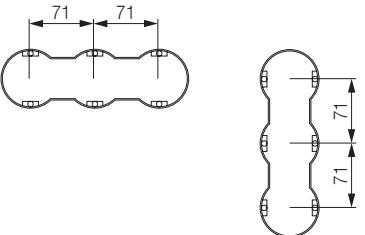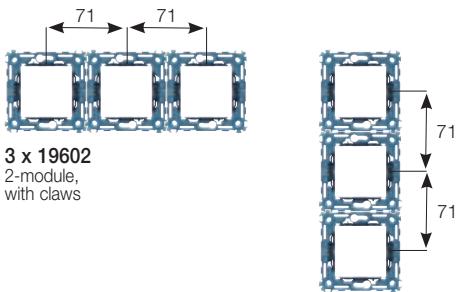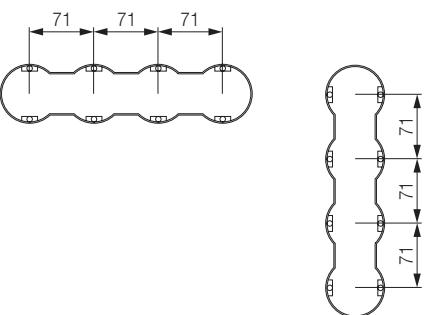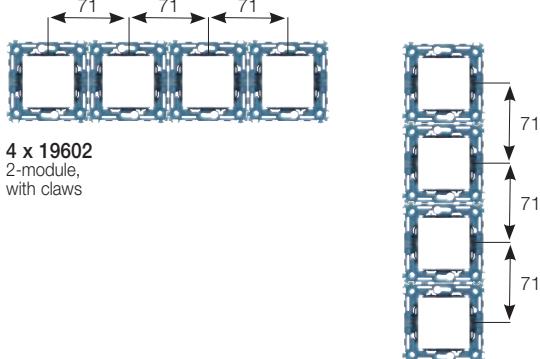71 mm between centres installation

Module	Box	Frame
2+2 71 mm between centres		 2 x 19602 2-module, with claws
2+2+2 71 mm between centres		 3 x 19602 2-module, with claws
2+2+2+2 71 mm between centres		 4 x 19602 2-module, with claws

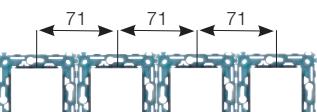71 mm between centres installation

	Cover plate*
 2 x 19603 2-module, without screws	 19643... 4-module (2+2), for horizontal and vertical installation. Dimensions: 161x90 mm
 3 x 19603 2-module, without screws	 19644... 6-module (2+2+2), for horizontal and vertical installation. Dimensions: 232x90 mm
 4 x 19603 2-module, without screws	 19669... 8-module (2+2+2+2), for horizontal and vertical installation. Dimensions: 303x90 mm

Wiring devices.

Catalogue

Plana.

Catalogue section

Control devices	238
Power and signal socket outlets	249
Signalling, protection and detection	260
Comfort and climate	264
Stand alone and hotel solutions	265
Cover plates range	270
Installation types	278

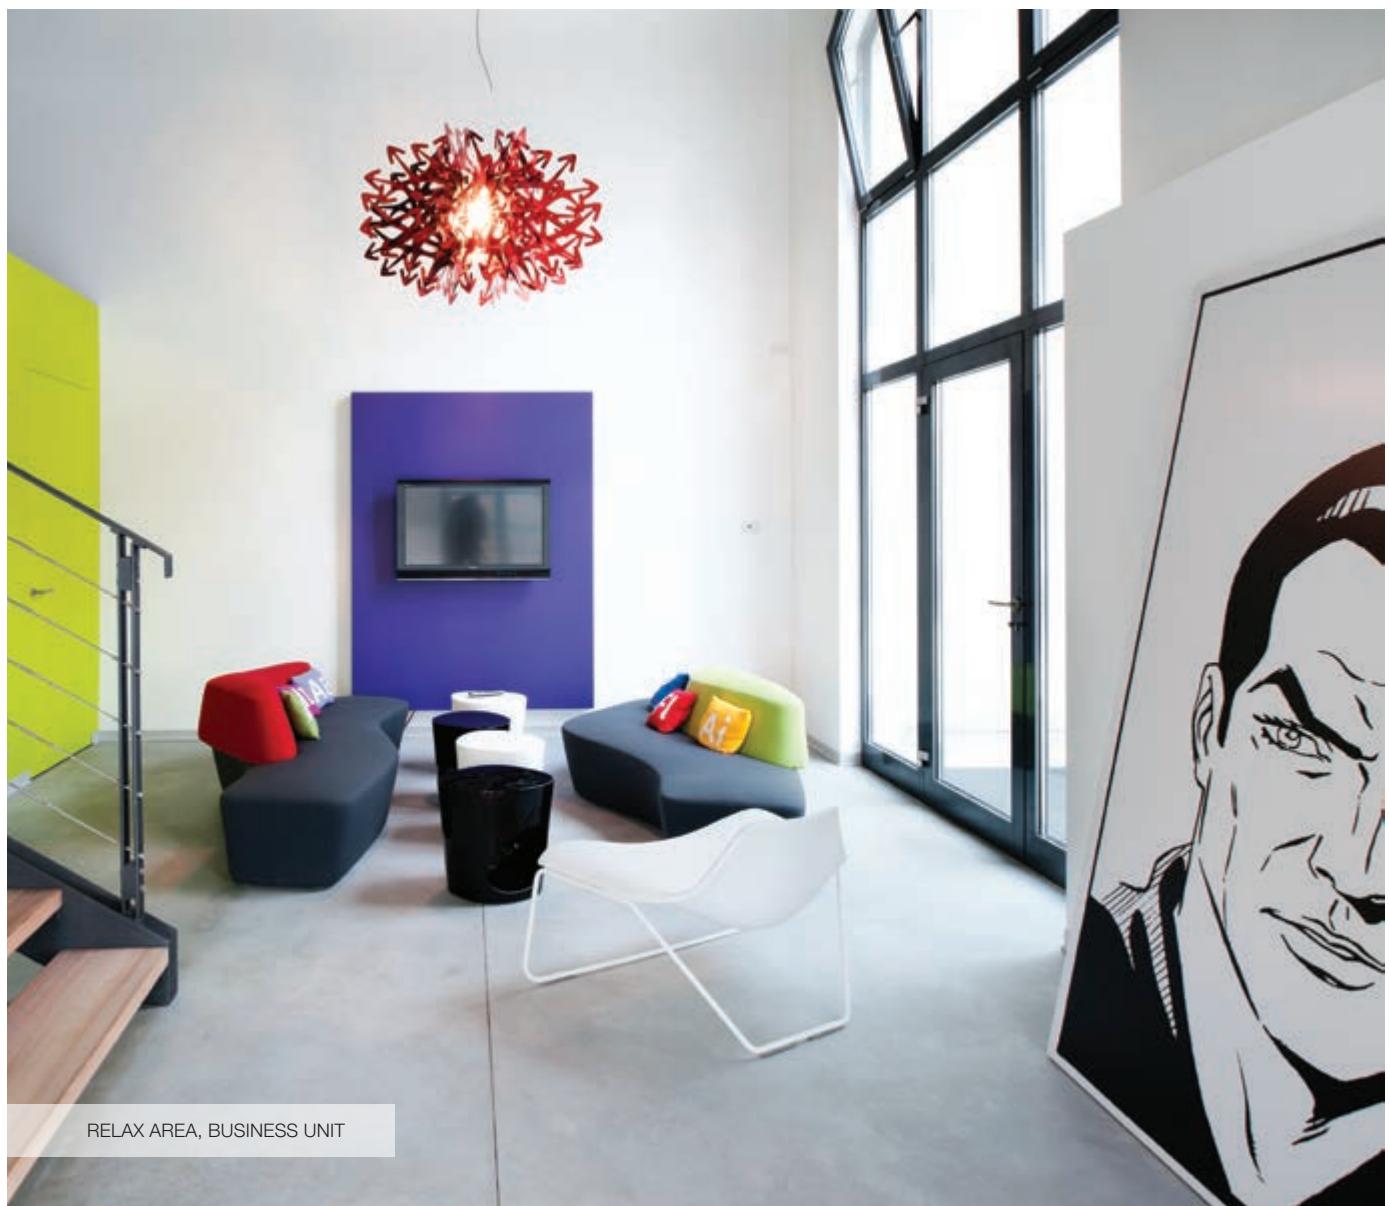
Plana

Essential and linear.
Easily fit into
your projects





CORPORATE OFFICES



Plana

Essential, universal, linear. Providing energy, with maximum linearity: the formal rigour of Plana is ideal for naturally enhancing any environment, with the combined use of intelligent and intuitive technologies. A modern and essential design with a strong character revealed in a versatile range of colours and materials for any combination. Plana's design stands out for its rigorously shaped corners and modest size. Solutions with a strong formal balance, ideal for those seeking a minimalist style. **Delicate buttons in white and elegant glossy silver**, are perfectly coordinated with any cover plate finish, perfectly meeting all installation requirements and adapting to various environments.





RELAX AREA, EXECUTIVE OFFICES

Many surprising colours. The wide and surprising colour range of the Plana cover plates truly has something for everyone - from those who love understated shades to those who prefer brighter colours - creating a natural habitat for everyone's tastes. **37 variants of colours** to choose from: from classical black and white to natural maple and pear woods, from brilliant metallic green and blue to icy cedar and mint, the assortment is endless.





CLASSROOM, INTERNATIONAL SCHOOL

Plana. Resistant, functional and modern materials.

The elegance of metal, the warmth of wood, the modernity of technopolymer and the freshness of Reflex: every interior has its own look, enhanced and emphasised by Plana. Above all through its materials, which give the lighting point the right weight and the most appropriate overtones.

Reflex

Fresh, modern and eclectic, this material gives a special icy effect to its twelve colour variations. Twelve shades, from the deepest, orange and emerald green, to the lightest, mint and amber.



Metal

Aluminium. Brushed aluminium for a natural effect that blends with the latest furnishing trends.

Metal. Painted metal: an elegant and yet at the same time resistant material, in six colours with metallic or pearl finishes.





Icy, shiny, classic for every style. The elegance of metal, the warmth of wood, the modernity of technopolymer and the freshness of Reflex: every room has its own look. First and foremost with its materials and its colours: many variants to satisfy any taste.

Wood

Natural wood. A natural material which gives interiors a peerless warmth.
Three wood finishes: maple, pear and natural cherry.



Technopolymer

High performance with an essential appearance, this material comes in fifteen colour variants, one of which is antibacterial.



Easy solutions to live better. Smart comfort

USB SOCKET OUTLETS

The type A connector has now been supplemented with the type C one, the new technological standard used to power and charge latest-generation devices. Ideal in hotel rooms and offices.

**UNIVERSAL AND RGB DIMMERS**

Used to adjust the brightness of LED and low consumption (CFL) lights and play with the colours of RGB lamps. This way, savings and the right atmosphere can shine as one.




INFRARED 1-WAY SWITCH

Without touching the switches with your hands, the 1-way switch infrared motion sensor turns the lights on and off only when necessary. Or as someone passes or at dusk. Ideal for optimising electricity consumption levels and to avoid contact with the lighting device.


WI-FI ACCESS POINT

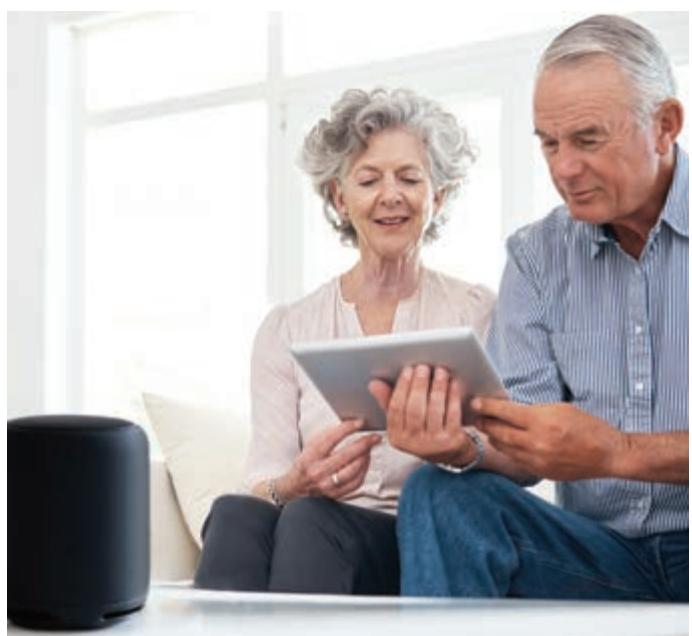The network signal reaches every corner of the house. The ideal solution to extend your Internet connection throughout your home, even to areas that are not reached by the Wi-Fi signal or where the signal is weaker, providing coverage to all rooms.


TOUCH TIMER-THERMOSTAT

For optimum climate control and programmable from smartphone via By-clima app. With RGB backlighting for colour coordinated controls. Temperature and humidity probes are also available.



Easy solutions to live better. Easy safety and security

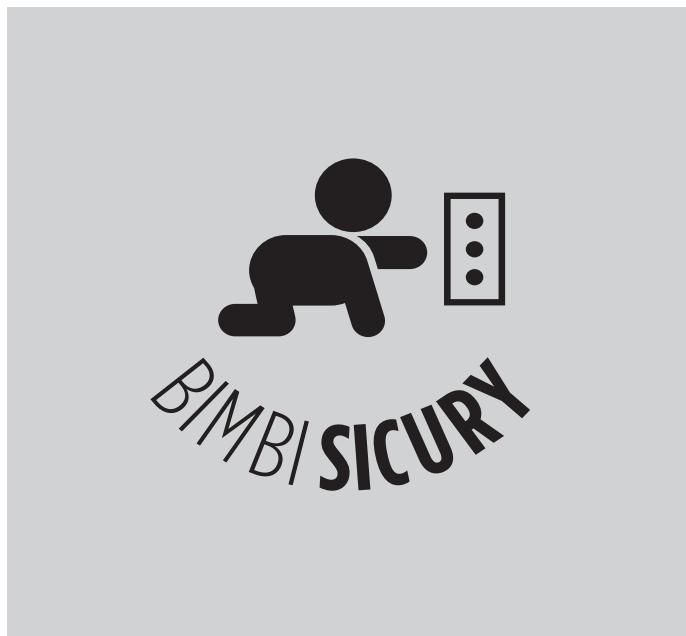
SOCKET OUTLETS WITH SICURY PROTECTIVE SHUTTER

The SICURY safety shutter, which Vimar patented in 1968, is an automatic mechanism that closes the holes in the socket outlet when the plug is removed; this stops foreign bodies from being inserted, preventing accidental contact with live parts.




INTERLOCKED SOCKET

Cuts off the power supply in the event of an overvoltage, to keep people safe.



EMERGENCY LAMP AND GAS DETECTOR

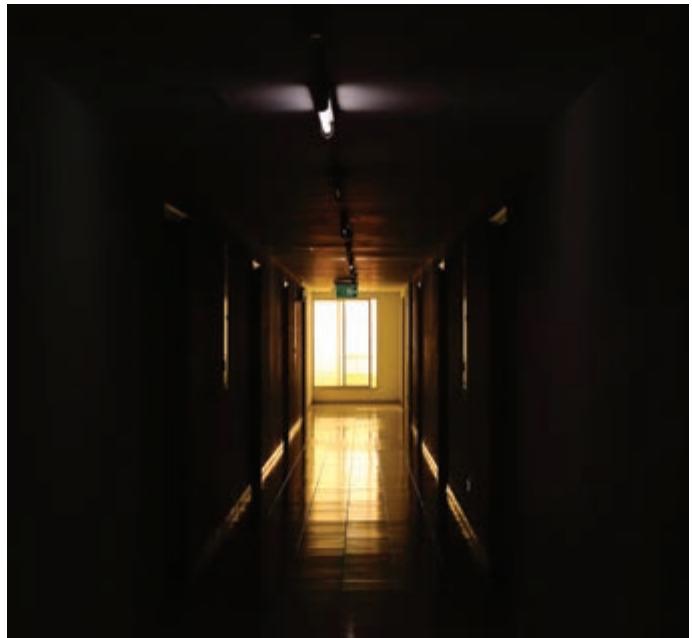The emergency lamp comes on in the event of a blackout to guide you safely in the dark. With a technology hyper-sensitive to gas leaks, the detector reports them, blocks them and describes the fault.



SIGNAL AND MULTIMEDIA SOCKET OUTLETS

Plana enables the connection of electronic devices and the transmission of digital signals through copper or fibre-optic data sockets, telephone socket outlets, USB data ports and RCA and TV-RD-SAT sockets; they all guarantee fast, safe connections to a high quality standard.



SAFE TOUCH. CHOOSE ANTI-BACTERICAL SOLUTIONS

In hospitals, working and public places, hygiene is vital. Technopolymer cover plates and buttons are treated with silver ions to prevent the spread of germs.



ANTIBACTERIAL

REDUCTION OF
90%
OF GROWTH
OF **BACTERIA**



Stand-alone and expandable solutions with a vast range of devices

RADIOFREQUENCY CONTROLS

With no power supply or batteries, they can be mounted on any surface, even wood or glass. No masonry work, there is no need for flush-mounting boxes. Ideal for renovations, redevelopments and updates, or any installations which have regulatory or architectural constraints.



LISTEN TO MUSIC

The Bluetooth wireless technology receiver incorporated in the 4+4 W amplifier exploits the Bluetooth technology on your smartphone to connect quickly to your home stereo system or, on holiday, the system in your hotel room.



BY-ALARM BURGLAR ALARM SYSTEM

By-alarm can be integrated both with the **By-me Plus home automation system** which, through an IP interface, guarantees a secure and protected connection, locally and remotely and with the wide range of products of **Elvox CCTV**. The versatility and scalability, combined with high technology and simplicity of use, makes them suitable for small apartments as well as shopping malls and business centres, up to large industrial companies.



QUID FOR LIGHTING CONTROL

An innovative magnetic relay that connects the silence of traditional electronic devices to the reliability of the electromechanical ones. It introduces new evolved functions, like the opportunity of centralizing the lighting out with just a gesture and with only one cable. Furthermore, the presence of a pilot light reveals if the lighting is active in any other connected point.



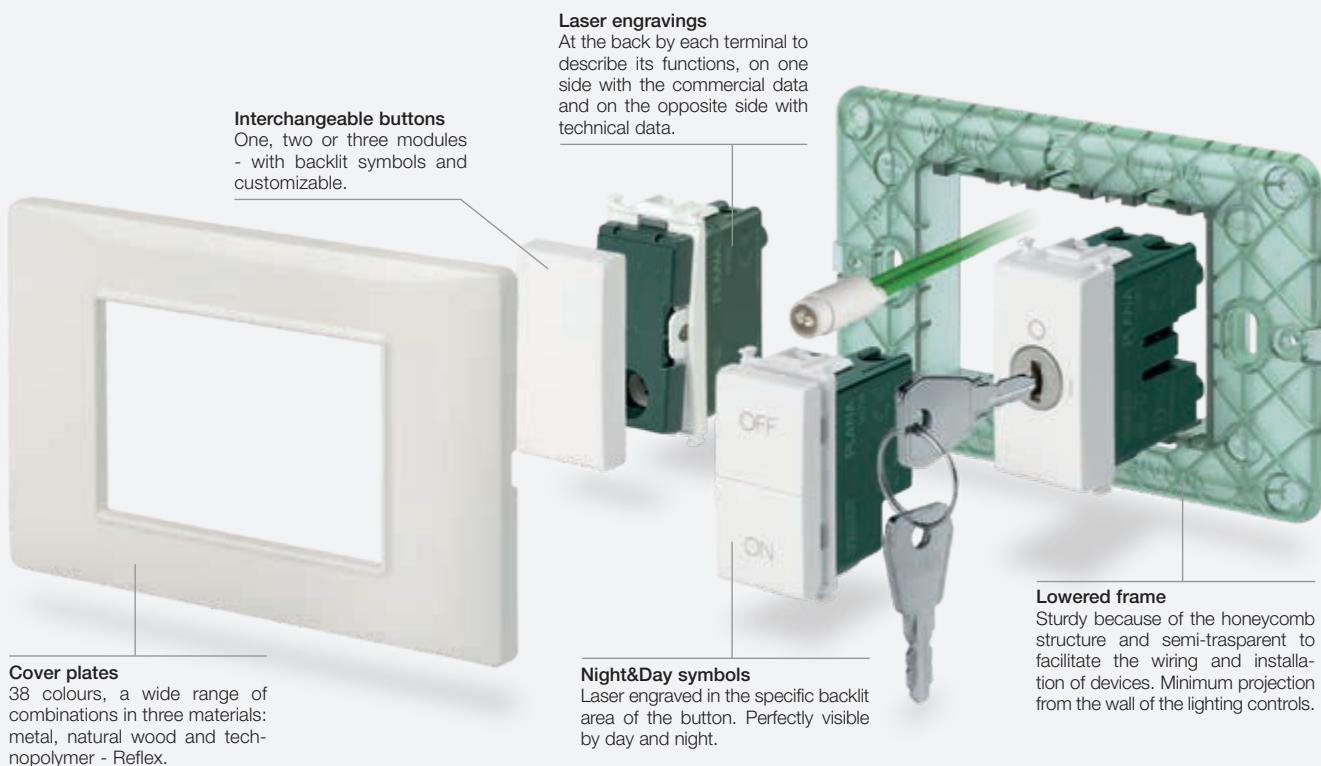
QUID FOR ROLLER SHUTTERS CONTROL

This new switch offers the possibility of automating curtains or roller shutters and enabling group control, disconnecting the load at the end of the activation and memorizing the favourite position and the user can recall it whenever he wants. A performing solution created in the name of functionality and comfort.



Mounting features

3-module installation




Plak-clack® fixing



SCREWLESS TERMINALS

For solid, stranded and flexible cables. Quick, easy and safe.

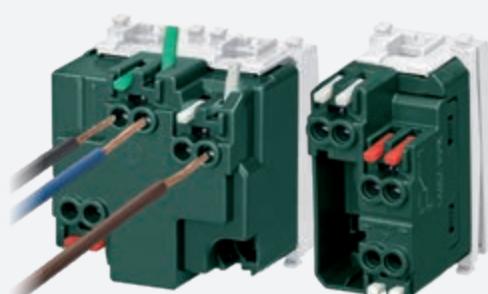The quick-wiring terminals can hold rigid, semi-rigid and flexible cables, responding to all installation needs. Secure fastening is assured for both signal circuit cables with cross-section 0,5-2,5 mm² and power circuit cables with cross-section 1,5-2,5 mm².






SCREW TERMINALS

Ergonomic contacts.

The metal plate in the terminals is curved: a Vimar refinement allowing the wire to be held in place until clamped with the screw. Secure fastening is assured for both signal circuit cables with cross-section 0,5-2,5 mm² and power circuit cables with cross-section 1,5-2,5 mm².




Composition	Boxes	Frames	Devices	Cover plates
	 Flush mounting	 With screws	 1 module	 From 1 to 2 modules*
 From 1 to 2 modules	 Flush mounting  Surface mounting	 2-module with/without screws or with claws	 1 x 2 modules  2 x 1 module	 From 1 to 2 modules*
 For 2 central modules	 Flush mounting  Surface mounting	 With screws	 2 x 1 module  1 x 2 modules  1 and 2 modules  3 x 1 module  1 x 3 modules	 2 central modules*
 From 3 to 7 modules		 With screws		 From 3 to 7 modules*
 8 modules	 Flush mounting	 4,3" touch screen "Energy"  With screws	 8 modules  2 x 1 module and 1 x 2 modules  4 x 1 module  1 and 2 modules	
 Table mounting	 Table box	 With screws		 4 and 7 modules*

* For other combinations, see the installation types from page 278





Mounting features for British standard

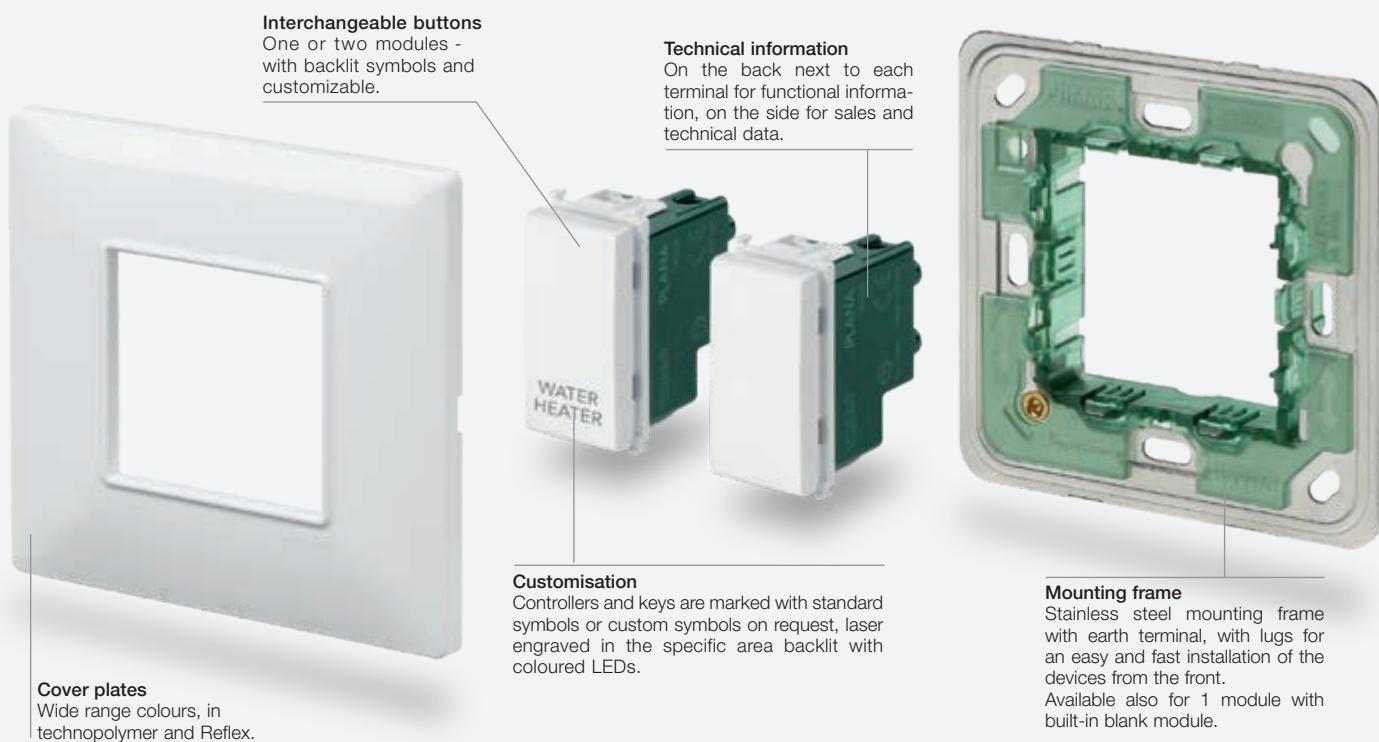Modular devices mounting



Monobloc device (with built-in mounting frame)













Composition	Box	Frame	Device	Cover plate
 1 module, modular mounting (1-gang)	 1-gang mounting box Fixing centres: 60,3 mm	 1-module with screws M 3,5	 1-gang switch, 1 module	 1 module*
 2 modules, modular mounting (1-, 2-, 3-gang switch)	 1-gang mounting box Fixing centres: 60,3 mm	 2-module with screws M 3,5	 3-gang switch, 2 modules  Two 1-gang switches, 1 module  1-gang switch, 2 modules	 2 modules*
 monobloc device or 3 modules modular mounting	 1-gang mounting box Fixing centres: 60,3 mm	 3-module with screws M 3,5	 Socket outlet monobloc device  ON/OFF unit monobloc device  1 x 2 modules + 1 x 1 module	 Monobloc horizontal mounting*
 monobloc device or 5 modules modular mounting	 2-gang mounting box Fixing centres: 120,6 mm	 5-module with screws M 3,5	 2-gang switched socket outlets monobloc device  2 x 2 modules + 1 x 1 module (blank module)	 5 modules*

* For other combinations, see the installation types from page 281

Mounting features

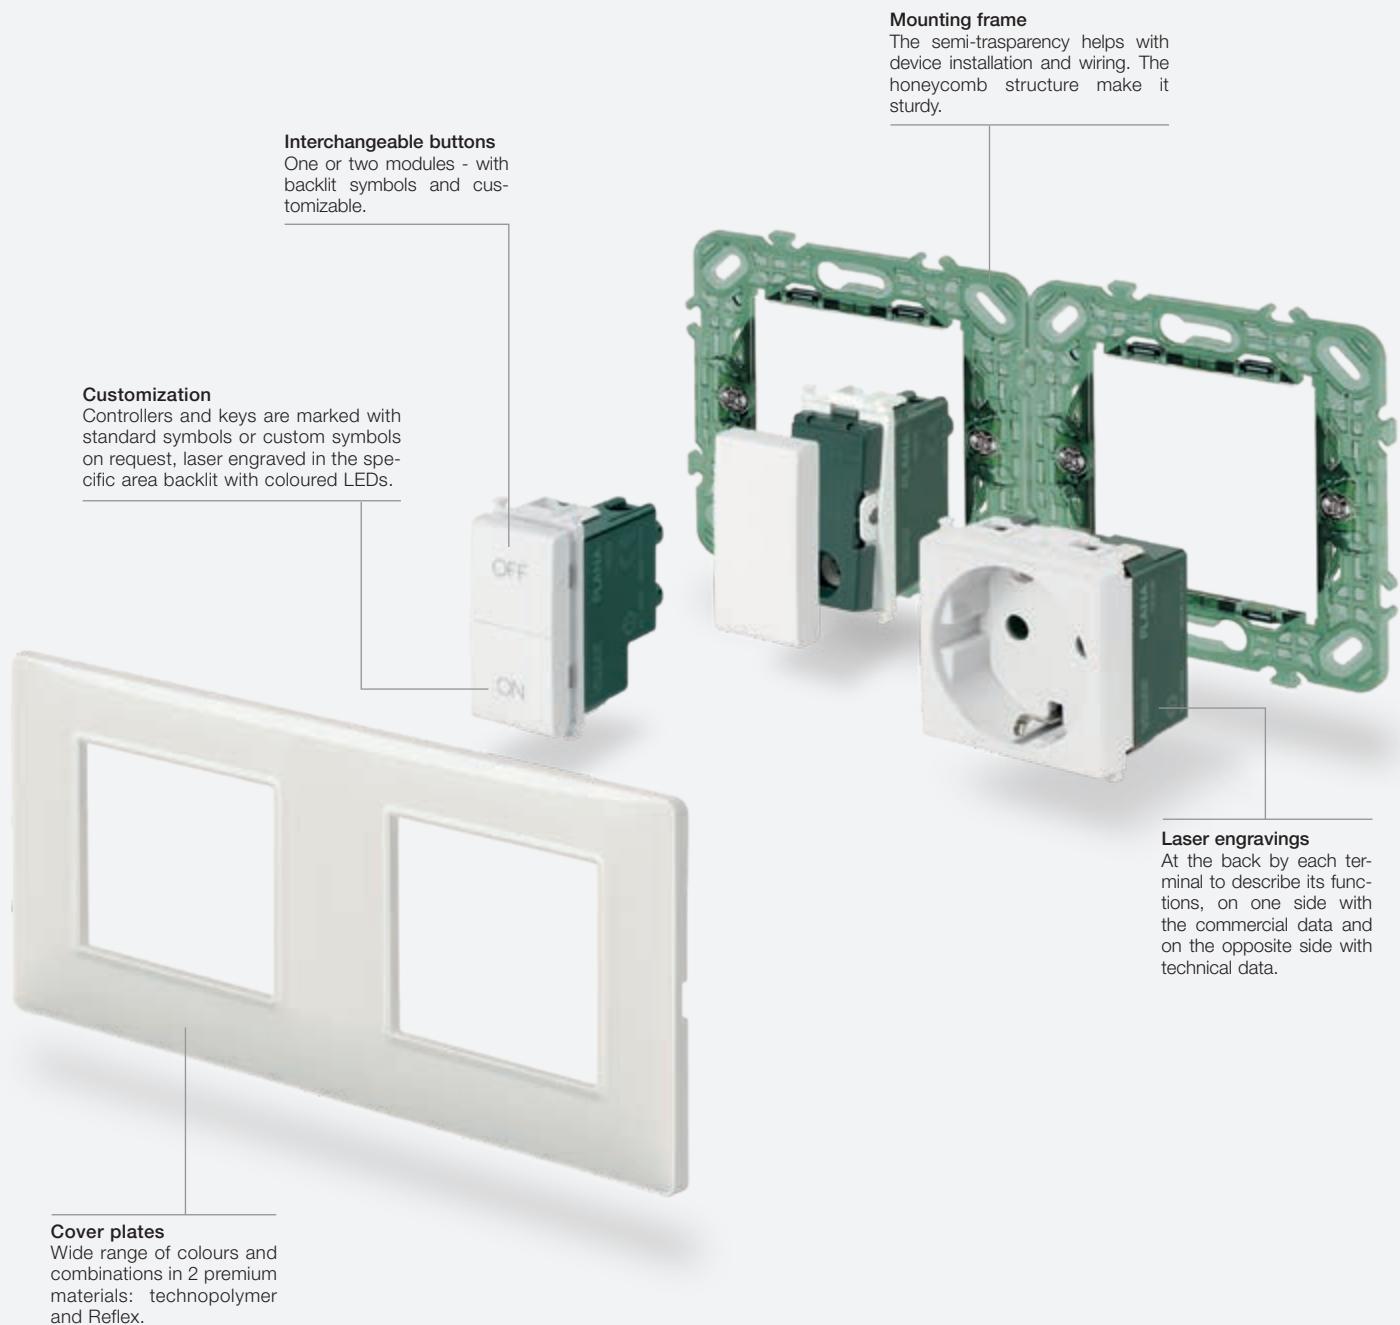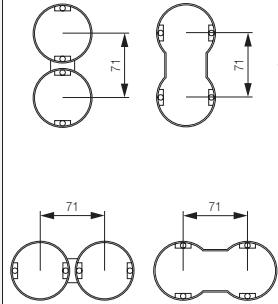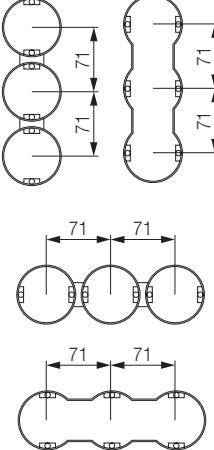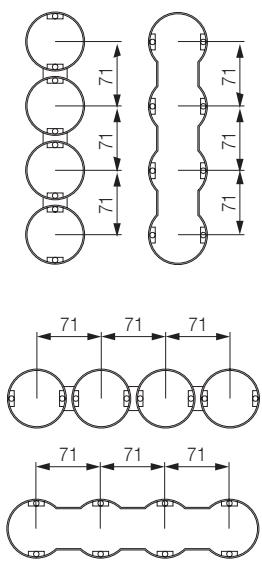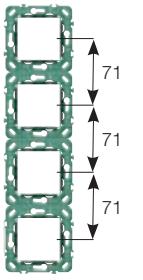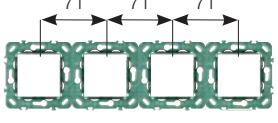Ø 60 mm, Ø 65x65 mm and 71 mm between centres
(German and French standards)



Composition	Box	Frame	Device	Cover plate
 2 modules, ø 60 and 65 mm mounting box			1-gang switch, 2 modules	
 2+2 modules, 71 mm between centres			2 x 2 modules in vertical	
 2+2+2 modules, 71 mm between centres			3 x 2 modules in vertical	
 2+2+2+2 modules, 71 mm between centres			4 x 2 modules in vertical	
			4 x 2 modules in horizontal	

* For other combinations, see the installation types from page 282

Mounting features

Ø 60 mm, Ø 65x65 mm and 57 mm between centres
(French standard)



Cover plates

Wide range of colours and combinations in 3 premium materials: metal, natural wood and technopolymer - Reflex.

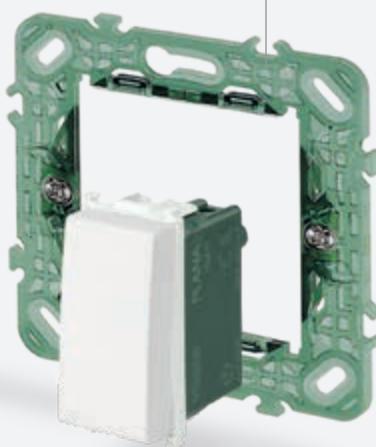
Interchangeable buttons

One or two modules - with backlit symbols and customizable.








Customization

Controllers and keys are marked with standard symbols or custom symbols on request, laser engraved in the specific area backlit with coloured LEDs.



Mounting frame

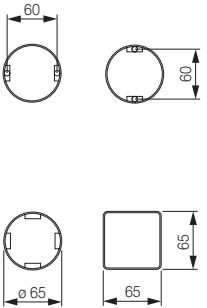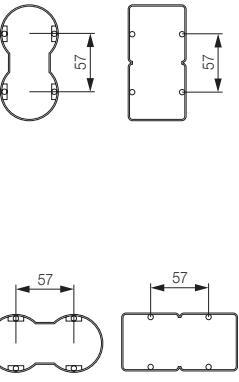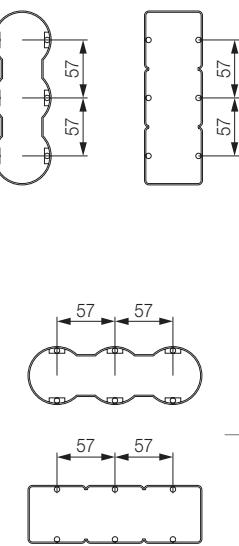The semi-transparency helps with device installation and wiring. The honeycomb structure make it sturdy.

Composition	Box	Frame	Device	Cover plate
 2 modules, ø 60 and 65 mm mounting box				
 2 + 2 modules, 57 mm between centres				
 2 + 2 + 2 modules, 57 mm between centres				
				

* For other combinations, see the installation types from page 282

Devices

White

Silver

Blank modules and cable outlets



14041
Blank module
14041.AB
As above,
antibacterial
treatment.
Depth:
10 mm



14044
Cable outlet.
Depth:
19,5 mm



14041.SL
Blank module
14042.SL
Blank module
- 2 modules.
Depth: 10 mm



14044.SL
Cable outlet.
Depth:
19,5 mm



14046²
Cable outlet +
terminalbar 20 A.
Depth: 22,1 mm



14047²
45 A 1-gang cable outlet
supplied with cover plate.
Depth: 20 mm



14049³
13 A, 1-gang, switched
and fused connection unit.
Depth: 20,4 mm



14046.SL²
Cable outlet +
terminalbar 20 A.
Depth: 22,1 mm



14047.SL²
45 A 1-gang cable outlet
supplied with cover plate.
Depth: 20 mm



14049.SL³
13 A, 1-gang, switched
and fused connection unit.
Depth: 20,4 mm

1P 1-way switches 250 V~ (lightable°)



14000
10 AX
14001
16 AX
14001.AB
As above,
antibacterial
treatment.
Depth:
24 mm



14000.SL
10 AX
14001.SL
16 AX.
Depth:
24 mm



14002
20 AX.
Depth:
24 mm



14003
20 AX, 3-gang
- 2 modules.
Depth: 24 mm



14002.SL
20 AX.
Depth:
24 mm

14002.2.SL
20 AX,
- 2 modules.
Depth: 24 mm



14003.SL
20 AX, 3-gang
- 2 modules.
Depth: 24 mm

1P 1-way switches 250 V~, screwless terminals (lightable°)





14000.FX
10 AX
△ 14001.FX
16 AX.
Depth:
25,7 mm



14000.FX.SL
10 AX
△ 14001.FX.SL
16 AX.
Depth:
25,7 mm

14000.FX.2.SL
10 AX - 2 modules
16 AX - 2 modules.
Depth: 25,7 mm

Devices

White	Silver
2P 1-way switches 250 V~ (lightable[°])	
 14015 16 AX 14015.AB As above, antibacterial treatment. Depth: 24 mm	 14015.2 16 AX, - 2 modules. Depth: 24 mm
 14015.SL 16 AX. Depth: 24 mm	 14015.2.SL 16 AX, - 2 modules. Depth: 24 mm
2P 1-way switches 250 V~ (lightable[°])	
 14016 20 AX. Depth: 24 mm	 14016.2 20 AX, ON/OFF, - 2 modules. Depth: 24 mm
 14016.WH 20 AX, Water/Heater. Depth: 24 mm	 14016.2.WH 20 AX, Water/Heater. - 2 modules. Depth: 24 mm
 14016.SL 20 AX. Depth: 24 mm	 14016.2.SL 20 AX, ON/OFF, - 2 modules. Depth: 24 mm
 14016.WH.SL 20 AX, Water/Heater. Depth: 24 mm	 14016.2.WH.SL 20 AX, Water/Heater. - 2 modules. Depth: 24 mm
 14017 32 A, 1-gang, ON/OFF. Depth: 22,5 mm	 14017.WH 32 A, 1-gang, Water/Heater. Depth: 22,5 mm
 14017.SL 32 A, 1-gang, ON/OFF. Depth: 22,5 mm	 14017.WH.SL 32 A, 1-gang, Water/Heater. Depth: 22,5 mm
 14018 45 A, 1-gang, ON/OFF. Depth: 22,5 mm	 14018.CK 45 A, 1-gang, cooker unit. Depth: 22,5 mm
 14018.SL 45 A, 1-gang, ON/OFF. Depth: 22,5 mm	 14018.CK.SL 45 A, 1-gang, cooker unit. Depth: 22,5 mm

Devices

White

Silver

2P 1-way switches 250 V~ (lightable°)



14019
45 A, 1-gang, ON/OFF
for 2-gang boxes.
Depth: 22,5 mm



14019.CK
45 A, 1-gang, cooker
unit for 2-gang boxes.
Depth: 22,5 mm



14019.SL
45 A, 1-gang, ON/OFF
for 2-gang boxes.
Depth: 22,5 mm



14019.CK.SL
45 A, 1-gang, cooker
unit for 2-gang boxes.
Depth: 22,5 mm

Badge switch (lightable°)



14466
Badge switch.
Depth: 27,4 mm



14466.SL
Badge switch.
Depth: 27,4 mm

1P 2-way switches 250 V~ (lightable°)



14004
10 AX
14005
16 AX
14005.AB
As above,
antibacterial
treatment.
Depth:
24 mm



14004.2
10 AX,
- 2 modules



14004.SL
10 AX
14005.SL
16 AX.
Depth:
24 mm



14004.2.SL
10 AX,
- 2 modules
14005.2.SL
16 AX,
- 2 modules.
Depth:
24 mm

1P 2-way switches 250 V~, screwless terminals (lightable°)



14004.FX
10 AX
Δ 14005.FX
16 AX.
Depth:
25,7 mm



14004.FX.2
10 AX,
- 2 modules
Δ 14005.FX.2
16 AX,
- 2 modules.
Depth: 25,7 mm



14004.FX.SL
10 AX
Δ 14005.FX.SL
16 AX.
Depth:
25,7 mm



14004.FX.2.SL
10 AX,
- 2 modules
Δ 14005.FX.2.SL
16 AX,
- 2 modules.
Depth: 25,7 mm

1P 2-way switches 250 V~ (lightable°)



14006
20 AX.
Depth:
24 mm



14006.2
20 AX,
- 2 modules.
Depth: 24 mm



14007
20 AX, 3-gang
- 2 modules.
Depth: 30,6 mm



14006.SL
20 AX.
Depth:
24 mm



14006.2.SL
20 AX,
- 2 modules.
Depth: 24 mm



14007.SL
20 AX, 3-gang
- 2 modules.
Depth: 30,6 mm

* Not to be used in European Countries

▲ New article

Δ Available until stocks last

Devices

White

Silver

View Wireless connected 2-way switches

**14592.0**

Mechanism, 100-240 V 50/60 Hz output relay for 500 W incandescent lamps, 100 W LED lamps, 250 VA electronic transformers, 60 W fluorescent lamps, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, 1 input for actuator push button or recall a scenario. To complete with 1-, 2- or 3-module buttons. Depth: 36,5 mm



1P reversing switches 250 V~ (lightable°)

**14013**

16 AX

14013.AB
 As above,
 antibacterial
 treatment.
 Depth:
 24 mm
14013.216 AX,
- 2 modules.Depth:
24 mm**14013.SL**16 AX.
Depth:
24 mm**14013.2.SL**16 AX,
- 2 modules.
Depth:
24 mm

1P reversing switches 250 V~, screwless terminals (lightable°)

**14009.FX**10 AX.
Depth:
27,7 mm**14009.FX.2**10 AX
- 2 modules.
Depth: 27,7 mm**14009.FX.SL**10 AX.
Depth:
27,7 mm**14009.FX.2.SL**10 AX
- 2 modules.
Depth: 27,7 mm

1P NO push buttons 250 V~ (lightable°)

**14008**10 A
- 2 modules.
14008.AB
 As above,
 antibacterial
 treatment.
 Depth: 24 mm
14008.210 A
- 2 modules.

Depth: 24 mm


14008.2.C
 10 A, bell symbol
- 2 modules.
Depth: 24 mm

14008.2.L
 10 A, light symbol
- 2 modules.
Depth: 24 mm
**14008.SL**10 A.
Depth:
24 mm**14008.2.SL**10 A
- 2 modules.
Depth: 24 mm**14008.2.C.SL**10 A, bell symbol
- 2 modules.
Depth: 24 mm**14008.2.L.SL**10 A, light symbol
- 2 modules.
Depth: 24 mm

1P NO push buttons 250 V~, screwless terminals (lightable°)

**14008.FX**10 A.
Depth:
25,7 mm**14008.FX.2**10 A
- 2 modules.
Depth: 25,7 mm**14008.FX.SL**10 A.
Depth:
25,7 mm**14008.FX.2.SL**10 A
- 2 modules.
Depth: 25,7 mm

Devices

White

Silver

1P NC push buttons 250 V~ (lightable°)



14010
10 A.
Depth: 24 mm



14010.SL
10 A.
Depth: 24 mm

Quid - Magnetic relay module for lighting (backfit)



03991
ON/OFF sequence pulse relay module, 1 input for NO push button, 1 NO 10 A 220-240 V~ 50/60 Hz relay output, for backfit



03992
ON/OFF sequence pulse relay module, 1 input for NO push button, 1 input for reset push button, 1 NO 10 A 220-240 V~ 50/60 Hz relay output, luminous signalling of load status, for backfit



03993
ON/OFF sequence pulse relay module, 1 input for NO push button, 2 NO 10 A 220-240 V~ 50/60 Hz sequence relay outputs, for backfit



00932
Pre-wired LED unit for signalling the load status, for 03992, supply voltage 220-240 V~ 50/60 Hz, 0,5 W, green

Lightable° mechanisms 250 V~ (common devices for the two versions)



14000.0
1P 10 AX
1-way switch.
Depth: 24 mm



14001.0
1P 16 AX
1-way switch.
Depth: 24 mm



14015.0
2P 16 AX
1-way switch.
Depth: 24 mm



14004.0
1P 10 AX
2-way switch.
Depth: 24 mm



14005.0
1P 16 AX
2-way switch.
Depth: 24 mm



14013.0
1P 16 AX
reversing switch.
Depth: 24 mm



14008.0
1P NO 10 A
push button.
Depth: 24 mm



14010.0
1P NC 10 A
push button.
Depth: 24 mm



14002.0
1P 20 AX
1-way switch.
Depth: 24 mm



14016.0
2P 20 AX
1-way switch.
Depth: 24 mm



14006.0
1P 20 AX
2-way switch.
Depth: 24 mm

Lightable° mechanisms 250 V~, screwless terminals (common devices for the two versions)



14000.FX.0
1P 10 AX
1-way switch.
Depth: 25,7 mm



14001.FX.0
1P 16 AX
1-way switch.
Depth: 25,7 mm



14004.FX.0
1P 10 AX
2-way switch.
Depth: 25,7 mm



14005.FX.0
1P 16 AX
2-way switch.
Depth: 25,7 mm



14009.FX.0
1P 10 AX
reversing switch.
Depth: 27,7 mm



14008.FX.0
1P NO 10 A
push button.
Depth: 25,7 mm

Devices

White	Silver
1-module interchangeable buttons (lightable°)	
 14021 No symbol	 14021.G Customizable
 14026 With diffuser	 14026.DND Do Not Disturb, with diffuser
 14021.SL No symbol	 14021.G.SL Customizable
 14026.PLS Please Clean, with diffuser	 14026.PLS.SL Please Clean, with diffuser
 14029 With name- plate	 14029.SL With name- plate
 14021.C Bell symbol	 14021.L Light symbol
 14021.PSL Key symbol	 14021.99 O I symbols for DP switches
 14021.99.SL O I symbols for DP switches	 14021.PSL 'Press' marked
2-module interchangeable buttons (lightable°)	
 14022 No symbol	 14022.AB No symbol, antibacterial treatment
 14022.G Customizable	 14027 With diffuser
 14022.SL No symbol	 14022.G.SL Customizable
 14022.C Bell symbol	 14022.C.SL Bell symbol
 14022.L Light symbol	 14022.L.SL Light symbol
 14022.P Key symbol	 14022.P.SL Key symbol
 14022.99 O I symbols for 14015.0 switches	 14022.99.SL O I symbols for 14015.0 switches
 14022.PS 'Press' marked	 14022.PS.SL 'Press' marked

Devices

White

Silver

3-module interchangeable buttons 250 V~ (lightable°)

14023
No symbol14023.G
Customizable14023.SL
No symbol14023.G.SL
Customizable14028
With diffuser14023.C
Bell symbol14028.SL
With diffuser14023.C.SL
Bell symbol

1P special switches 250 V~

14052
NO 10 A,
cord-operated.
Depth: 24 mm
antibacterial
treatment.
Depth: 24 mm14052.AB
NO 10 A,
cord-operated.
Depth: 24 mm
antibacterial
treatment.
Depth: 24 mm14053
NC 10 A,
cord-operated.
Depth: 24 mm14052.SL
NO 10 A,
cord-operated.
Depth: 24 mm14053.SL
NC 10 A,
cord-operated.
Depth: 24 mm14050
NO 10 A, with
lightable name-plate
- 2 modules.
Depth: 24 mm

Additional 1P switches 250 V~

14056.33
10 A, NO+
NC-contact,
OFF symbol.
Depth:
28 mm14056.34
10 A, NO+
NC-contact,
ON symbol.
Depth:
28 mm14058
Two 10 A NO+NC
independent contacts,
OFF/ON symbols.
Depth: 28 mm14056.33.SL
10 A, NO+
NC-contact,
OFF symbol.
Depth:
28 mm14056.34.SL
10 A, NO+
NC-contact,
ON symbol.
Depth:
28 mm14058.SL
Two 10 A NO+NC
independent contacts,
OFF/ON symbols.
Depth: 28 mm

1P NO 10 A push buttons 250 V~

14066
Two NO 10 A,
independents.
Depth: 28 mm14068.B
With white diffuser
(for signalling unit).
Depth: 28 mm14066.SL
Two NO 10 A,
independents.
Depth: 28 mm14068.B.SL
With white diffuser
(for signalling unit).
Depth: 28 mm

Devices


White	Silver
Switches 250 V~	
 14060 2P 10 AX 2-way switch, OFF-central. Depth: 32,5 mm	 14062 1P NO 10 A 2-gang push buttons, interlocked. Depth: 28 mm
 14060.SL 2P 10 AX 2-way switch, OFF-central. Depth: 32,5 mm	 14062.SL 1P NO 10 A 2-gang push buttons, interlocked. Depth: 28 mm
Quid - Electronic 2-way switch for roller shutter	
 14196 Slat orientation, with relay outputs for cosφ 0,6 motor 2 A 220-240 V~ 50/60 Hz, position saving. Depth: 40,5 mm	 14196.SL Slat orientation, with relay outputs for cosφ 0,6 motor 2 A 220-240 V~ 50/60 Hz, position saving. Depth: 40,5 mm
Quid - Electronic relay module and control unit module for roller shutters (backfit)	
 03996 Centralizable relay module, slat orientation, with relay outputs for cosφ 0,6 motor 2 A 220-240 V~ 50/60 Hz, position saving, for backfit or junction boxes installation	 03997 control unit module, 2 inputs for NO push button, 6 outputs for Quid roller shutter relay module (03996), 220-240 V~ 50/60 Hz power supply, for backfit or junction boxes installation
View Wireless connected control device for roller shutter	
 14594.0 Control device for 1 roller shutter with slat orientation and change-over relay output for cosφ 0,6 motor 2 A 100-240 V~ 50/60 Hz, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, 1 input for external push button to recall a scenario, favourite position recall function. To complete with 2 1-module half-button. Depth: 36,5 mm	 Bluetooth®  zigbee <small>certified product</small>
 14755.2 2 1-module interchangeable half-button, arrows symbol	 14755.2.SL 2 1-module interchangeable half-button, arrows symbol
2P key-operated switches 250 V~ (add .CU to the basic code for switches with 000 unified key)	
 14083 16 AX 1-way switch. Depth: 30,5 mm	 14083.SL 16 AX 1-way switch. Depth: 30,5 mm
 14083.SSL 16 AX 1-way switch, key removable in "O" (OFF) position. Depth: 30,5 mm	 14087 NO 16 A push button. Depth: 30,5 mm
 14083.SL 16 AX 1-way switch. Depth: 30,5 mm	 14083.SSL 16 AX 1-way switch, key removable in "O" (OFF) position. Depth: 30,5 mm
 14087.SL NO 16 A push button. Depth: 30,5 mm	

Devices

White

Silver

Dimmers**

						
14135.1 MASTER, universal 14135.1.120 As above, 120 V~. Depth: 40,5 mm	14136.1 MASTER, universal, with potentiometer. Depth: 40,5 mm	14136.AB.1 MASTER, universal, with potentiometer, antibacterial treatment. Depth: 40,5 mm	14138 RGB, with potentiometer Depth: 40,5 mm	14135.1.SL MASTER, universal 14135.1.120.SL As above, 120 V~. Depth: 40,5 mm	14136.1.SL MASTER, universal, with potentiometer. Depth: 40,5 mm	14138.SL RGB, with potentiometer Depth: 40,5 mm
						
14139 FADING-SHOW, with potentiometer Depth: 40,5 mm	14150 100-500 W, potentiometer, 230 V~. Depth: 39 mm	14153 100-500 W push-push + potentiometer, 230 V~. Depth: 39 mm	Δ*14146 60-900 W 60-300 VA, potentiometer, 230 V~. Depth: 39 mm	14139.SL FADING-SHOW, with potentiometer Depth: 40,5 mm	14150.SL 100-500 W, potentiometer, 230 V~. Depth: 39 mm	14153.SL 100-500 W push-push + potentiometer, 230 V~. Depth: 39 mm
						
14147 30-500 W 30-300 VA, potentiometer, 120 V~. Depth: 39 mm	*14148 MASTER, 800 W/500 VA, 120-230 V~. Depth: 40,5 mm	Δ 14165 MASTER, 500 W 230 V~ - 2 modules. For incandescent lamps and ferromagnetic transformers. Depth: 32,5 mm	14147.SL 30-500 W 30-300 VA, potentiometer, 120 V~. Depth: 39 mm	*14148.SL MASTER, 800 W/500 VA, 120-230 V~. Depth: 40,5 mm	Δ 14165.SL MASTER, 500 W 230 V~ - 2 modules. For incandescent lamps and ferromagnetic transformers. Depth: 32,5 mm	

Dimmer - controllable loads

Type DIMMER LOADS	UNIVERSAL							
	14135.1				14136.1 - 14136.AB.1			
	2-wire connection		3-wire connection		2-wire connection		3-wire connection	
	LE	TE	LE	TE	LE	TE	LE	TE
Incandescence	40 ÷ 400 W	40 ÷ 300 W	40 ÷ 400 W	40 ÷ 300 W	40 ÷ 400 W	40 ÷ 300 W	40 ÷ 400 W	40 ÷ 300 W
Compact fluorescent lamps (CFL)	10 ÷ 100 W max 5 lamps	10 ÷ 200 W max 10 lamps	10 ÷ 100 W max 5 lamps	10 ÷ 200 W max 10 lamps	10 ÷ 100 W max 5 lamps	10 ÷ 200 W max 10 lamps	10 ÷ 100 W max 5 lamps	10 ÷ 200 W max 10 lamps
LED	5 ÷ 100 W max 10 lamps	5 ÷ 200 W max 20 lamps	3 ÷ 100 W max 10 lamps	3 ÷ 200 W max 20 lamps	5 ÷ 100 W max 10 lamps	5 ÷ 200 W max 20 lamps	3 ÷ 100 W max 10 lamps	3 ÷ 200 W max 20 lamps
Electronic transformers for halogen	40 ÷ 300 VA max 3 transformers type 	40 ÷ 300 VA max 5 transformers type 	40 ÷ 300 VA max 3 transformers type 	40 ÷ 300 VA max 5 transformers type 	40 ÷ 300 VA max 3 transformers type 	40 ÷ 300 VA max 5 transformers type 	40 ÷ 300 VA max 3 transformers type 	40 ÷ 300 VA max 5 transformers type 
Supply units for LED (arts. 01874, 01875)			max 10 units	NOT useful			max 10 units	NOT useful
Step marker lamps (art. 02662)			max 10 lamps	NOT useful			max 10 lamps	NOT useful
Type DIMMER LOADS	RGB				FADING-SHOW			
	14138				14139			
	max 10 units				max 10 units			
RGB supply units (art. 01876)	max 10 units				max 10 lamps			
RGB lamps (art. 02663)	max 10 lamps				max 10 lamps			

Devices

White

Silver

Dimmer - controllable loads

Type	DIMMER LOADS	STANDARD		
		14150 (with rotary potentiometer)	14153 (with push-push switch and rotary potentiometer control)	14146 (with rotary potentiometer)
Incandescence	100 - 500 W	100 - 500 W		60 - 900 W
Ferromagnetic Transformers				40 - 500 VA at 50 Hz 40 - 400 VA at 60 Hz
Electronic transformers for extra low-voltage halogen lamps				40 - 500 VA at 50 Hz 40 - 400 VA at 60 Hz
				60 - 300 VA 230 V~, 50/60 Hz

Electronic supply unit



01874
230 V~ 50 Hz, for controllable LED lamps, 12-24 Vdc
Δ 01874.120
As above, 120 V~



01875
230 V~ 50 Hz, for controllable LED lamps, 350/500/700 mA
Δ 01875.120
As above, 120 V~



01876
230 V~ 50 Hz, for controllable LED RGB lamps, 12-24 Vdc
Δ 01876.120
As above, 120 V~

Infrared switches



Δ 14172
Receiver, NO 6 A 230 V~, relay output 50/60 Hz. Depth: 36 mm



Δ 14173
Receiver, 4 A 230 V~ relay outputs, for rolling shutters - 2 modules. Depth: 36 mm



Δ 14175
Receiver, 40-450 W/V/A dimmer, 230 V~. Depth: 40,5 mm



Δ 14172.SL
Receiver, NO 6 A 230 V~, relay output 50/60 Hz. Depth: 36 mm



Δ 14173.SL
Receiver, 4 A 230 V~ relay outputs, for rolling shutters - 2 modules. Depth: 36 mm



Δ 14175.SL
Receiver 40-450 W/V/A dimmer, 230 V~. Depth: 40,5 mm



Δ 01849
IR remote control, 14-channel



14181
Lighting switch, NO 6 A 230 V~ relay output, 50/60 Hz
14181.120
As above, 120 V~. Depth: 36 mm



00801
Orientable support - 1 module



00805
Adaptor for orientable support flush mounting - 2 modules. Depth: 36,5 mm



00800
Frame for orientable support surface mounting



14181.SL
Lighting switch, NO 6 A 230 V~ relay output, 50/60 Hz
14181.120.SL
As above, 120 V~. Depth: 36 mm



00801.20
Orientable support - 1 module



00805.20
Adaptor for orientable support flush mounting - 2 modules. Depth: 36,5 mm



00800.20
Frame for orientable support surface mounting



02690
Lighting switch, 2000 W incandescent lamps, CFL 10-1000 W, LED 100 W, 220-240 V~ 50/60 Hz, ceiling mounting

Devices

White

Silver

Set/Reset push buttons

**14183**

For emergency call, 2 NO 5 A 250 V~
relay outputs, supply 12 V~/
12-24 Vdc (SELV) - 2 modules.
Depth: 36 mm

**14183.SL**

For emergency call, 2 NO 5 A 250 V~
relay outputs, supply 12 V~/
12-24 Vdc (SELV) - 2 modules.
Depth: 36 mm

Radiofrequency kits

**0K03906.04**

Kit Friends of Hue. Contains:

- 1 4-button RF device 03906
- 1 mounting frame 14507, white
- 2 buttons 14506, white
- 1 2-module cover plate 14642.01, white

Radiofrequency smart devices

**03955**

4-button flat device with RF transmission,
868 MHz, **EnOcean®** standard,
to be completed with buttons
14506+14506.2 - 2 modules

**01796.2**

Multi-function actuator with relay output NO 10 A 230 V~
programmable with switch function for local control,
transferable local input as ON/OFF control for other
EnOcean® actuators, 230 V~ 50/60 Hz power supply

**03925**

4-button flat device with RF transmission,
2.4 GHz, **Bluetooth® Low Energy**
wireless technology, to be completed
with buttons 14506+14506.2
- 2 modules

**03905**

4-button flat device with RF transmission,
2.4 GHz, **ZigBee Green Power**
standard, to be completed with
buttons 14506+14506.2
- 2 modules

**03906**


4-button flat device with RF transmission,
2.4 GHz, **ZigBee Green Power** and
Friends of Hue standard, to be completed
with buttons 14506 - 2 modules

**20507.B**

Frame for RF devices surface
mounting, white

**20507**

Frame for RF devices surface
mounting, grey

**14507**

Frame for RF devices surface
mounting, white

**14506**

Pair of 1-module
buttons for RF
devices,
customizable

**14506.2**

2-module
button for RF
devices, customizable

**14506.SL**

Pair of 1-module
buttons for RF
devices,
customizable

**14506.2.SL**

2-module
button for RF
devices, customizable

Socket outlets

White				Silver			
SICURY 2P+E Italian standard socket outlets 250 V~							
							
14201 10 A, P11. Depth: 25 mm	14203 Bresa 16 A, P17/11	14209 16 A. P30 - 2 modules. Depth: 28,4 mm	14210 16 A, universal - 2 modules 14210.AB As above, antibacterial treatment. Depth: 25 mm	14201.SL 10 A, P11. Depth: 25 mm	14203.SL Bresa 16 A, P17/11	14209.SL 16 A. P30 - 2 modules. Depth: 28,4 mm	14210.SL 16 A, universal - 2 modules. Depth: 25 mm

View Wireless connected control device for socket outlet

	 VIEW IoT smart life	 Bluetooth®	 zigbee certified product		 VIEW IoT smart life	 Bluetooth®	 zigbee certified product
14593 Control device with NO 16 A 100-240 V~ 50/60 Hz relay output, local control with push button or remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, function for measuring the instant power and load cut-off threshold. Depth: 38,5 mm				14593.SL Control device with NO 16 A 100-240 V~ 50/60 Hz relay output, local control with push button or remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, function for measuring the instant power and load cut-off threshold. Depth: 38,5 mm			

SICURY 2P+E socket outlets 250 V~ (for dedicated supply lines)

						
14203.R Bresa 16 A P17/11, red	14209.A 16 A P30, orange - 2 modules. Depth: 28,4 mm	14209.R 16 A P30, red - 2 modules. Depth: 28,4 mm	14209.V 16 A P30, green - 2 modules. Depth: 28,4 mm	14210.AB.A 16 A, universal, orange, antibacterial treatment - 2 modules. Depth: 25 mm	14210.R 16 A, universal, red - 2 modules	14210.AB.V 16 A, universal, green, antibacterial treatment - 2 modules. Depth: 25 mm

Socket outlets 250 V~ - German standard

			
14208 SICURY 2P+E 16 A, German - 2 modules	14208.C SICURY 2P+E 16 A, German, with cover - 2 modules. Depth: 29,6 mm	14208.SL SICURY 2P+E 16 A, German - 2 modules. Depth: 28,4 mm	14208.C.SL SICURY 2P+E 16 A, German, with cover - 2 modules. Depth: 29,6 mm

Socket outlets

White

Silver

Socket outlets 250 V~, screwless terminals - German standard



14208.FX
SICURY 2P+E
16 A, German
- 2 modules.
Depth: 32,5 mm



14208.FX.C
SICURY 2P+E 16 A,
German, with cover
- 2 modules.
Depth: 29,6 mm



14208.FX.SL
SICURY 2P+E
16 A, German
- 2 modules.
Depth: 32,5 mm



14208.FX.C.SL
SICURY 2P+E 16 A,
German, with cover
- 2 modules.
Depth: 29,6 mm

Socket outlets 250 V~ - French standard



14212
SICURY 2P+E
16 A, French
- 2 modules.
14212.AB
As above,
antibacterial
treatment.
Depth: 25,4 mm



14212.C
SICURY 2P+E 16 A,
French, with cover
- 2 modules.
Depth: 26,7 mm



14212.SL
SICURY 2P+E
16 A, French
- 2 modules.
Depth: 25,4 mm



14212.C.SL
SICURY 2P+E 16 A,
French, with cover
- 2 modules.
Depth: 26,7 mm

Socket outlets 250 V~, screwless terminals - French standard



14212.FX
SICURY 2P+E
16 A, French
- 2 modules.
Depth: 29,5 mm



14212.FX.C
SICURY 2P+E 16 A,
French, with cover
- 2 modules.
Depth: 29,9 mm



14212.FX.SL
SICURY 2P+E
16 A, French
- 2 modules.
Depth: 29,5 mm



14212.FX.C.SL
SICURY 2P+E 16 A,
French, with cover
- 2 modules.
Depth: 29,9 mm

Socket outlets 250 V~ - English standard



14214
SICURY 2P+E
5 A, English
- 2 modules.
Depth: 16,8 mm



14218
SICURY 2P+E
16 A, English
- 2 modules.
Depth: 25,2 mm



14219
2P+E 13 A,
English
- 2 modules.
Depth: 17 mm



14220
SICURY 2P+E
13 A, English
- 2 modules.
Depth: 21,4 mm




14214.SL
SICURY 2P+E
5 A, English
- 2 modules.
Depth: 16,8 mm



14218.SL
SICURY 2P+E
16 A, English
- 2 modules.
Depth: 25,2 mm



14219.SL
2P+E 13 A,
English
- 2 modules.
Depth: 17 mm



14220.SL
SICURY 2P+E
13 A, English
- 2 modules.
Depth: 21,4 mm

Socket outlets 250 V~ - Swiss standard





14226
2P+E 10 A, Swiss,
13-type - 2 modules.
Depth: 41 mm



14226.SL
2P+E 10 A, Swiss,
13-type - 2 modules.
Depth: 41 mm

Socket outlets

White	Silver
Socket outlets 250 V~ - Euro-American standard	
 14233 2P 16 A, Euro-American (ø 4,8 mm). Depth: 28 mm	 14233.SL 2P 16 A, Euro-American (ø 4,8 mm). Depth: 28 mm
 14234 SICURY 2P+E 16 A, Euro-American. Depth: 27 mm	 14234.SL SICURY 2P+E 16 A, Euro-American. Depth: 27 mm
 14248 SICURY 2P+E 16 A, Euro-American - 2 modules. Depth: 27 mm	 14248.SL SICURY 2P+E 16 A, Euro-American - 2 modules. Depth: 25,5 mm
 14249 Two SICURY 2P+E 16 A, Euro-American - 3 modules. Depth: 23,5 mm	 14249.SL Two SICURY 2P+E 16 A, Euro-American - 3 modules. Depth: 23,5 mm
Socket outlets 127 V~ - USA and Arabian standard	
 14242 SICURY 2P+E 15 A, USA and Arabian	 14242.SL SICURY 2P+E 15 A, USA and Arabian
 14243 Two SICURY 2P+E 15 A, USA and Arabian - 3 modules	 14243.SL Two SICURY 2P+E 15 A, USA and Arabian - 3 modules
 14245 2P+E 15 A, USA and Arabian. Depth: 26,4 mm	 14245.SL 2P+E 15 A, USA and Arabian. Depth: 26,4 mm
 14246 Two 2P+E 15 A, USA and Arabian - 3 modules. Depth: 25 mm	 14246.SL Two 2P+E 15 A, USA and Arabian - 3 modules. Depth: 25 mm
Socket outlets 250 V~ - American standard	
 14247 2P+E 15 A, American. Depth: 26,4 mm	 14247.SL 2P+E 15 A, American. Depth: 26,4 mm
Socket outlets 250 V~ - Israeli standard	
 14240 SICURY 2P+E 16 A, Israeli - 2 modules. Depth: 28,7 mm	 14240.SL SICURY 2P+E 16 A, Israeli - 2 modules. Depth: 28,7 mm
Socket outlets 250 V~ - Argentinian standard	
 14250 SICURY 2P+E 10 A, Argentinian. Depth: 26 mm	 14250.SL SICURY 2P+E 10 A, Argentinian. Depth: 26 mm
 14253 SICURY 2P+E 20 A, Argentinian - 2 modules. Depth: 27,8 mm	 14253.SL SICURY 2P+E 20 A, Argentinian - 2 modules. Depth: 27,8 mm

Socket outlets

White

Silver

Socket outlets 250 V~ - Chinese standard



14254
SICURY 2P+E
16 A, Chinese
- 2 modules.
Depth: 27,8 mm



14254.SL
SICURY 2P+E
16 A, Chinese
- 2 modules.
Depth: 27,8 mm

Socket outlets 250 V~ - Australian standard



14261
SICURY 2P+E
10 A, Australian
- 2 modules.
Depth: 28,2 mm



14262
SICURY 2P+E
15 A, Australian
- 2 modules.
Depth: 28,2 mm



14261.SL
SICURY 2P+E
10 A, Australian
- 2 modules.
Depth: 28,2 mm



14262.SL
SICURY 2P+E
15 A, Australian
- 2 modules.
Depth: 28,2 mm

Socket outlets 250 V~ - Brazilian standard



14264
SICURY
2P+E 10 A,
Brazilian.
Depth:
31,5 mm



14265
SICURY
2P+E 20 A,
Brazilian.
Depth:
31,5 mm



14264.SL
SICURY
2P+E 10 A,
Brazilian.
Depth:
31,5 mm



14265.SL
SICURY
2P+E 20 A,
Brazilian.
Depth:
31,5 mm

Socket outlets 250 V~ - Multistandard



14255
SICURY 2P+E 13 A,
multistandard
- 3 modules.
Depth: 18,54 mm



***14257**
SICURY 2P+E 13 A,
multistandard
- 2 modules.
Depth: 17,7 mm



14255.SL
SICURY 2P+E 13 A,
multistandard
- 3 modules.
Depth: 18,54 mm

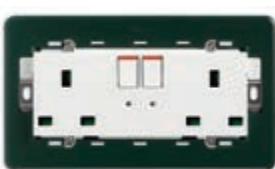


***14257.SL**
SICURY 2P+E 13 A,
multistandard
- 2 modules.
Depth: 17,7 mm

Socket outlets 250 V~ - British standard (lightable with signalling unit 00930°)




14221⁴
SICURY 2P+E 13 A,
1-gang, switched.
Depth: 17,5 mm



14222⁴
SICURY 2P+E 13 A, 2-gang, switched.
Depth: 17,5 mm



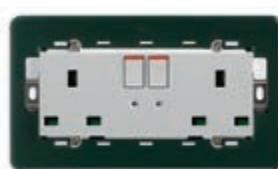14221.SL⁴
SICURY 2P+E 13 A,
1-gang, switched.
Depth: 17,5 mm



14222.SL⁴
SICURY 2P+E 13 A, 2-gang, switched.
Depth: 17,5 mm

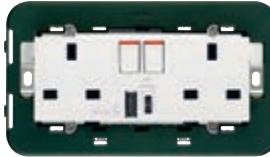
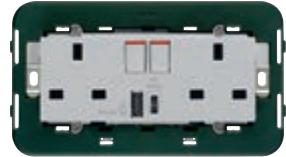
* Not to be used in European Countries

▲ New article

Δ Available until stocks last

■ New article, contact the commercial network for further information

Socket outlets

White	Silver
Socket outlets 250 V~ - British standard (lightable with signalling unit 00930°)	
	
14215⁵ SICURY 2P+E 5 A, 1-gang, switched. Depth: 17,5 mm	14217⁵ SICURY 2P+E 15 A, 1-gang, switched. Depth: 25,5 mm
Socket outlets 125 V~ - 2P+E 15 A 60 Hz - American standard	
	
14296 Double American standard with GFCI - 3 modules. Depth: 33,4 mm	
British Standard 250 V~ - socket outlets and USB supply units	
	
■ 14223.A SICURY 2P+E 13 A 250 V~ with 2P 1-way switch and 1 USB-A. Depth: 21 mm	■ 14223.A.SL SICURY 2P+E 13 A 250 V~ with 2P 1-way switch and 1 USB-A. Depth: 21 mm
	
■ 14224.AC SICURY 2P+E 13 A 250 V~ with 2P 1-way switches, 1 USB-A and 1 USB-C. Depth: 21 mm	■ 14224.AC.SL SICURY 2P+E 13 A 250 V~ with 2P 1-way switches, 1 USB-A and 1 USB-C. Depth: 21 mm
	
■ 14266.A SICURY 2P+E 13 A 250 V~, multistandard, with 1 2P 1-way switch and 1 USB-A. Depth: 21 mm	■ 14266.A.SL SICURY 2P+E 13 A 250 V~, multistandard, with 1 2P 1-way switch and 1 USB-A. Depth: 21 mm

Socket outlets

	White						Silver					
SOCKET OUTLET	German	French	English				Swiss	Israeli	British standard			
PLUG	14208...	14212...	14214	14218	14219	14220	14226	14240	14221	14222	14215	14217
S10 Italian standard	●	●						●				
2P 2,5 A Europlug	●	●					●	●				
2P+E 16 A 250 V~ German standard	●							○				
2P+E 16 A 250 V~ German and French standards	●	●						○				
2P 16 A 250 V~ German and French standards	●	●						●				
2P+E 16 A 250 V~ French standard		●						○				
2P+E 10 A 250 V~ Swiss standard							●					
2P+E 16 A 250 V~ Israeli standard								●				
2P+E 5 A 250 V~ English standard			●									●
2P+E 13 A 250 V~ English standard				●	●				●	●		
2P+E 16 A 250 V~ English standard				●								
2P+E 15 A 250 V~ English standard												●
2P 13 A 220 V~ Saudi Arabian standard									●	●		

● Plug standard matches socket outlet; ○ Plug standard matches the socket outlet without earth connection.

Possibles matches - Foreign standard plugs and socket outlets

SOCKET OUTLET	Multistandard				American				Euroamerican				American Saudi Arabian			
	14257	14255	14247	14296	14233	14234	14248	14249	20242	20245	20243	20246				
S10 Italian standard	●	●			●	●	●	●								
2P 2,5 A Europlug	●	●			●	●	●	●								
Spina 2P+E 16 A 250 V~ German standard	○	○			○	○	○	○								
2P+E 16 A 250 V~ German and French standards					○	○	○	○								
2P 16 A 250 V~ German and French standards					●	●	●	●								
2P+E 16 A 250 V~ French standard					○	○	○	○								
2P+E 15 A 125 V~ American standard				●					●	●						
2P+E 15 A 250 V~ American standard				●												
2P+E 10 A 250 V~ Swiss standard	●	●														
2P+E 5 A 250 V~ English standard	●	●														
2P+E 13 A 250 V~ English standard	●	●														
2P+E 15 A 125 V~ American standard									●	●	●	●				
2P 15 A 127 V~ American and Saudi Arabian standards										●	●	●	●			
2P+E 10 A 250 V~ Brazilian standard	●	●														
2P+E 10 A 250 V~ Chinese standard	●	●														
2P+E 10 A 250 V~ Australian standard	●	●														

● Plug standard matches socket outlet; ○ Plug standard matches the socket outlet without earth connection.

Socket outlets

	White		Silver				
SOCKET OUTLET \ PLUG	Argentinian		Brazilian		Chinese	Australian	
	14250	14253	14264	14265	14254	20261	14262
2P 2,5 A Europlug			•	•			
2P+E 10 A 250 V~ Argentinian standard	•						
2P+E 20 A 250 V~ Argentinian standard		•					
2P+E 10 A 250 V~ Brazilian standard			•	•			
2P+E 20 A 250 V~ Brazilian standard				•			
2P+E 16 A 250 V~ Chinese standard					•		
2P+E 10 A 250 V~ Australian standard						•	
2P+E 15 A 250 V~ Australian standard							•

● Plug standard matches socket outlet; ○ Plug standard matches the socket outlet without earth connection.

SICURY 2P+E interlocked socket outlets with CB and RCBO $I_{\Delta n} 10 \text{ mA}$,  (120-230 V~ 50/60 Hz)

14273
Bpresa 16 A P17/11
250 V~, 1P+N C 16
- 2 modules.
Depth: 38,7 mm

14276
16 A P30 250 V~,
1P+N C 16
- 3 modules.
Depth: 38,8 mm



14273.SL
Bpresa 16 A P17/11
250 V~, 1P+N C 16
- 2 modules.
Depth: 38,7 mm

14276.SL
16 A P30 250 V~,
1P+N C 16
- 3 modules.
Depth: 38,8 mm



14283
Bpresa 16 A P17/11
250 V~, 1P+N C 16
- 3 modules.
Depth: 38,7 mm


14286
16 A P30 250 V~,
1P+N C 16 - 4 modules.
Depth: 38,7 mm



14283.SL
Bpresa 16 A P17/11
250 V~, 1P+N C 16
- 3 modules.
Depth: 38,7 mm

14286.SL
16 A P30 250 V~,
1P+N C 16 - 4 modules.
Depth: 38,7 mm

Shaver supply units




14290
230 V~ 50/60 Hz, with 20 VA
isolating transformer, 230 V~ and
120 V~ outputs - 3 modules

14290.AB
As above,
antibacterial treatment.
Depth: 41 mm



14291
230 V~ 50/60 Hz, with 20 VA
isolating transformer, 230 V~ and
120 V~ outputs. Depth: 41 mm




14290.SL
230 V~ 50/60 Hz, with 20 VA
isolating transformer, 230 V~ and
120 V~ outputs - 3 modules.
Depth: 41 mm




14291.SL
230 V~ 50/60 Hz, with 20 VA
isolating transformer, 230 V~ and
120 V~ outputs. Depth: 41 mm

Socket outlets • Signal reception socket outlets

White	Silver
USB supply unit	
 14292 5 V 1,5 A, 1 USB-A, 120-230 V~ 50/60 Hz. Depth: 36 mm	 ▲14292.AC 5 V 2,4 A, USB-A+C, 120-240 V~ 50/60 Hz. Depth: 36 mm
 14292.C 5 V 1,5 A, 1 USB-C, 120-240 V~ 50/60 Hz. Depth: 36 mm	 14292.SL 5 V 1,5 A, 1 USB-A, 120-230 V~ 50/60 Hz. Depth: 36 mm
 14295 5 V 2,1 A, 2 USB-A for total of 2,1 A, 120-230 V~ 50/60 Hz - 2 modules. Depth: 36 mm	 ▲14295.AC 5 V 3 A, USB-A+C for total of 3 A, 120-240 V~ 50/60 Hz - 2 modules. Depth: 29 mm
 ▲14295.CC 5 V 3 A, 2 USB-C for total of 3 A, 120-240 V~ 50/60 Hz - 2 modules. Depth: 29 mm	 14295.SL 5 V 2,1 A, 2 USB-A for total of 2,1 A, 120-230 V~ 50/60 Hz - 2 modules. Depth: 36 mm
 ▲14295.AC.SL 5 V 3 A, USB-A+C for total of 3 A, 120-240 V~ 50/60 Hz - 2 modules. Depth: 29 mm	 ▲14295.CC.SL 5 V 3 A, 2 USB-C for total of 3 A, 120-240 V~ 50/60 Hz - 2 modules. Depth: 29 mm
Sound system	
 21588.B Passive speaker, 8 Ω 10 W, with built-in 8-module frame. Depth: 48 mm	 20587.B Passive speaker, 8 Ω 3 W - 3 modules. Depth: 40 mm
 21588.N Passive speaker, 8 Ω 10 W, with built-in 8-module frame. Depth: 48 mm	 20587.N Passive speaker, 8 Ω 3 W - 3 modules. Depth: 40 mm
 14099 Volume control, 8 Ω 15 W - 2 modules. Depth: 29,7 mm	
 14590 4+4 W stereo amplifier, 2 outputs for 8 Ω sound diffusers with built-in Bluetooth® wireless technology receiver, 1 LINE IN, supply voltage 12 Vdc - 2 modules. Depth: 36 mm	 14590.SL¹ 4+4 W stereo amplifier, 2 outputs for 8 Ω sound diffusers with built-in Bluetooth® wireless technology receiver, 1 LINE IN, supply voltage 12 Vdc - 2 modules. Depth: 36 mm

¹ The article can be ordered with Bluetooth network customisation
(see specifications on page 291)

Signal reception socket outlets

White					Silver				
Special socket outlets									
									
14330 2P 6 A 24 V (SELV), for 01620 plug 14330.AB As above, antibacterial treatment. Depth: 24 mm	14331 2P 6 A 24 V (SELV), for 01616/01617 plugs. Depth: 24 mm	14332 2P 6 A 24 V (SELV). Depth: 23 mm	Δ 14333 5P DIN 41524 socket connector. Depth: 10 mm	14345 USB outlet, screw terminals. Depth: 30,9 mm	14330.SL 2P 6 A 24 V (SELV), for 01620 plug. Depth: 24 mm	14331.SL 2P 6 A 24 V (SELV), for 01616/01617 plugs. Depth: 24 mm	14332.SL 2P 6 A 24 V (SELV). Depth: 23 mm	Δ 14333.SL 5P DIN 41524 socket connector. Depth: 10 mm	14345.SL USB outlet, screw terminals. Depth: 30,9 mm
									
14335 3 RCA outlets, screw terminals. Depth: 23,4 mm	Δ 14347 S-Video, 4-pin. Depth: 15,5 mm	14346 HDMI outlet, Keystone connection. Depth: 36,4 mm	14346.H HDMI outlet, Keystone connection, with 90° cable. Depth: 29,4 mm	14335.SL 3 RCA outlets, screw terminals. Depth: 23,4 mm	Δ 14347.SL S-Video, 4-pin. Depth: 15,5 mm	14346.SL HDMI outlet, Keystone connection. Depth: 36,4 mm	14346.H.SL HDMI outlet, Keystone connection, with 90° cable. Depth: 29,4 mm		
14583 Spring connector for speaker. Depth: 18,4 mm	14348 VGA, 15-pin. Depth: 10 mm	Δ 14361 BNC, RG58, RG59/62, RX93 soldering. Depth: 10 mm	Δ 14365 9-contact, SUB D, soldering - 2 modules. Depth: 10 mm	14583.SL Spring connector for speaker. Depth: 18,4 mm	14348.SL VGA, 15-pin. Depth: 10 mm	Δ 14361.SL BNC, RG58, RG59/62, RX93 soldering. Depth: 10 mm	Δ 14365.SL 9-contact, SUB D, soldering - 2 modules. Depth: 10 mm		
14320 RJ11, 6-position 4-contact (6/4) 14320.AB As above, antibacterial treatment. Depth: 32,4 mm	14321 RJ12, 6-position 6-contact (6/6). Depth: 32,6 mm	14324 Israeli stand- ard, screw terminals. Depth: 32,4 mm	14327 8-contact, French standard - 2 modules. Depth: 21 mm	14320.SL RJ11, 6-position 4-contact (6/4). Depth: 32,4 mm	14321.SL RJ12, 6-position 6-contact (6/6). Depth: 32,6 mm	14324.SL Israeli stand- ard, screw terminals. Depth: 32,4 mm	14327.SL 8-contact, French standard - 2 modules. Depth: 21 mm		
14322 RJ11, 6-position 4-contact (6/4) + cover. Depth: 32,4 mm	14323 RJ12, 6-position 6-contact (6/6) + cover. Depth: 32,4 mm	14325⁷ BT, MASTER + cover. Depth: 32,4 mm	14326⁷ BT, SLAVE + cover. Depth: 32,4 mm	14322.SL RJ11, 6-position 4-contact (6/4) + cover. Depth: 32,4 mm	14323.SL RJ12, 6-position 6-contact (6/6) + cover. Depth: 32,4 mm	14325.SL⁷ BT, MASTER + cover. Depth: 32,4 mm	14326.SL⁷ BT, SLAVE + cover. Depth: 32,4 mm		

Signal reception socket outlets

White	Silver
Coaxial TV-RD-SAT 5-2400 MHz socket outlets (output male and female)	
 14300.01 Single connection 1 dB. antibacterial treatment. Depth: 22,6 mm	 14300.10.SL Single connection 1 dB. Through-line 10 dB. Depth: 22,4 mm
Coaxial TV-RD-SAT 5-2400 MHz socket outlets, demix (2 outputs: male and F-type female)	
 14302.01 Single connection 1 dB - 2 modules. Depth: 22,4 mm	 14302.10.SL Single connection 1 dB - 2 modules. Through-line 10 dB - 2 modules. Depth: 22,4 mm
Coaxial TV-FM-SAT 5-2400 MHz socket outlets (3 outputs: male and female + F-type)	
 14303 Single connection 1 dB - 2 modules. Depth: 20,5 mm	 14303.SL Single connection 1 dB - 2 modules. Depth: 20,5 mm
Coaxial F-type socket outlets	
 14318 With F-type female connector. Depth: 10 mm	 14318.SL With F-type female connector. Depth: 10 mm
Coaxial TV 40-862 MHz socket outlets (1 output: female)	
 *14313 Single connection. Depth: 28 mm	 *14313.SL Single connection. Depth: 28 mm
 Δ14314 Through-line 20 dB. Depth: 27,5 mm	 Δ14314.SL Through-line 20 dB. Depth: 27,5 mm
Adaptor for TV-RD-SAT socket outlets	
 14319 For 2 or 3 outputs - 2 modules	 14319.SL For 2 or 3 outputs - 2 modules

* Not to be used in European Countries

▲ New article

Δ Available until stocks last

Signal reception socket outlets

White

Silver

Terminal resistors and coaxial TV-RD-SAT 2400 MHz connectors

					
16330 Z 75 Ω, for frequencies up to 2400 MHz	01644 Male, axial cable entry	01645 Female, axial cable entry	01634 Male, 90°-cable entry	01635 Female, 90°-cable entry	01654 Male, F-type, for RG59 cable

RJ45 data ports

								
14338.8 Netsafe, Cat. 5e, UTP. Depth: 22,6 mm	14339.4 Netsafe, Cat. 5e, UTP 110. Depth: 23,7 mm	14339.5 Netsafe, Cat. 5e, FTP 110. Depth: 36,5 mm	14339.6 Netsafe, Cat. 6, UTP 110. Depth: 36,5 mm	14342.AB 8-position, 8-contact (8/8) antibacterial treatment. Depth: 32,6 mm	14338.8.SL Netsafe, Cat. 5e, UTP. Depth: 22,6 mm	14339.4.SL Netsafe, Cat. 5e, UTP 110. Depth: 23,7 mm	14339.5.SL Netsafe, Cat. 6, FTP 110. Depth: 36,5 mm	14339.6.SL Netsafe, Cat. 6, UTP 110. Depth: 24 mm
								
14340.1 Panduit, Cat. 5e, UTP. Depth: 27,4 mm	14340.2 Panduit, Cat. 5e, FTP. Depth: 28 mm	14337.6 Cat. 6, UTP, shuttered. Depth: 25,1 mm	14339.11 Netsafe, Cat. 5e, UTP. Depth: 29,3 mm	14340.1.SL Panduit, Cat. 5e, UTP. Depth: 27,4 mm	14340.2.SL Panduit, Cat. 5e, FTP. Depth: 28 mm	14337.6.SL Cat. 6, UTP, shuttered. Depth: 25,1 mm	14339.11.SL Netsafe, Cat. 5e, UTP. Depth: 29,3 mm	
								
14339.13 Netsafe, Cat. 6, UTP	14339.14 Netsafe, Cat. 6, FTP	14339.15 Netsafe, Cat. 6A, UTP	14339.16 Netsafe, Cat. 6A, FTP. Depth: 29,3 mm	14339.13.SL Netsafe, Cat. 6, UTP. Depth: 29,3 mm	14339.14.SL Netsafe, Cat. 6, FTP. Depth: 29,3 mm	14339.15.SL Netsafe, Cat. 6A, UTP. Depth: 29,3 mm	14339.16.SL Netsafe, Cat. 6A, FTP. Depth: 29,3 mm	
14339.AB.13 As above, antibacterial treatment. Depth: 29,3 mm	14339.AB.14 As above, antibacterial treatment. Depth: 29,3 mm							

Wi-Fi access point

	
14195 54 Mb/s with 2 LAN 10-100 Mb/s ports, ON/OFF inputs for remote control, 230 V~ 50/60 Hz - 2 modules. Depth: 41 mm	14195.SL 54 Mb/s with 2 LAN 10-100 Mb/s ports, ON/OFF inputs for remote control, 230 V~ 50/60 Hz - 2 modules. Depth: 41 mm

Signal reception socket outlets • Signalling

White	Silver
Adapters for data ports	
 14337.C RJ45 Keystone + cover. Depth: 10 mm	 14338.C RJ45 Cat. 5/6 AMP, Lucent T. Depth: 10 mm
 14340.C For MINI-COM Panduit. Depth: 10 mm	 14341.C For Cat. 5e and 6 Slim of Infra+, Merlin Gerin. Depth: 10 mm
 14343.K Slanting adaptor for RJ45 Keystone. Depth: 10 mm	 14337.C.SL RJ45 Keystone + cover. Depth: 10 mm
 14338.C.SL RJ45 Cat. 5/6 AMP, Lucent T. Depth: 10 mm	 14340.C.SL For MINI-COM Panduit. Depth: 10 mm
 14341.C.SL For Cat. 5e and 6 Slim of Infra+, Merlin Gerin. Depth: 10 mm	 14343.K.SL Slanting adaptor for RJ45 Keystone. Depth: 10 mm
Sockets for fibre optic cable	
 14350.SC Monomode 9/125 µm, with SC/APC simplex adapter. Depth: 19,4 mm	 14350.LC Monomode 9/125 µm, with LC duplex adapter. Depth: 19,6 mm
 14351.SC Multimode 50/125 µm, with SC simplex adapter. Depth: 19,4 mm	 14351.LC Multimode 50/125 µm, with LC duplex adapter. Depth: 19,6 mm
 14350.SC.SL Monomode 9/125 µm, with SC/APC simplex adapter. Depth: 19,4 mm	 14350.LC.SL Monomode 9/125 µm, with LC duplex adapter. Depth: 19,6 mm
 14351.SC.SL Multimode 50/125 µm, with SC simplex adapter. Depth: 19,4 mm	 14351.LC.SL Multimode 50/125 µm, with LC duplex adapter. Depth: 19,6 mm
Electromechanical bells	
 14370 12 V~ (SELV) 50/60 Hz. Depth: 36 mm	 14372 120 V~ 50/60 Hz. Depth: 36 mm
 14373 230 V~ 50/60 Hz. Depth: 36 mm	 14370.SL 12 V~ (SELV) 50/60 Hz. Depth: 36 mm
 14372.SL 120 V~ 50/60 Hz. Depth: 36 mm	 14373.SL 230 V~ 50/60 Hz. Depth: 36 mm
Electronic bells	
 14380 3-sound sequence, supply voltage 12 V~ and 12 Vdc (SELV) - 2 modules. Depth: 36 mm	 14380.SL 3-sound sequence, supply voltage 12 V~ and 12 Vdc (SELV) - 2 modules. Depth: 36 mm
Buzzers	
 14375 12 V~ (SELV) 50/60 Hz. Depth: 36 mm	 14375.SL 12 V~ (SELV) 50/60 Hz. Depth: 36 mm
 14377 120 V~ 50/60 Hz. Depth: 36 mm	 14377.SL 120 V~ 50/60 Hz. Depth: 36 mm
 14378 230 V~ 50/60 Hz. Depth: 36 mm	 14378.SL 230 V~ 50/60 Hz. Depth: 36 mm

* Not to be used in European Countries

▲ New article

Δ Available until stocks last

Signalling

White	Silver
Luminous indicator units (for 1 or 2 signalling units°)	
 14386.B White diffuser. Depth: 22 mm	 14388 Neutral diffusers. Depth: 22 mm
 14386.B.SL White diffuser. Depth: 22 mm	 14388.SL Neutral diffusers. Depth: 22 mm
Prismatic indicator units - 2 modules (for 14771 and 14777 lamps - not supplied)	
 14387.B White diffuser. Depth: 24 mm	 14387.R Red diffuser. Depth: 24 mm
 14387.V Green diffuser. Depth: 24 mm	 14387.B.SL White diffuser. Depth: 24 mm
 14387.R.SL Red diffuser. Depth: 24 mm	 14387.V.SL Green diffuser. Depth: 24 mm
Step marker lamps	
 14390 Adjustable beam, for 14771 and 14777 lamps (not supplied) - 2 modules. Depth: 34 mm	
Step marker lamps (with high-efficiency LED)	
 14389 230 V~ 50/60 Hz - 2 modules. Depth: 36 mm	 14389.SL 230 V~ 50/60 Hz - 2 modules. Depth: 36 mm
 14381 230 V~ 50/60 Hz 14381.012 12 V~ 50/60 Hz or 12 Vdc (SELV). Depth: 36 mm	 14381.SL 230 V~ 50/60 Hz 14381.012.SL 12 V~ 50/60 Hz or 12 Vdc (SELV). Depth: 36 mm
Lighting fittings	
 14383 With high-efficiency LED, 120-230 V~ 50/60 Hz - 3 modules. Depth: 36 mm	 14383.SL With high-efficiency LED, 120-230 V~ 50/60 Hz - 3 modules. Depth: 36 mm
 02670.1 With high-efficiency LED, 120-230 V~ 50/60 Hz and built-in 6/7-module frame. Depth: 43 mm	

Signalling • Protection

White

Silver

TORCIA, electronic hand-lamps (with automatic emergency device)



14395
With high-efficiency LED,
230 V~ 50/60 Hz - 2 modules.
Depth: 39,5 mm



14395.SL
With high-efficiency LED,
230 V~ 50/60 Hz - 2 modules.
Depth: 39,5 mm

Emergency lighting fittings (with automatic emergency device)



14382
With high-efficiency LED,
230 V~ 50/60 Hz.
Depth: 36 mm



14384
With high-efficiency LED,
120-230 V~ 50/60 Hz
- 3 modules.
Depth: 36 mm



14382.SL
With high-efficiency LED,
230 V~ 50/60 Hz.
Depth: 36 mm



14384.SL
With high-efficiency LED,
120-230 V~ 50/60 Hz
- 3 modules.
Depth: 36 mm

Emergency lighting fittings



02660.1
With high-efficiency LED, supply voltage 230 V~ 50/60 Hz,
rechargeable Ni-Cd battery, built-in mounting frame for
7-module flush mounting boxes. Depth: 43 mm



14394
230 V~ 50/60 Hz, Ni-Cd battery, with FD
4W G5 lamp and built-in 7-module frame.
Depth: 43 mm



02662
LED, controllable,
230 V~ 50 Hz - 3 modules

02662.120
As above, 120 V~.
Depth: 39 mm



02663
LED RGB, controllable,
230 V~ 50 Hz - 3 modules

02663.120
As above, 120 V~.
Depth: 39 mm

Rechargeable batteries



00908
3 x Ni-MH 1,2 V
800 mAh,
HR03 (AAA)



00910
Ni-MH 4,8 V 80 mAh
battery, spare part for
TORCIA



00911.1
Rechargeable Ni-Cd 2,4 V
1,3 Ah battery, spare part for
emergency lighting fittings
(14393 and 14394)



00913
Ni-Cd 4,8 V 800 mAh spare
rechargeable battery for
02660.1

Protection devices



14416
1P 16 A 250 V~
fuse carrier.
Depth: 28 mm



14418
SCUDO, transient
voltage suppressor.
Depth: 34,3 mm



14416.SL
1P 16 A 250 V~
fuse carrier.
Depth: 28 mm



14418.SL
SCUDO, transient
voltage suppressor.
Depth: 34,3 mm

Protection • Detection

White

Silver

1P circuit breakers (120-230 V~ 50/60 Hz)



14404.10
C 10, breaking capacity 1500 A.
Depth: 38 mm



14404.16
C 16, breaking capacity 1500 A.
Depth: 38 mm



14404.10.SL
C 10, breaking capacity 1500 A.
Depth: 38 mm



14404.16.SL
C 16, breaking capacity 1500 A.
Depth: 38 mm

1P+N circuit breakers (120-230 V~ 50/60 Hz)



14405.06
C 6, breaking capacity 1500 A.
Depth: 38 mm



14405.10
C 10, breaking capacity 3000 A.
Depth: 38 mm



14405.16
C 16, breaking capacity 3000 A.
Depth: 38 mm



14405.06.SL
C 6, breaking capacity 1500 A.
Depth: 38 mm



14405.10.SL
C 10, breaking capacity 3000 A.
Depth: 38 mm



14405.16.SL
C 16, breaking capacity 3000 A.
Depth: 38 mm

1P+N residual current breakers with overcurrent protection (RCBO) (120-230 V~ 50/60 Hz 

14411.06
C 6, $I_{\Delta n}$ 10 mA
breaking capacity
1500 A - 2 modules.
Depth: 38 mm



14411.10
C 10, $I_{\Delta n}$ 10 mA
breaking capacity
3000 A - 2 modules.
Depth: 38 mm



14411.06.SL
C 6, $I_{\Delta n}$ 10 mA
breaking capacity
1500 A - 2 modules.
Depth: 38 mm



14411.10.SL
C 10, $I_{\Delta n}$ 10 mA
breaking capacity
3000 A - 2 modules.
Depth: 38 mm



14411.16
C 16, $I_{\Delta n}$ 10 mA
breaking capacity
3000 A - 2 modules.
Depth: 38 mm



14411.16.6
C 16, $I_{\Delta n}$ 6 mA
breaking capacity
3000 A - 2 modules.
Depth: 38 mm



14411.16.SL
C 16, $I_{\Delta n}$ 10 mA
breaking capacity
3000 A - 2 modules.
Depth: 38 mm



14411.16.6.SL
C 16, $I_{\Delta n}$ 6 mA
breaking capacity
3000 A - 2 modules.
Depth: 38 mm

Detectors (230 V~ 50/60 Hz)



14420
Gas Stop Metano, methane
gas detector, solenoid valve
control - 3 modules.
Depth: 36 mm



14421
Gas Stop GPL, LPG gas
detector, solenoid valve
control - 3 modules.
Depth: 36 mm



14420.SL
Gas Stop Metano, methane
detector, solenoid valve
control - 3 modules.
Depth: 36 mm



14421.SL
Gas Stop GPL, LPG
detector, solenoid valve
control - 3 modules.
Depth: 36 mm



Δ 01899
Gas test cylinder for testing Gas
Stop Metano and GPL detectors

Comfort • Climate

White

Silver

Clocks (120-230 V~ 50/60 Hz)



14448
24h/7day timer-switch,
1-canal, 8 A 230 V~
change-over relay
output - 2 modules.
Depth: 36 mm



Δ 14449
Electronic alarm
clock - 2 modules.
Depth: 36 mm



14448.SL
24h/7day timer-switch,
1-canal, 8 A 230 V~
change-over relay
output - 2 modules.
Depth: 36 mm



Δ 14449.SL
Electronic alarm
clock - 2 modules.
Depth: 36 mm

Electronic thermostats (heating and air-conditioning)



14440
6(2) A 230 V~
change-over
relay output
- 2 modules.
Depth: 36 mm



02950.B
Touch screen thermostat for ON/OFF and PID
temperature control, 1 input for temperature
sensor, 1 multi-function input, 5(2) A 230 V~
change-over relay output - 2 modules.
Depth: 38,5 mm



14440.SL
6(2) A 230 V~
change-over
relay output
- 2 modules.
Depth: 36 mm



02950.BN
Touch screen thermostat for ON/OFF and PID
temperature control, 1 input for temperature
sensor, 1 multi-function input, 5(2) A 230 V~
change-over relay output - 2 modules.
Depth: 38,5 mm

Electronic timer-thermostats (heating and air-conditioning, 120-230 V~ 50/60 Hz)



02955.B
Touch screen timer-thermostat
for ON/OFF and PID temperature
control, 1 input for temperature
sensor, 1 multi-function input,
1 RJ9 input for energy meter
(02960), 5(2) A 230 V~ change-
over relay output - 3 modules.
Depth: 35,3 mm



14445
6(2) A 230 V~
change-over relay
output, 120-230 V~
50/60 Hz - 2 modules.
Depth: 36 mm



14446
5(2) A 250 V~ change-over
relay output, AA LR6 1,5 V
battery (supplied)
- 3 modules.
Depth: 42 mm



02955.BN
Touch screen timer-thermostat
for ON/OFF and PID temperature
control, 1 input for temperature
sensor, 1 multi-function input,
1 RJ9 input for energy meter
(02960), 5(2) A 230 V~ change-
over relay output - 3 modules.
Depth: 35,3 mm



14445.SL
6(2) A 230 V~
change-over relay
output, 120-230 V~
50/60 Hz - 2 modules.
Depth: 36 mm



14446.SL
5(2) A 250 V~ change-over
relay output, AA LR6 1,5 V
battery (supplied)
- 3 modules.
Depth: 42 mm

Electronic sensors



14432
Electronic
temperature
sensor.
Depth: 23,4 mm



14433
Electronic active humidity sensor,
1 output 0-10 V or 4-20 mA, power
supply 12/24V, - 2 modules.
Depth: 36 mm



14432.SL
Electronic
temperature
sensor.
Depth: 23,4 mm



14433.SL
Electronic active humidity sensor,
1 output 0-10 V or 4-20 mA, power
supply 12/24V, - 2 modules.
Depth: 36 mm

Switches for fan-coil regulation



14095
Slide, 1P 6(2) A
250 V~, 4-position.
Depth: 39 mm



14095.SL
Slide, 1P 6(2) A
250 V~, 4-position.
Depth: 39 mm

Climate • Stand alone solutions

White

Silver

Power meter

**02960**

Power meter, 3 inputs for sensor 01457,
50 W-10 kW detectable power,
for DIN (60715 TH35) rail installation 1x17,5 mm.
Supplied with 01457

Wired temperature sensor

**02965.1**

Wired temperature sensor,
NTC 10 kΩ,
cable length 3 m

Video door entry system

**Δ 21554.B**

4,3" Full Flat, for Due Fili Plus video door
system and control, temperature sensor
input, with built-in 8-module mounting
frame. Depth: 46,7 mm

**Δ 21554.BN**

4,3" Full Flat, for Due Fili Plus video door
system and control, temperature sensor
input, with built-in 8-module mounting
frame. Depth: 46,7 mm

**Δ 01963**

Due Fili Plus video door
entry system module

**14557**

Speakerphone for Due Fili
system - 3 modules.
Depth: 36 mm

**14577**

Call button for Due Fili
system - 3 modules.
Depth: 36 mm

**14557.SL**

Speakerphone for Due Fili
system - 3 modules.
Depth: 36 mm

**14577.SL**

Call button for Due Fili
system - 3 modules.
Depth: 36 mm

**Δ 14560**

Inner color
video camera.
Depth: 36 mm

**Δ 14565**

Inner color video
camera and built-in
microphone
- 2 modules.
Depth: 25,5 mm

**14570**

Inner light,
with LED.
Depth:
36 mm

**Δ 14560.SL**

Inner color
video camera.
Depth: 36 mm

**Δ 14565.SL**

Inner color video
camera and built-in
microphone
- 2 modules.
Depth:
25,5 mm

**14570.SL**

Inner light,
with LED.
Depth:
36 mm

Hotel solutions


White

Silver

Hotel solutions

**02686**


Control device with four push buttons
1P NO 12 vdc 50 mA max., to be completed with 2-module back-lightable interchangeable button caps
- 2 modules. Depth: 15 mm

**14026.DND**
Do Not Disturb,
with diffuser**14026.PLS**
Please Clean,
with diffuser**14026.PLS.SL**
Please Clean,
with diffuser**14026.DND.SL**
Do Not Disturb,
with diffuser**14099**
Volume control,
8 Ω 15 W - 2 modules.
Depth: 29,7 mm**14097**
NO 10 A 230 V~, for hotel "Do Not Disturb" and "Please Clean" lightable - 2 modules.
Depth: 27 mm**00975**
Card to customise
for 14097 button**02685**
4 signalling indicator: IN, Do Not Disturb, OUT, waitress symbol, white - 2 modules. Depth: 22 mm**14290**
230 V~ 50/60 Hz, with 20 VA isolating transformer, 230 V~ and 120 V~ outputs - 3 modules**14290.AB**

As above,
antibacterial treatment.
Depth: 41 mm

**14291⁶**
230 V~ 50/60 Hz, with 20 VA isolating transformer, 230 V~ and 120 V~ outputs. Depth: 41 mm**14290.SL**
230 V~ 50/60 Hz, with 20 VA isolating transformer, 230 V~ and 120 V~ outputs - 3 modules.
Depth: 41 mm**14291.SL⁶**
230 V~ 50/60 Hz, with 20 VA isolating transformer, 230 V~ and 120 V~ outputs. Depth: 41 mm**02690**
Lighting switch, 2000 W incandescent lamps,
CFL 10-1000 W, LED 100 W, 220-240 V~
50/60 Hz, ceiling mounting

Hotel solutions

White	Silver
Access control system	
	
14461 Smart card reader/ programmer, 12-24 V~ 50/60 Hz/12-24 Vdc (SELV) - 3 modules. Depth: 36 mm	14461.SL Smart card reader/ programmer, 12-24 V~ 50/60 Hz/12-24 Vdc (SELV) - 3 modules. Depth: 36 mm
	
14463 Electronic switch, vertical pocket, 120-230 V~ 50/60 Hz - 2 modules. Depth: 20,5 mm	14463.SL Electronic switch, vertical pocket, 120-230 V~ 50/60 Hz - 2 modules. Depth: 20,5 mm
	
14465 Electronic switch, vertical pocket, 24 V~/24 Vdc (SELV) - 3 modules. Depth: 36 mm	14465.SL Electronic switch, vertical pocket, 24 V~/24 Vdc (SELV) - 3 modules. Depth: 36 mm
	
14468 NFC/RFID electronic reader, suitable for AGB Electronic Solutions for hotel, vertical pocket, 120-230 V~ 50/60 Hz - 3 modules. Depth: 29,5 mm	14468.SL NFC/RFID electronic reader, suitable for AGB Electronic Solutions for hotel, vertical pocket, 120-230 V~ 50/60 Hz - 3 modules. Depth: 29,5 mm
	
14468.1 NFC/RFID electronic reader, suitable for CISA Electronic Solutions for hotel, vertical pocket, 120-230 V~ 50/60 Hz - 3 modules. Depth: 30,5 mm	14468.1.SL NFC/RFID electronic reader, suitable for Mifare Electronic Solutions for hotel, vertical pocket, 120-230 V~ 50/60 Hz - 3 modules. Depth: 30,5 mm
	
14469 NFC/RFID electronic reader, suitable for Mifare Electronic Solutions for hotel, vertical pocket, 120-230 V~ 50/60 Hz - 3 modules. Depth: 30,5 mm	14469.SL NFC/RFID electronic reader, suitable for Mifare Electronic Solutions for hotel, vertical pocket, 120-230 V~ 50/60 Hz - 3 modules. Depth: 30,5 mm
	
16452 Programmable smart card	16452.S ISO-card (badge)
16452.H As above, customizable	
Bus access control system	
	
14470 Transponder card and key reader - 2 modules. Depth: 25,5 mm	14470.SL Transponder card and key reader - 2 modules. Depth: 25,5 mm
	
14471 Smart card reader and programmer - 3 modules. Depth: 36 mm	14471.SL Smart card reader and programmer - 3 modules. Depth: 36 mm
	
14472 Actuator with 3 A 30 V change-over relay output - 2 modules. Depth: 25,5 mm	14472.SL Actuator with 3 A 30 V change-over relay output - 2 modules. Depth: 25,5 mm
	
14473 Smart card programmer in table mounting box - 4 modules	14473.SL Smart card programmer in table mounting box - 4 modules
	
01816 Transponder card 01816.H As above, customizable	01400 Supply unit, 29 Vdc 400 mA output, 230 V~ 50/60 Hz, 2 x 17,5 mm modules
	
01815 Transponder key	01401 Supply unit, 29 Vdc 1280 mA output, 120-230 V~ 50/60 Hz, 8 x 17,5 mm modules
	
16452 Programmable smart card	16474 Smart card for serial connection of reader/ programmer
16452.H As above, customizable	

Call-way: hospital care system

Call-way: devices




02080.AB
Communication and call display terminal, antibacterial treatment



02081.AB
Display module in single-base, antibacterial treatment



02082.AB
Phonic module in single-base, antibacterial treatment



02085
Removable spare terminal, 8 screw terminal



02075.AB
Backlit tail call lead, 2 light controls, 2 auxiliary service controls, anti-strangle function, anti-bacterial treatment



14505.AB
Relay module with RJ45 socket outlet for tail call lead with 2 lights + 2 AUX, connection with an 8IN/8OUT module or a Call-way display, 4 24 V NO relay outputs, anti-bacterial treatment - 3 modules. Depth: 29,5 mm



02089.AB
Call keypad 2 light controls, anti-strangle, antibacterial treatment



02086
Simple mini-keyboard



02087
Simple mini-keyboard with 1 light control



02088
Simple mini-keyboard with 2 light controls



02097.1
System display, surface mounting



02098
Mounting bracket for display



02079
Ethernet/RS485 interface, 9 x 17,5 mm modules

Special switches



14501.AB
Call push button, with red reassurance indicator unit, antibacterial treatment - 2 modules. Depth: 36 mm



14502
Call push button with DIN 7-contact socket outlets - 2 modules. Depth: 37 mm



14503.AB
Cord-operated push button with red reassurance indicator unit, antibacterial treatment - 2 modules. Depth: 36 mm



14504.AB
Cancel call push button, with acoustic signalling and green indicator unit, antibacterial treatment - 2 modules. Depth: 36 mm

Prismatic indicator units - 2 modules*



14387.B
230 V~ 3 W max, white diffuser. Depth: 24 mm



14387.R
230 V~ 3 W max, red diffuser. Depth: 24 mm



14387.V
230 V~ 3 W max, green diffuser. Depth: 24 mm

Landing lamp



02084
LED landing lamp, four colours, surface mounting

* Not to be used in European Countries

▲ New article

Δ Available until stocks last

Call-way: hospital care system

Call-way: devices

Accessories and devices for DIN rail (60715 TH35)



02090.2
Power supply unit,
24 Vdc 5 A, 100-
240 V~ 50/60 Hz



02094
Line coupler with ethernet and
sound system management,
9 x 17,5 mm modules



02078
Phone coupler,
9 x 17,5 mm modules



02095
Serial interface ESPA 4.4.4,
9 x 17,5 mm modules



02096
Card with 8 inputs and 8 outputs,
8 x 17,5 mm modules

Cable



03061.E
Cat. 5e F/UTP cable, shielded,
4-pair, 24 AWG, LSZH-sheath,
CPR Eca class, suitable for I
category cables (U0 = 400 V),
grey - 305 m



03071.B2
Cat. 6 U/UTP cable, unshielded,
4-pair, 23 AWG, LSZH sheath,
CPR B2ca class, blue - 500 m



03076.E
Cat. 6 F/UTP cable, shielded,
4-pair, 23 AWG, LSZH sheath,
CPR Eca class, suitable for I
category cables (U0 = 400 V),
green - 500 m



03086.B2
Cat. 6A S/FTP cable, shielded,
4-pair, 23 AWG, LSZH sheath,
CPR B2ca class, blue - 500 m



03086.E
Cat. 6A S/FTP cable, shielded,
4-pair, 23 AWG, LSZH sheath,
CPR Eca class, suitable for I
category cables (U0 = 400 V),
orange - 500 m

Control devices with antibacterial material**



14041.AB
Blank module.
Depth: 10 mm



14001.AB
1P 1-way switch,
16 AX 250 V~.
Depth: 24 mm



14015.AB
2P 1-way switch,
16 AX 250 V~.
Depth: 24 mm



14013.AB
1P reversing
switch, 16 AX
250 V~.
Depth: 24 mm



14005.AB
1P 2-way switch,
16 AX 250 V~.
Depth: 24 mm



14008.AB
1P NO push
button,
10 A 250 V~.
Depth: 24 mm



14022.AB
2-module inter-
changeable but-
ton, no symbol



14052.AB
1P special
switch,
NO 10 A 250 V~
cord-operated.
Depth: 24 mm



14136.AB.1
MASTER dimmer,
universal, with
potentiometer.
Depth: 40,5 mm

Socket outlets with antibacterial material**



14203.AB
Bresa SICURY
2P+E 16 A 250 V~
socket, Italian
standard P17/11.
Depth: 24 mm



14210.AB
SICURY 2P+E 16 A
250 V~ socket
- 2 modules.
Depth: 25 mm



14208.AB
SICURY 2P+E 16 A
250 V~ socket,
German standard
- 2 modules.
Depth: 28,4 mm



14212.AB
SICURY 2P+E 16 A
250 V~ socket,
French standard
- 2 modules.
Depth: 25,4 mm



14203.AB.R
Bresa SICURY
2P+E 16 A 250 V~
socket, red.
Depth: 24 mm



14210.AB.A
SICURY 2P+E 16
A 250 V~ universal
socket, orange
- 2 modules.
Depth: 25 mm



14210.AB.R
SICURY 2P+E 16
A 250 V~ universal
socket, red
- 2 modules.
Depth: 25 mm



14210.AB.V
SICURY 2P+E 16
A 250 V~ universal
socket, green
- 2 modules.
Depth: 25 mm



14290.AB
Shaver socket with 20 VA
isolation transformer, output
230 V~ and 120 V~
- 3 modules.
Depth: 41 mm



14330.AB
2P 6 A 24 V (SELV)
socket for plug
01620.
Depth: 24 mm



14320.AB
RJ11 socket,
6-position
4-contact (6/4).
Depth: 32,6 mm



14339.AB.13
RJ45 socket with
Netsafe Cat. 6,
FTP connector.
Depth: 29,3 mm



14339.AB.14
RJ45 socket with
Netsafe Cat. 6,
FTP connector.
Depth: 29,3 mm



14342.AB
RJ45 socket
connector,
8-position,
8-contact (8/8).
Depth: 32,6 mm



14300.AB.01
TV-RD-SAT
5-2400 MHz
coaxial socket,
direct 1 dB.
Depth: 21,6 mm

* For 14771 and 14777 lamps

** Cover plates with antibacterial material, from page 274



Cover plates

Metal

70 Metallized bronze



71 Metallized silver



72 Metallized green




73 Metallized blue



74 Pearl nickel

Natural wood

61 Maple



62 Pear-tree



63 Cherry

Techno-polymer

01 White



02 Ivory



03 Beige



04 Cream



05 Black



25 Matt gold



31 Ash



32 Fir




33 Makoré

Reflex

40 Reflex ash



41 Reflex snow

42 Reflex air
Transparent cover plate

43 Reflex amber



44 Reflex mint



51 Reflex ruby



75.01 Pearl silver



76 Antique brass



81 Brushed aluminum



06 Granite white



20 Matt silver



21 Matt nickel



22 Matt champagne



23 Iridescent brown



24 Polished gold



45 Reflex water



46 Reflex cedar



47 Reflex emerald



48 Reflex orange



49 Reflex tobacco



50 Reflex sapphire

Note: Changes in the grain, colour or evenness of the surface of cover plates made of natural wood are a prized feature and guarantee of the material's authenticity



British standard cover plates

Metallized technopolymer

70 Metallized bronze



71 Metallized silver



72 Metallized green



73 Metallized blue

Technopolymer

01 White



02 Ivory



03 Beige



04 Cream



05 Black



06 Granite white



20 Matt silver



21 Matt nickel



22 Matt champagne



23 Iridescent brown



24 Polished gold



25 Matt gold



31 Ash



32 Fir



33 Makoré

Reflex

40 Reflex ash



41 Reflex snow




42 Reflex air



43 Reflex amber



44 Reflex mint



45 Reflex water



46 Reflex cedar



47 Reflex emerald



48 Reflex orange



49 Reflex tobacco



50 Reflex sapphire



51 Reflex ruby

German and French standard cover plates

Metallized technopolymer

26 Metallized bronze



27 Metallized silver

Technopolymer

01 White



02 Ivory



03 Beige



04 Cream



05 Black



06 Granite white



20 Matt silver



21 Matt nickel



22 Matt champagne



23 Iridescent brown



24 Polished gold



25 Matt gold

Reflex

40 Reflex ash



41 Reflex snow



42 Reflex air



43 Reflex amber



44 Reflex mint



45 Reflex water



46 Reflex cedar



47 Reflex emerald



48 Reflex orange



49 Reflex tobacco



50 Reflex sapphire



51 Reflex ruby

Cover plates guideline

	1-module	2-module	2-central-module	3-module	4-module	7-module
						
Metal						
 Metallized bronze	14641.70	14642.70	14652.70	14653.70	14654.70	14657.70
 Metallized silver	14641.71	14642.71	14652.71	14653.71	14654.71	14657.71
 Metallized green	14641.72	14642.72	14652.72	14653.72	14654.72	14657.72
 Metallized blue	14641.73	14642.73	14652.73	14653.73	14654.73	14657.73
 Pearl nickel	14641.74	14642.74	14652.74	14653.74	14654.74	14657.74
 Pearl silver	14641.75.01	14642.75.01	14652.75.01	14653.75.01	14654.75.01	14657.75.01
 Antique brass	-	14642.76	-	14653.76	14654.76	14657.76
 Brushed aluminium	14641.81	14642.81	14652.81	14653.81	14654.81	14657.81
Natural wood						
 Maple	14641.61	14642.61	-	14653.61	14654.61	14657.61
 Pear-tree	14641.62	14642.62	-	14653.62	14654.62	14657.62
 Cherry	14641.63	14642.63	-	14653.63	14654.63	14657.63
Technopolymer						
 White**	14641.01	14642.01-14642.AB.01	14652.01	14653.01-14653.AB.01	14654.01-14654.AB.01	14657.01-14657.AB.01
 Ivory	14641.02	14642.02	14652.02	14653.02	14654.02	14657.02
 Beige	14641.03	14642.03	14652.03	14653.03	14654.03	14657.03
 Cream	14641.04	14642.04	14652.04	14653.04	14654.04	14657.04
 Black	14641.05	14642.05	14652.05	14653.05	14654.05	14657.05
 Granite white	14641.06	14642.06	14652.06	14653.06	14654.06	14657.06
 Matt silver	14641.20	14642.20	14652.20	14653.20	14654.20	14657.20
 Matt nickel	14641.21	14642.21	14652.21	14653.21	14654.21	14657.21
 Matt champagne	14641.22	14642.22	14652.22	14653.22	14654.22	14657.22
 Iridescent brown	14641.23	14642.23	14652.23	14653.23	14654.23	14657.23
 Polished gold	14641.24	14642.24	14652.24	14653.24	14654.24	14657.24
 Matt gold	14641.25	14642.25	14652.25	14653.25	14654.25	14657.25
 Ash	14641.31	14642.31	14652.31	14653.31	14654.31	14657.31
 Fir	14641.32	14642.32	14652.32	14653.32	14654.32	14657.32
 Makoré	14641.33	14642.33	14652.33	14653.33	14654.33	14657.33
Reflex						
 Reflex ash	14641.40	14642.40	14652.40	14653.40	14654.40	14657.40
 Reflex snow	14641.41	14642.41	14652.41	14653.41	14654.41	14657.41
 Reflex air Trasparent cover plate	14641.42	14642.42	14652.42	14653.42	14654.42	14657.42
 Reflex amber	14641.43	14642.43	14652.43	14653.43	14654.43	14657.43
 Reflex mint	14641.44	14642.44	14652.44	14653.44	14654.44	14657.44
 Reflex water	14641.45	14642.45	14652.45	14653.45	14654.45	14657.45
 Reflex cedar	14641.46	14642.46	14652.46	14653.46	14654.46	14657.46
 Reflex emerald	14641.47	14642.47	14652.47	14653.47	14654.47	14657.47
 Reflex orange	14641.48	14642.48	14652.48	14653.48	14654.48	14657.48
 Reflex tobacco	14641.49	14642.49	14652.49	14653.49	14654.49	14657.49
 Reflex sapphire	14641.50	14642.50	14652.50	14653.50	14654.50	14657.50
 Reflex ruby	14641.51	14642.51	14652.51	14653.51	14654.51	14657.51

** .AB: antibacterial treatment

Cover plates guideline

8-module	6-module	14-module	21-module	Panel mounting 1-module	Panel mounting 2-module
					
14668.70*	-	-	-	-	-
14668.71*	-	-	-	-	-
14668.72*	-	-	-	-	-
14668.73*	-	-	-	-	-
14668.74*	-	-	-	-	-
14668.75.01*	-	-	-	-	-
-	-	-	-	-	-
-	-	-	-	-	-
-	-	-	-	-	-
14668.01	14659.01	14690.01	14691.01	14666.01	14667.01
14668.02	14659.02	14690.02	14691.02	14666.02	14667.02
14668.03	14659.03	-	-	-	-
14668.04	14659.04	-	-	-	-
14668.05	14659.05	14690.05	14691.05	14666.05	14667.05
14668.06	14659.06	-	-	-	-
14668.20	-	14690.20	14691.20	14666.20	14667.20
14668.21	-	14690.21	14691.21	14666.21	14667.21
14668.22	-	-	-	-	-
14668.23	-	-	-	-	-
14668.24	-	-	-	-	-
14668.25	-	-	-	-	-
14668.31	-	-	-	-	-
14668.32	-	-	-	-	-
14668.33	-	-	-	-	-
14668.40	-	-	-	-	-
14668.41	-	-	-	-	-
14668.42	-	-	-	-	-
14668.43	-	-	-	-	-
14668.44	-	-	-	-	-
14668.45	-	-	-	-	-
14668.46	-	-	-	-	-
14668.47	-	-	-	-	-
14668.48	-	-	-	-	-
14668.49	-	-	-	-	-
14668.50	-	-	-	-	-
14668.51	-	-	-	-	-

British standard cover plates: guideline

2-module

3-module/monobloc

5-module/monobloc

**Metallized technopolymer**

	Metallized bronze	14647.70	14648.70	14649.70
	Metallized silver	14647.71	14648.71	14649.71
	Metallized green	14647.72	14648.72	14649.72
	Metallized blue	14647.73	14648.73	14649.73

Technopolymer

	White	14647.01	14648.01	14649.01
	Ivory	14647.02	14648.02	14649.02
	Beige	14647.03	14648.03	14649.03
	Cream	14647.04	14648.04	14649.04
	Black	14647.05	14648.05	14649.05
	Granite white	14647.06	14648.06	14649.06
	Matt silver	14647.20	14648.20	14649.20
	Matt nickel	14647.21	14648.21	14649.21
	Matt champagne	14647.22	14648.22	14649.22
	Iridescent brown	14647.23	14648.23	14649.23
	Polished gold	14647.24	14648.24	14649.24
	Matt gold	14647.25	14648.25	14649.25
	Ash	14647.31	14648.31	14649.31
	Fir	14647.32	14648.32	14649.32
	Makoré	14647.33	14648.33	14649.33

Reflex

	Reflex ash	14647.40	14648.40	14649.40
	Reflex snow	14647.41	14648.41	14649.41
	Reflex air Transparent cover plate	14647.42	14648.42	14649.42
	Reflex amber	14647.43	14648.43	14649.43
	Reflex mint	14647.44	14648.44	14649.44
	Reflex water	14647.45	14648.45	14649.45
	Reflex cedar	14647.46	14648.46	14649.46
	Reflex emerald	14647.47	14648.47	14649.47
	Reflex orange	14647.48	14648.48	14649.48
	Reflex tobacco	14647.49	14648.49	14649.49
	Reflex sapphire	14647.50	14648.50	14649.50
	Reflex ruby	14647.51	14648.51	14649.51

German and French standard cover plates: guideline

2-module	2+2-module (between centres 71 mm)	2+2+2-module (between centres 71 mm)	2+2+2+2-module (between centres 71 mm)	2+2-module (between centres 57 mm)	2+2+2-module (between centres 57 mm)
					
Metallized technopolymer					
Metallized bronze	14642.26	14643.26	14644.26	14669.26	-
Metallized silver	14642.27	14643.27	14644.27	14669.27	-
Technopolymer					
White**	14642.01-14642.AB.01	14643.01-14643.AB.01	14644.01-14644.AB.01	14669.01-14669.AB.01	14645.01
Ivory	14642.02	14643.02	14644.02	14669.02	14645.02
Beige	14642.03	14643.03	14644.03	14669.03	14645.03
Cream	14642.04	14643.04	14644.04	14669.04	14645.04
Black	14642.05	14643.05	14644.05	14669.05	14645.05
Granite white	14642.06	14643.06	14644.06	14669.06	14645.06
Matt silver	14642.20	14643.20	14644.20	14669.20	14645.20
Matt nickel	14642.21	14643.21	14644.21	14669.21	14645.21
Matt champagne	14642.22	14643.22	14644.22	14669.22	14645.22
Iridescent brown	14642.23	14643.23	14644.23	14669.23	14645.23
Polished gold	14642.24	14643.24	14644.24	14669.24	14645.24
Matt gold	14642.25	14643.25	14644.25	14669.25	14645.25
Reflex					
Reflex ash	14642.40	14643.40	14644.40	14669.40	-
Reflex snow	14642.41	14643.41	14644.41	14669.41	-
Reflex air Transparent cover plate	14642.42	14643.42	14644.42	14669.42	-
Reflex amber	14642.43	14643.43	14644.43	14669.43	-
Reflex mint	14642.44	14643.44	14644.44	14669.44	-
Reflex water	14642.45	14643.45	14644.45	14669.45	-
Reflex cedar	14642.46	14643.46	14644.46	14669.46	-
Reflex emerald	14642.47	14643.47	14644.47	14669.47	-
Reflex orange	14642.48	14643.48	14644.48	14669.48	-
Reflex tobacco	14642.49	14643.49	14644.49	14669.49	-
Reflex sapphire	14642.50	14643.50	14644.50	14669.50	-
Reflex ruby	14642.51	14643.51	14644.51	14669.51	-

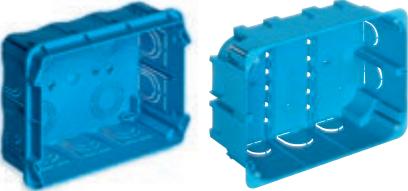

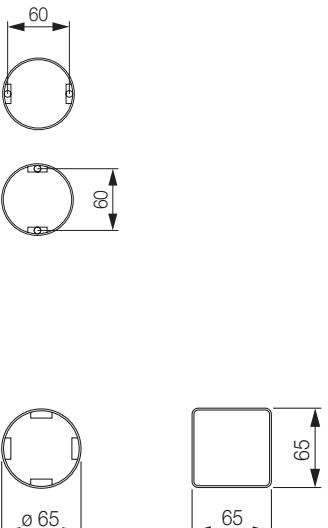


Types of mounting

Module	Box	Frame	Cover plate*
1 and 2 for Ø 60 mm mounting box	<p>Flush mounting</p>  <p>V71001 For masonry GW 650 °C, light blue V71001.AU GW 960 °C, black</p> <p>Surface mounting</p>  <p>09971.A 43,5 mm deep, RAL 9001 ivory 09971.01: white</p> <p>V71701 For hollow walls, for frame without claws, GW 850 °C, light blue</p>  <p>09972.01 30 mm deep, white</p>	  <p>14601 1-module, with claws 14601.G As above, grey</p> <p>14600 1-module, without screws 14600.G As above, grey</p>     <p>14602 2-module, with claws 14602.G As above, grey</p> <p>14603 2-module, without screws 14603.G As above, grey</p> <p>14604 2-module, with claws 14604.G As above, grey</p> <p>14605 2-module, without screws 14605.G As above, grey</p>	 <p>14641... 1-module Dimensions: 80x80x9 mm</p>   <p>14642... 2-module Dimensions: 80x80x9 mm</p> <p>14642.C.01 2-module, with cover, white Dimensions: 80x80x14 mm</p>
2 central	<p>Flush mounting</p>  <p>V71001 For masonry GW 650 °C, light blue V71001.AU GW 960 °C, black</p> <p>Surface mounting</p>  <p>09971.A 43,5 mm deep, RAL 9001 ivory 09971.01: white</p> <p>V71701 For hollow walls, for frame without claws, GW 850 °C, light blue</p>  <p>09972.01 30 mm deep, white</p> <p>V71303 For masonry GW 650 °C, light blue V71303.AU GW 960 °C, black</p> <p>V71703 For hollow walls GW 850 °C, light blue</p>  <p>09975.A 43,5 mm deep, RAL 9001 ivory 09975.01: white</p>	    <p>14602 2-module, with claws 14602.G As above, grey</p> <p>14603 2-module, without screws 14603.G As above, grey</p> <p>14604 2-module, with claws 14604.G As above, grey</p> <p>14605 2-module, without screws 14605.G As above, grey</p>  <p>14612 2-central-module, with screws</p>	  <p>14652... 2-central-module, horizontal and vertical installation, Dimensions.: 119,5x80x9 mm</p>
3	<p>Flush mounting</p>   <p>V71303 For masonry GW 650 °C, light blue V71303.AU GW 960 °C, black</p> <p>V71703 For hollow walls GW 850 °C, light blue</p> <p>Surface mounting</p>  <p>09975.A 43,5 mm deep, RAL 9001 ivory 09975.01: white</p>	 <p>14613 3-module, with screws 14613.G As above, grey</p>	 <p>14653... 3-module Dimensions.: 119,5x80x9 mm</p>




Types of mounting

Module	Box	Frame	Cover plate*
4	<p>Flush mounting</p>   <p>V71304 For masonry GW 650 °C, light blue V71304.AU GW 960 °C, black</p> <p>V71704 For hollow walls GW 850 °C, light blue</p> <p>Table mounting</p>  <p>14784 4-module, white Δ 14784.SL: Silver</p>	 <p>14614 4-module, with screws</p>	 <p>14654... 4-module Dimensions: 142x80x9 mm</p>
7	<p>Flush mounting</p>   <p>V71306 For masonry GW 650 °C, light blue V71306.AU GW 960 °C, black</p> <p>V71706 For hollow walls GW 850 °C, light blue</p> <p>Table mounting</p>  <p>14787 7-module, white Δ 14787.SL: Silver</p>	 <p>14617 7-module, with screws</p>	 <p>14657... 7-module Dimensions: 206x80x9 mm</p>
8 (4+4)	<p>Flush mounting</p>   <p>V71318 For masonry GW 650 °C, light blue V71718 For hollow walls GW 850 °C, light blue</p> <p>Table mounting</p>  <p>21848.1... Colour touch screen, 4,3" Full Flat Well-contact Plus, with built-in 8-module mounting frame</p>	 <p>01420 4,3" IP touch screen, grey 01420.B: white 01420.BN: neutral</p>  <p>14618 8-module (4+4), with screws</p>	 <p>14668... 8-module Dimensions: 142,5x151x9 mm</p>  <p>14668... 8-module Dimensions: 142,5x151x9 mm</p>
6 (3+3)	<p>Flush mounting</p>  <p>09996 For masonry, GW 650 °C, light blue 09996.AU GW 960 °C, black</p>	 <p>14619 6-module (3+3) 4x4", with screws</p>	 <p>14659... 6-module Dimensions: 120x132x11 mm</p>











Types of mounting

Module	Box	Frame	Cover plate*
14 (7+7)	<p>Flush mounting</p>  <p>V71320 For masonry GW 650 °C, light blue</p> <p>V71720 For hollow walls GW 850 °C, light blue</p> <p>Surface mounting</p>  <p>09920.01, White</p>	 <p>14620... 14-module (7+7), with screws</p>	 <p>14690... 14-module (7+7) Dimensions: 206x148x11 mm</p>
21 (7+7+7)	<p>Flush mounting</p>  <p>V71321 For masonry, GW 650 °C, light blue</p> <p>Surface mounting</p>  <p>09921.01, White</p>	 <p>14621 21-module (7+7+7), with screws</p>	 <p>14691... 21-module (7+7+7) Dimensions: 206x222x11 mm</p>
1	<p>Panel mounting</p>  <p>16776.AU GW 960 °C</p>	 <p>14626 1-module, with screws</p>	 <p>14666... 1-module Dimensions: 40x80x9 mm</p>
2	<p>Panel mounting</p>  <p>16776.AU x 2 GW 960 °C</p>	 <p>14627 2-module, with screws</p>	 <p>14667... 2-module Dimensions: 40x137x9 mm</p>
1 and 2 for \varnothing 60 and 65 mm		 <p>14601 1-module, with claws 14601.G As above, grey</p>  <p>14600 1-module, without screws 14600.G As above, grey</p>	 <p>14641... 1-module, Dimensions: 80x80x9 mm</p>
		 <p>14602 2-module, with claws 14602.G As above, grey</p>  <p>14603 2-module, without screws 14603.G As above, grey</p> <p>14604 2-module, with claws</p> <p>14605 2-module, without screws</p>	 <p>14642... 2-module, Dimensions: 80x80x9 mm</p>
		 <p>14602 2-module, with claws 14602.G As above, grey</p> <p>14603 2-module, without screws 14603.G As above, grey</p> <p>14604 2-module, with claws</p> <p>14605 2-module, without screws</p>	 <p>14652... 2-central-module Dimensions: 119,5x80x9 mm</p>






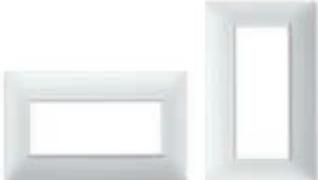
British standard mounting

Module	Box	Frames/Devices	Cover plate*		
1 and 2	Flush mounting  1-gang mounting box Fixing centres: 60,3 mm	 14606¹ 1-module, with screws M 3,5, white	 14606.SL¹ 1-module, with screws M 3,5, Silver	 14607¹ 2-module, with screws M 3,5	 14647¹... 2-module. Dimensions: 95x95x9 mm
3 and Monobloc	Flush mounting  1-gang mounting box Fixing centres: 60,3 mm	 14608¹ 3-module, with screws M 3,5	 14648¹... 3-module. For horizontal and vertical mounting. Dimensions: 95x95x9 mm		
5 and Monobloc	Flush mounting  2-gang mounting box Fixing centres: 120,6 mm	 14609¹ 5-module, with screws M 3,5	 14649¹... 5-module. For horizontal and vertical mounting. Dimensions: 155x95x9 mm		

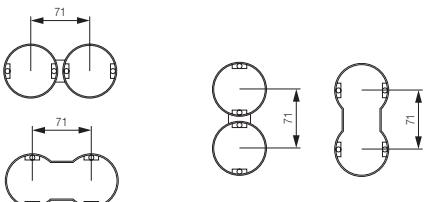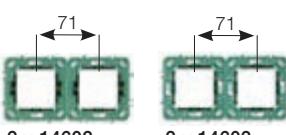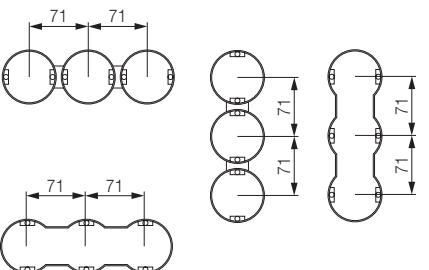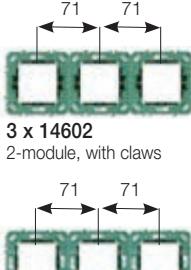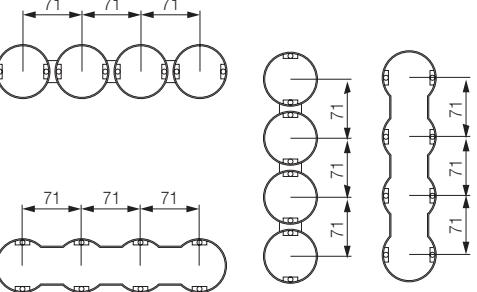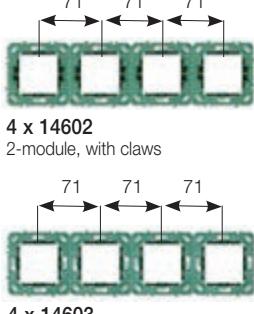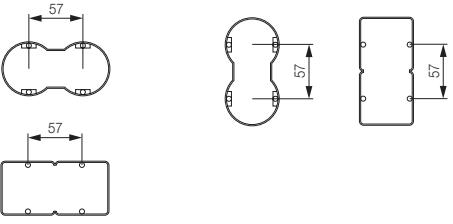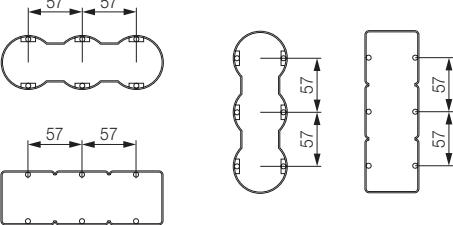71 mm and 57 mm between centres installation

Module	Box	Frame
2+2 71 mm between centres		 <p>2 x 14602 2-module, with claws 2 x 14603 2-module, without screws</p>
2+2+2 71 mm between centres		 <p>3 x 14602 2-module, with claws 3 x 14603 2-module, without screws</p>
2+2+2+2 71 mm between centres		 <p>4 x 14602 2-module, with claws 4 x 14603 2-module, without screws</p>
2+2 57 mm between centres		 <p>2 x 14605 2-module, without screws</p>
2+2+2 57 mm between centres		 <p>3 x 14605 2-module, without screws</p>


71 mm and 57 mm between centres installation

	Cover plate*	
 2 x 14602 2-module, with claws	 2 x 14603 2-module, without screws	 14643... 4 (2+2)-module, for horizontal and vertical installation. Dimensions: 150,5x80x9 mm
 3 x 14602 2-module, with claws	 3 x 14603 2-module, without screws	 14644... 6 (2+2+2)-module, for horizontal and vertical installation. Dimensions: 221,5x80x9 mm
 4 x 14602 2-module, with claws	 4 x 14603 2-module, without screws	 14669... 8 (2+2+2+2)-module, for horizontal and vertical installation. Dimensions: 293x80x9 mm
 2 x 14604 2-module, with claws	 2 x 14605 2-module, without screws	 14645... 4 (2+2)-module, for horizontal and vertical installation. Dimensions: 136,5x80x9 mm
 3 x 14604 2-module, with claws	 3 x 14605 2-module, without screws	 14646... 6 (2+2+2)-module, for horizontal and vertical installation. Dimensions: 193,5x80x9 mm

Eikon


> Cover plates and controls customisation

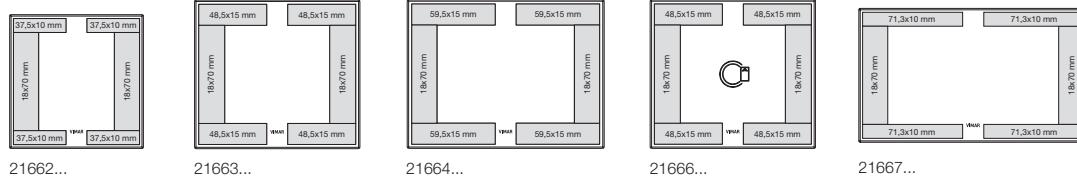Eikon Tactil cover plates: customisation positions (see area in grey)



Example of customised Eikon Tactil cover plate

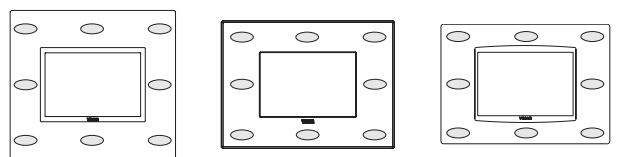Eikon Evo, Eikon Exé and Eikon Chrome cover plates: customisation positions (see area in grey)



Eikon Evo cover plate






Eikon Exé cover plate

Eikon Chrome cover plate



Example of customised Eikon Evo cover plate

Controls and buttons: positions and features

Type	Customisation position	Backlit customisation	Not backlit customisation
Conventional rocker controls 1 and 2 modules and interchangeable buttons 1, 2 and 3 modules		NO	positions 1 and 2
Buttons for conventional rocker controls 20031, 20032 and 20033		position 3 only in the 14x7 mm area	positions 1 and 2
Axial controls. 1 and 2 modules		NO	positions 1 and 2
Buttons for axial controls 20131.0, 20132.0 and 20133.0		position 2 with Mylar 14x7 mm stickers	positions 1 and 3
Pair of 1-module buttons for RF devices		NO	positions 1 and 2
2-module button for RF devices		NO	positions 1 and 2

Example of customised controls and buttons



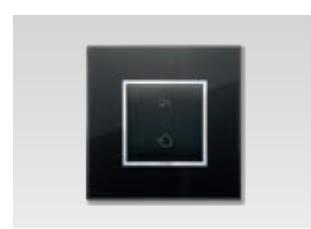
Rocker controls and customisable buttons



Buttons for axial controls with backlit customisation



Buttons for radiofrequency controls with customisation





2-module button for radiofrequency controls with customisation

CUSTOMISATION

Eikon



Controls and buttons: positions and features

Type	Customisation position	Backlit customisation	Not backlit customisation
Home automation controls. 1-module half-buttons		only in the 10x10 mm area	if the LED programming is "OFF" the whole button area can be customised
Home automation controls. 2-module half-buttons		only in the 10x10 mm area	if the LED programming is "OFF" the whole button area can be customised
Specifications for customising home automation controls with wording			
To be backlit, customisation with wording not included in the " Library of standard symbols and wording ", must have no more than 3 text rows, each with maximum 8 capital letters, font height 1.7 mm and style as per the library. Depending on the length of the text, the wording must be positioned as shown in the figures to the side.	Text on 1 row 	Text on 2 rows 	Text on 3 rows 



Home automation controls
with customisation not backlit



Home automation controls with backlit
customisation (example with text)

Indications for customisation

- all devices, buttons and cover plates are customized depending on conditions described below;
- **Eikon Tactil**
all cover plates shown in the area highlighted in grey can be customised, with the exception of the **Pearl grey** cover plate (73);
- **Eikon Evo**
the following finishings of cover plates are not customizable: **Crystal**: silver ice (72), pearl grey (73), opal brown (74), bronze mirror (75);
- **Eikon Exé**
the following finishings of cover plates are not customizable: **Marbled stoneware**: White Calacatta (51), Coffee brown (52), Black Marquina (53); **Mirrors**: Ice silver (75), Shiny bronze (76), Opal brown (77); **Glass**: Satin black (73) and **Exclusive metals**: Antique gold (85);
- **Eikon Chrome**
the following finishings of cover plates are not customizable: **Bright**: matt titanium (C14); **Glass**: black ice (C71), silver mirror (C81);
- **Wooden cover plate** customization: prices and quantities agreed with the commercial networks.
- if the required customisation is including in the "**Library of standard symbols and wording**", indicate the item code + symbol/wording code, **if the customisation is not included in the table check its feasibility with the sales network**;
- for requests for large quantities of customised items not included in the "**Library of standard symbols and wording**" please contact the Vimar sales network.

Laser customization advantages

- indelible engraving that does not deteriorate over time;
- service available even for minimal quantities;
- possibility of ordering the same customization at different times with identical results.

The few limits of technology

- it is not possible to reproduce coloured images.

What to supply

- an image in EPS or DXF format of the subject to be reproduced, minimum line width and minimum distance between lines: 0.5 mm.

How to proceed


- deliver all the documentation to your area wholesaler/distributor, who will then forward it to Vimar.

CUSTOMISATION


Eikon




Vintage controls: possible positions to customize




22672.1.xx - 1 control




22672.2.xx - 2 controls

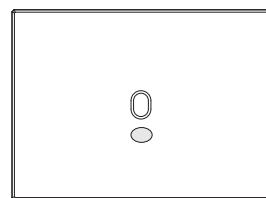

22673.1.xx - 1 control

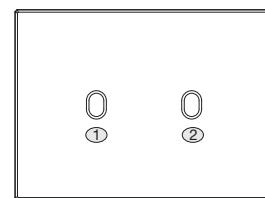


22673.2.xx - 2 controls

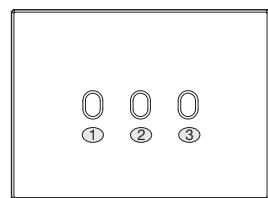


22673.3.xx - 3 controls


Flat conventional controls: possible positions to customize




22682.1.xx - 1 control




22682.2.xx - 2 controls

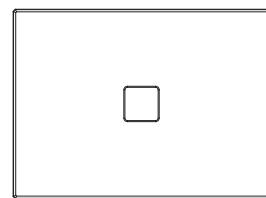

22683.1.xx - 1 control

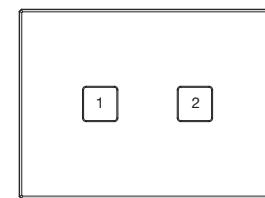


22683.2.xx - 2 controls

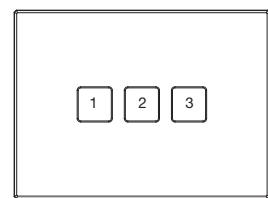


22673.3.xx - 3 controls


Flat home automation controls: possible positions to customize




22692.xx - 4 home automation controls

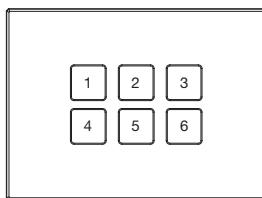

22693.xx - 6 home automation controls

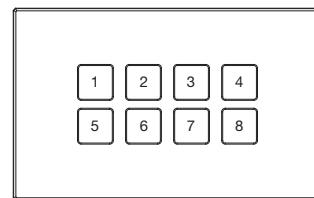

22694.xx - 8 home automation controls



22696.xx - 6 British standard home automation controls

Flat home automation controls: positions and features

Finishes	Customisation position	Backlit customisation	Not backlit customisation
01 Matt white, 03 Anthracite grey, 12 Brushed dark bronze		only in the 10x10 mm area	if the LED programming is "OFF" the whole button area can be customised
11 Brushed nickel, 82 Gold		Ask information to sales network	Ask information to sales network

Texts positions

To be backlit, customisation with wording not included in the **"Library of standard symbols and wording"**, must have no more than 3 text rows, each with maximum 8 capital letters, font height 1,7 mm and style as per the library.

Depending on the length of the text, the wording must be positioned as shown in the figures to the side.

Text on 1 row



Text on 2 rows



Text on 3 rows



Example of customised Vintage and Flat controls



Eikon Exé Vintage: customised 3-gang conventional control



Eikon Exé Flat: customised 6-gang home automation controls with RGB backlighting

Standard symbols and wordings (◆ symbols already on product catalogue)

◆ S20.001	S20.002	S20.003	S20.004	S20.005	S20.006	S20.007	S20.008	S20.009	S20.010	S20.011	S20.012	S20.013	S20.014	S20.015	S20.016	S20.017
S20.018	S20.019	S20.020	S20.021	S20.022	S20.023	S20.024	S20.025	S20.026	S20.027	S20.028	◆ S20.029	S20.030	S20.031	S20.032	S20.033	S20.034
S20.035	S20.036	S20.037	S20.038	◆ S20.039	◆ S20.040	S20.041	S20.042	S20.043	S20.044	S20.045	S20.046	S20.047	S20.048	◆ S20.049	S20.050	S20.051
◆ S20.052	◆ S20.053	◆ S20.054	◆ S20.055	◆ S20.056	◆ S20.057	◆ S20.058	◆ S20.059	◆ S20.060	S20.061	S20.062	S20.063	S20.064	S20.065	S20.066	S20.067	S20.068
S20.069	S20.070	S20.071	S20.072	◆ S20.073	◆ S20.074	S20.075	S20.076	S20.077	S20.078	S20.079	S20.080	S20.081	S20.082	S20.083	S20.084	S20.085
S20.086	S20.087	S20.088	S20.089	S20.090	S20.091	S20.092	S20.093	S20.094	S20.095	S20.096	S20.097	S20.098	S20.099	S20.100	S20.101	S20.102
S20.103	S20.104	S20.105	S20.106	S20.107	S20.108	S20.109	S20.110	S20.111	S20.112	S20.113	S20.114	S20.115	S20.116	◆ S20.117	S20.118	S20.119
S20.120	S20.121	S20.122	S20.123	S20.124	S20.125	S20.126	S20.127	S20.128	S20.129	S20.130	S20.131	S20.132	S20.133	S20.134	S20.135	S20.136
S20.137	S20.138	S20.139	S20.140	S20.141	S20.142	S20.143	S20.144	S20.145	S20.146	S20.147	S20.148	S20.149	S20.150	S20.151	S20.152	S20.153
S20.154	S20.155	S20.156	S20.157	S20.158	S20.159	S20.160	S20.161	S20.162	S20.163	S20.164	S20.165	S20.166	S20.167	S20.168	S20.169	S20.170
S20.171	S20.172	S20.173	S20.174	S20.175	S20.176	S20.177	S20.178	S20.179	S20.180	S20.181	S20.182	S20.183	S20.184	S20.185	MAKE UP ROOM	DO NOT DISTURB
LIGHT	OPEN	CLOSE	ALARM	COME IN	BACK	STAIRS	BATHROOM	CELLAR	STOREROOM	ATTIC	TERRACE	OUTSIDE	GARDEN	GARAGE	GENERAL	
S20.188.EN	S20.189.EN	S20.190.EN	S20.191.EN	S20.192.EN	S20.193.EN	S20.194.EN	S20.195.EN	S20.196.EN	S20.197.EN	S20.198.EN	S20.199.EN	S20.200.EN	S20.201.EN	S20.202	S20.203.EN	

Smart card customization

The rear of the card can be customised on request, by providing a digital image of the subject in eps, tiff or jpg format.



Bluetooth network name customisation

The name of the Bluetooth network can be customised for articles in the sound system: Bluetooth interface (20589) and stereo amplifier for speakers (20590).

What to provide

- annex a file with extension .txt to the order
- the name of the .txt file must be created as follows:

e.g. **P20590_6.txt**

P20590: required product code preceded by the letter P; '6' is the number of rows in the txt file = quantity of the required product code;

Format of the .txt file

- use standard ASCII European characters;
- name of the network to be customised, max 23 characters (including spaces);
- the text on a new line identifies the end of the string to be customised;
- the number of rows must correspond to the quantity of the required article code;
- each row must indicate the requested customisation, even when repeated.


Example of txt file compilation (e.g. P20590_6.txt)

B&B	room 1
B&B	room 2
B&B	room 3
B&B	room 4
B&B	room 5
B&B	room 6


> Cover plates and controls customisation

Cover plates: customisation positions

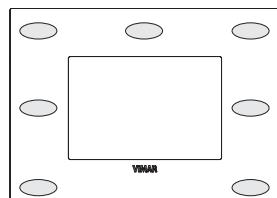
(see area in grey)



Arké fit cover plate

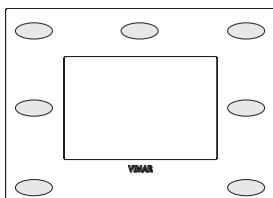

Arké Classic cover plate

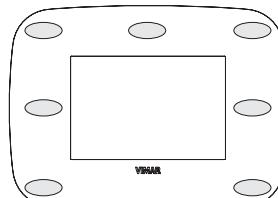

Arké Round cover plate

Example of customised cover plate



Controls and buttons: positions and features

Type	Customisation position	Backlit customisation	Not backlit customisation
Conventional rocker controls 1 and 2 modules		NO	positions 1 and 2
Buttons for conventional rocker controls. 1, 2 and 3 modules		position 3 with Mylar 12x8 mm stickers	positions 1 and 2
Axial controls. 1 and 2 modules		NO	positions 1 and 3
Buttons for axial controls. 1 and 2 modules		position 2 with Mylar 12x8 mm stickers	positions 1 and 3
Pair of 1-module buttons for RF devices		NO	positions 1 and 2
2-module button for RF devices		NO	positions 1 and 2
Home automation controls. 1-module half-buttons		only in the 10x10 mm area	if the LED programming is "OFF" the whole button area can be customised
Home automation controls. 2-module half-buttons		only in the 10x10 mm area	if the LED programming is "OFF" the whole button area can be customised

Example of customised controls and buttons



Rocker controls and buttons with backlit customisation



Axial controls and buttons with backlit customisation



Buttons for radiofrequency controls with customisation



Home automation controls with customisation not backlit



Home automation controls with backlit customisation (example with text)

Specifications for customising home automation controls with wording

To be backlit, customisation with wording not included in the **"Library of standard symbols and wording"**, must have no more than 3 text rows, each with maximum 8 capital letters, font height 1.7 mm and style as per the library. Depending on the length of the text, the wording must be positioned as shown in the figures to the side.

	Text on 1 row	Text on 2 rows	Text on 3 rows

Arké

Indications for customisation

- all devices, buttons and cover plates are customized depending on conditions described below;
- the following cover plates cannot be customised: Metal-Color: Matt graphite (.01 and .21); Metal-Elite: Gold (.07 and .27), Black chrome (.09), Black nickel (.10), Chrome (.28), Dark nickel (.29), Matt nickel (.30); Wood: larch (.43);
- wooden cover plate customisation: prices and quantities to be agreed with the sales network;
- if the required customisation is included in the 'Library of standard symbols and wording', indicate the item code + symbol/wording code, if the customisation is not included in the table check its feasibility with the sales network;
- for requests for large quantities of customised items not included in the "Library of standard symbols and wording" please contact the Vimar sales network

Laser customisation advantages

- high-precise and indelible reproduction and laser engraving over time;
- service available even for minimal quantities;
- possibility of ordering the same customisation at different times with identical results.

The few limits of technology

- it is not possible to reproduce coloured images.

What to supply

- an image in EPS or DXF format of the subject to be reproduced, minimum line width and minimum distance between lines: 0.5 mm.

How to proceed

- deliver all the documentation to your area wholesaler/distributor, who will then forward it to Vimar.

Library of standard symbols and wording (♦ symbols already on product catalogue)

◆ S19.001	S19.002	S19.003	S19.004	S19.005	S19.006	S19.007	S19.008	S19.009	S19.010	S19.011	S19.012	S19.013	S19.014	S19.015	S19.016	S19.017	
S19.018	S19.019	S19.020	S19.021	S19.022	S19.023	S19.024	S19.025	S19.026	S19.027	S19.028	◆ S19.029	S19.030	S19.031	S19.032	S19.033	S19.034	
-U-6	-U-7	-U-8	-U-9	◆ S19.038	◆ S19.039	◆ S19.040	S19.041	S19.042	S19.043	S19.044	S19.045	S19.046	S19.047	S19.048	◆ S19.049	S19.050	S19.051
◆ S19.052	◆ S19.053	◆ S19.054	◆ S19.055	◆ S19.056	◆ S19.057	◆ S19.058	◆ S19.059	◆ S19.060	S19.061	S19.062	S19.063	S19.064	S19.065	S19.066	S19.067	S19.068	
S19.069	S19.070	S19.071	S19.072	◆ S19.073	◆ S19.074	S19.075	S19.076	S19.077	S19.078	S19.079	S19.080	S19.081	S19.082	S19.083	S19.084	S19.085	
S19.086	S19.087	S19.088	S19.089	S19.090	S19.091	S19.092	S19.093	S19.094	S19.095	S19.096	S19.097	S19.098	S19.099	S19.100	S19.101	S19.102	
◆ S19.103	S19.104	S19.105	S19.106	S19.107	S19.108	S19.109	S19.110	S19.111	S19.112	S19.113	S19.114	S19.115	S19.116	◆ S19.117	S19.118	S19.119	
S19.120	S19.121	S19.122	S19.123	S19.124	S19.125	S19.126	S19.127	S19.128	S19.129	S19.130	S19.131	S19.132	S19.133	S19.134	S19.135	S19.136	
S19.137	S19.138	S19.139	S19.140	S19.141	S19.142	S19.143	S19.144	S19.145	S19.146	S19.147	S19.148	S19.149	S19.150	S19.151	S19.152	S19.153	
S19.154	S19.155	S19.156	S19.157	S19.158	S19.159	S19.160	S19.161	S19.162	S19.163	S19.164	S19.165	S19.166	S19.167	S19.168	S19.169	S19.170	
S19.171	S19.172	S19.173	S19.174	S19.175	S19.176	S19.177	S19.178	S19.179	S19.180	S19.181	S19.182	S19.183	S19.184	S19.185	S19.186	S19.187	
LIGHT	OPEN	CLOSE	ALARM	COME IN	BACK	STAIRS	BATHROOM	CELLAR	STORE ROOM	ATTIC	TERRACE	OUTSIDE	GARDEN	GARAGE	GENERAL		
S19.188.EN	S19.189.EN	S19.190.EN	S19.191.EN	S19.192.EN	S19.193.EN	S19.194.EN	S19.195.EN	S19.196.EN	S19.197.EN	S19.198.EN	S19.199.EN	S19.200.EN	S19.201.EN	S19.202	S19.203.EN		

Smart card customization

The rear of the card can be customised on request, by providing a digital image of the subject in eps, tiff or jpg format.



Bluetooth network name customisation

The name of the Bluetooth network can be customised for articles in the sound system: Bluetooth interface (19589) and stereo amplifier for speakers (19590).

What to provide

- annex a file with extension .txt to the order
- the name of the .txt file must be created as follows:

e.g. P19590_6.txt

P19590: required product code preceded by the letter P; '6' is the number of rows in the txt file = quantity of the required product code;

Format of the .txt file

- use standard ASCII European characters;
- name of the network to be customised, max 23 characters (including spaces);
- the text on a new line identifies the end of the string to be customised;
- the number of rows must correspond to the quantity of the required article code;
- each row must indicate the requested customisation, even when repeated.

Example of txt file compilation (e.g. P19590_6.txt)


B&B	room 1
B&B	room 2
B&B	room 3
B&B	room 4
B&B	room 5
B&B	room 6

Plana

➤ Cover plates and controls customisation

Cover plates: customisation positions

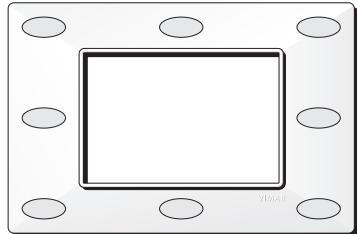(see area in grey)



Example of customised cover plate



Controls and buttons: positions and features

Type	Customisation position	Backlit customisation	Not backlit customisation	Example of customised controls and buttons
Conventional rocker controls and interchangeable buttons		position 3 ring backlit area	positions 1 and 2	
Interchangeable buttons 14021.G, 14022.G and 14023.G		position 3 ø 10 mm disc backlit area	positions 1 and 2	
Interchangeable buttons Plana Silver 14021.G.SL, 14022.G.SL and 14023.G.SL		position 1 in the 13x8,5 mm area	NO	
Pair of 1-module buttons for RF devices		NO	positions 1 and 2	
2-module button for RF devices		NO	positions 1 and 2	
Home automation controls. 1-module half-buttons		NO only backlit LED	in the programming phase it is possible to decide LED status: "OFF" or "ON" or ON with different values of brightness	
Home automation controls. 2-module half-buttons		NO only backlit LED	in the programming phase it is possible to decide LED status: "OFF" or "ON" or ON with different values of brightness	

Plana

Indications for customisation

- all devices, buttons and cover plates are customized depending on conditions described below;
- for **Plana Silver** only the following articles are customizable: **14021.G.SL, 14022.G.SL and 14023.G.SL**;
- the following cover plates cannot be customized: Technopolymer: iridescent brown (23), polished gold (24), matt gold (25), ash (31), fir (32), makoré (33); Metal: antique brass (76);
- wooden cover plate customisation: prices and quantities to be agreed with the sales network;
- if the required customisation is included in the '**Library of standard symbols and wording**', indicate the item code + symbol/wording code, if the customisation is not included in the table check its feasibility with the sales network;
- for requests for large quantities of customised items not included in the "**Library of standard symbols and wording**" please contact the Vimar sales network

Laser customisation advantages

- high-precise and indelible reproduction and laser engraving over time;
- service available even for minimal quantities;
- possibility of ordering the same customisation at different times with identical results.

The few limits of technology

- it is not possible to reproduce coloured images.

What to supply

- an image in EPS or DXF format of the subject to be reproduced, minimum line width and minimum distance between lines: 0.5 mm.

How to proceed

- deliver all the documentation to your area wholesaler/distributor, who will then forward it to Vimar.

Library of standard symbols and wording (♦ symbols already on product catalogue)

◆ S14.001	S14.002	S14.003	S14.004	S14.005	S14.006	S14.007	S14.008	S14.009	S14.010	S14.011	S14.012	S14.013	S14.014	S14.015	S14.016	S14.017
S14.018	S14.019	S14.020	S14.021	S14.022	S14.023	S14.024	S14.025	S14.026	S14.027	S14.028	♦ S14.029	S14.030	S14.031	S14.032	S14.033	S14.034
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
S14.035	S14.036	S14.037	S14.038	♦ S14.039	♦ S14.040	S14.041	S14.042	S14.043	S14.044	S14.045	S14.046	S14.047	S14.048	♦ S14.049	S14.050	S14.051
(3	((ON	OFF												
S14.052	♦ S14.053	♦ S14.054	♦ S14.055	♦ S14.056	♦ S14.057	♦ S14.058	♦ S14.059	♦ S14.060	S14.061	S14.062	S14.063	S14.064	S14.065	S14.066	S14.067	S14.068
S14.069	S14.070	S14.071	S14.072	♦ S14.073	♦ S14.074	S14.075	S14.076	S14.077	S14.078	S14.079	S14.080	S14.081	S14.082	S14.083	S14.084	S14.085
S14.086	S14.087	S14.088	S14.089	S14.090	S14.091	S14.092	S14.093	S14.094	S14.095	S14.096	S14.097	S14.098	S14.099	S14.100	S14.101	S14.102
S14.103	S14.104	S14.105	S14.106	S14.107	S14.108	S14.109	S14.110	S14.111	S14.112	S14.113	S14.114	S14.115	S14.116	♦ S14.117	S14.118	S14.119
S14.120	S14.121	S14.122	S14.123	S14.124	S14.125	S14.126	S14.127	S14.128	S14.129	S14.130	S14.131	S14.132	S14.133	S14.134	S14.135	S14.136
S14.137	S14.138	S14.139	S14.140	S14.141	S14.142	S14.143	S14.144	S14.145	S14.146	S14.147	S14.148	S14.149	S14.150	S14.151	S14.152	S14.153
S14.154	S14.155	S14.156	S14.157	S14.158	S14.159	S14.160	S14.161	S14.162	S14.163	S14.164	S14.165	S14.166	S14.167	S14.168	S14.169	S14.170
S14.171	S14.172	S14.173	S14.174	S14.175	S14.176	S14.177	S14.178	S14.179	S14.180	S14.181	S14.182	S14.183	S14.184	S14.185	S14.186	S14.187
light	open	close	alarm	come in	back	stairs	bathroom	cellar	storeroom	attic	terrace	outside	garden	garage	general	
S14.188.EN	S14.189.EN	S14.190.EN	S14.191.EN	S14.192.EN	S14.193.EN	S14.194.EN	S14.195.EN	S14.196.EN	S14.197.EN	S14.198.EN	S14.199.EN	S14.200.EN	S14.201.EN	S14.202	S14.203.EN	

Smart card customization

The rear of the card can be customised on request, by providing a digital image of the subject in eps, tiff or jpg format.

Hotel Europa



Hotel Castello di Giuliano



Bluetooth network name customisation

The name of the Bluetooth network can be customised for articles in the sound system: Bluetooth interface (14589) and stereo amplifier for speakers (14590).

What to provide

- annex a file with extension .txt to the order
- the name of the .txt file must be created as follows:

e.g. **P14590_6.txt**

P14590: required product code preceded by the letter P; '6' is the number of rows in the txt file = quantity of the required product code;

Format of the .txt file

- use standard ASCII European characters;
- name of the network to be customised, max 23 characters (including spaces);
- the text on a new line identifies the end of the string to be customised;
- the number of rows must correspond to the quantity of the required article code;
- each row must indicate the requested customisation, even when repeated.

Example of txt file compilation
(e.g. P14590_6.txt)

B&B	room 1
B&B	room 2
B&B	room 3
B&B	room 4
B&B	room 5
B&B	room 6

Wiring devices.

Catalogue

Catalogue section

SYSTEMS



Smart home View Wireless	294
By-me Plus: smart automation	300
Well-contact Plus: building automation	316
By-alarm: burglar alarm system	326



ENCLOSURES AND BOXES	332
-----------------------------	-----

Smart home View Wireless

EIKON

ARKÉ

PLANA

View Wireless connected 2-way switches kits



▲OK19592.01

Kit with:

- 1 19592.0 2-way switch mechanism
- 1 19022.B 2-module interchangeable button, white
- 1 19607 2-module British standard mounting frame
- 1 19603 2-module mounting frame without screws
- 1 19642.74 2-module technopolymer Classic cover plate, white



Bluetooth®

zigbee
certified product



▲OK19592.02

Kit with:

- 1 19592.0 2-way switch mechanism
- 1 19022 2-module interchangeable button, grey
- 1 19607 2-module British standard mounting frame
- 1 19603 2-module mounting frame without screws
- 1 19642.71 2-module technopolymer Classic cover plate, black



Bluetooth®

zigbee
certified product

Gateway



20597

View Wireless gateway,
Bluetooth® wireless
technology 4.2 Wi-Fi, 100-
240 V 50/60 Hz power
supply, grey - 2 moduli.
Depth: 37 mm



20597.B

View Wireless gateway,
Bluetooth® wireless
technology 4.2 Wi-Fi, 100-
240 V 50/60 Hz power
supply, white - 2 moduli.
Depth: 37 mm



19597

View Wireless gateway,
Bluetooth® wireless
technology 4.2 Wi-Fi, 100-
240 V 50/60 Hz power
supply, grey - 2 moduli.
Depth: 36,7 mm



19597.B

View Wireless gateway,
Bluetooth® wireless
technology 4.2 Wi-Fi, 100-
240 V 50/60 Hz power
supply, white - 2 moduli.
Depth: 36,7 mm



14597

View Wireless gateway,
Bluetooth® wireless
technology 4.2 Wi-Fi, 100-
240 V 50/60 Hz power
supply, silver - 2 moduli.
Depth: 36 mm



14597.SL

View Wireless gateway,
Bluetooth® wireless
technology 4.2 Wi-Fi, 100-
240 V 50/60 Hz power
supply, silver - 2 moduli.
Depth: 36 mm



20597.N

View Wireless gateway,
Bluetooth® wireless technology
4.2 Wi-Fi, 100-240 V 50/60 Hz
power supply, Next
- 2 moduli. Depth: 37 mm



19597.M

View Wireless gateway,
Bluetooth® wireless technology
4.2 Wi-Fi, 100-240 V 50/60 Hz
power supply, Metal
- 2 moduli. Depth: 36,7 mm

View Wireless connected actuator - backside installation



▲03981

Control device with NO 100-240 V 50/60 Hz relay
output for 500 W incandescent lamps, 100 W LED
lamps, 250 VA electronic transformers, 120 W
fluorescent lamps, remote control, 1 input for wired
control to recall a scenario, Bluetooth® wireless
technology 5.0 for View Wireless mesh system and
Zigbee 3.0, flush mounting (retrofit)

Bluetooth®

zigbee
certified product

Smart home View Wireless

EIKON

ARKÉ

PLANA

View Wireless connected 2-way switches



Bluetooth®

zigbee

certified product

20592.0

Mechanism, 100-240 V 50/60 Hz relay output for 500 W incandescent lamps, 100 W LED lamps, 250 VA electronic transformers, 120 W fluorescent lamps, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, 1 input for actuator push button or recall a scenario. To complete with 1-, 2- or 3-module buttons. Depth: 37,5 mm



Bluetooth®

zigbee

certified product

19592.0

Mechanism, 100-240 V 50/60 Hz relay output for 500 W incandescent lamps, 100 W LED lamps, 250 VA electronic transformers, 120 W fluorescent lamps, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, 1 input for actuator push button or recall a scenario. To complete with 1-, 2- or 3-module buttons. Depth: 36,5 mm



Bluetooth®

zigbee

certified product

14592.0

Mechanism, 100-240 V 50/60 Hz relay output for 500 W incandescent lamps, 100 W LED lamps, 250 VA electronic transformers, 120 W fluorescent lamps, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, 1 input for actuator push button or recall a scenario. To complete with 1-, 2- or 3-module buttons. Depth: 36,5 mm

1-module interchangeable buttons for connected switch mechanism (lightable°)



20021
No symbol,
grey



20021.B
No symbol,
white



20021.N
No symbol,
Next



19021
No symbol,
grey



19021.B
No symbol,
white



19021.M
No symbol,
Metal



14021
No symbol,
white



14021.SL
No symbol,
Silver



20021.L
Light symbol,
grey



20021.L.B
Light symbol,
white



20021.L.N
Light symbol,
Next



19021.L
Light symbol,
grey



19021.L.B
Light symbol,
white



19021.L.M
Light symbol,
Metal



14021.L
Light symbol,
white



14021.L.SL
Light symbol,
Silver



20021.P
Key symbol,
grey



20021.P.B
Key symbol,
white



20021.P.N
Key symbol,
Next



19021.P
Key symbol,
grey



19021.P.B
Key symbol,
white



19021.P.M
Key symbol,
Metal



14021.P
Key symbol,
white



14021.P.SL
Key symbol,
Silver



20026
With diffuser,
grey



20026.B
With diffuser,
white



20026.N
With diffuser,
Next



19026
With diffuser,
grey



19026.B
With diffuser,
white



19026.M
With diffuser,
Metal



14026
With diffuser,
white



14026.SL
With diffuser,
Silver



20026.PLS
Please Clean with
diffuser,
grey



20026.PLS.B
Please Clean with
diffuser,
white



20026.PLS.N
Please Clean with
diffuser,
Next



19026.PLS
Please Clean with
diffuser,
grey



19026.PLS.B
Please Clean with
diffuser,
white



19026.PLS.M
Please Clean with
diffuser,
Metal



14026.PLS
Please Clean with
diffuser,
white



14026.PLS.SL
Please Clean with
diffuser,
Silver



20026.DND
Do Not Disturb
with diffuser,
grey



20026.DND.B
Do Not Disturb
with diffuser,
white



20026.DND.N
Do Not Disturb
with diffuser,
Next



19026.DND
Do Not Disturb
with diffuser,
grey



19026.DND.B
Do Not Disturb
with diffuser,
white



19026.DND.M
Do Not Disturb
with diffuser,
Metal



14026.DND
Do Not Disturb
with diffuser,
white



14026.DND.SL
Do Not Disturb
with diffuser,
Silver

Smart home View Wireless



EIKON

ARKÉ


PLANA

1-module interchangeable buttons for connected switch mechanism (lightable°)

							
20031 Customizable, grey	20031.B Customizable, white	20031.N Customizable, Next	19031 Customizable, grey	19031.B Customizable, white	19031.M Customizable, Metal	14021.G Customizable, white	14021.G.SL Customizable, Silver

				
19038 Smooth, non-lightable, grey	19038.B Smooth, non-lightable, white	19038.M Smooth, non-lightable, Metal	14029 With name plate, white	14029.SL With name plate, Silver

2-module interchangeable buttons for connected switch mechanism (lightable°)

								
20022 No symbol, grey	20022.B No symbol, white	20022.N No symbol, Next	19022 No symbol, grey	19022.B No symbol, white	19022.M No symbol, Metal	14022 No symbol, white	14022.AB No symbol, with antibacterial treatment, white	14022.SL No symbol, Silver
								
20022.L Light symbol, grey	20022.L.B Light symbol, white	20022.L.N Light symbol, Next	19022.L Light symbol, grey	19022.L.B Light symbol, white	19022.L.M Light symbol, Metal	14022.L Light symbol, white	14022.L.SL Light symbol, Silver	
								
20022.P Key symbol, grey	20022.P.B Key symbol, white	20022.P.N Key symbol, Next	19022.P Key symbol, grey	19022.P.B Key symbol, white	19022.P.M Key symbol, Metal	14022.P Key symbol, white	14022.P.SL Key symbol, Silver	
								
20027 With diffuser, grey	20027.B With diffuser, white	20027.N With diffuser, Next	19027 With diffuser, grey	19027.B With diffuser, white	19027.M With diffuser, Metal	14027 With diffuser, white	14027.SL With diffuser, Silver	
								
20032 Customizable, grey	20032.B Customizable, white	20032.N Customizable, Next	19032 Customizable, grey	19032.B Customizable, white	19032.M Customizable, Metal	14022.G Customizable, white	14022.G.SL Customizable, Silver	

* Not to be used in European Countries

▲ New article

Δ Available until stocks last

Smart home View Wireless

EIKON

ARKÉ

PLANA

3-module interchangeable buttons for connected switch mechanism (lightable[°])



20023
No symbol,
grey



20023.B
No symbol,
white



19023
No symbol,
grey



19023.B
No symbol,
white




14023
No symbol,
white



14023.SL
No symbol,
Silver



20023.N
No symbol,
Next



19023.M
No symbol,
Metal



14028
With diffuser,
white



14028.SL
With diffuser,
Silver



20028
With diffuser,
grey



20028.B
With diffuser,
white



19028
With diffuser,
grey



19028.B
With diffuser,
white



14028
With diffuser,
white



14028.SL
With diffuser,
Silver



20028.N
With diffuser,
Next



19028.M
With diffuser,
Metal



14023.G
Customizable,
white



14023.G.SL
Customizable,
Silver



20033
Customizable,
grey



20033.B
Customizable,
white



19033
Customizable,
grey



19033.B
Customizable,
white



14023.G
Customizable,
white



14023.G.SL
Customizable,
Silver



20033.N
Customizable,
Next



19033.M
Customizable,
Metal

Smart home View Wireless

[EIKON](#)
[ARKÉ](#)
[PLANA](#)

View Wireless connected actuator for 1 roller shutter - backside installation


Bluetooth®
zigbee
certified product

▲03982

Actuator for 1 roller shutter with slat orientation and change-over relay output for cosφ 0,6 motor 2 A 100-240 V~ 50/60 Hz, remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, flush mounting (retrofit)

View Wireless connected device for 1 roller shutter


Bluetooth®
zigbee
certified product

20594.0

With slat orientation and change-over relay output for cosφ 0,6 motor 2 A 100-240 V~ 50/60 Hz, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, 1 input for external push button to recall a scenario, favourite position recall function.
To complete with 2 1-module half-button.
Depth: 37,5 mm


Bluetooth®
zigbee
certified product

19594.0

With slat orientation and change-over relay output for cosφ 0,6 motor 2 A 100-240 V~ 50/60 Hz, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, 1 input for external push button to recall a scenario, favourite position recall function.
To complete with 2 1-module half-button.
Depth: 36,5 mm


Bluetooth®
zigbee
certified product

14594.0

With slat orientation and change-over relay output for cosφ 0,6 motor 2 A 100-240 V~ 50/60 Hz, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, 1 input for external push button to recall a scenario, favourite position recall function.
To complete with 2 1-module half-button.
Depth: 36,5 mm

Interchangeable 1-module half-buttons for View Wireless devices


20755.2

Arrows symbol, grey


20755.2.B

Arrows symbol, white


20755.2.N

Arrows symbol, Next


19755.2

Arrows symbol, grey


19755.2.B

Arrows symbol, white


19755.2.M

Arrows symbol, Metal


14755.2

Arrows symbol, white


14755.2.SL

Arrows symbol, Silver

Smart home View Wireless

EIKON

ARKÉ

PLANA

View Wireless connected control device for socket outlet



20593

Control device with NO 16 A 100-240 V~ 50/60 Hz relay output, local control with push button or remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, function for measuring the instant power and load cut-off threshold, grey. Depth: 39,5 mm

certified product



20593.B

Control device with NO 16 A 100-240 V~ 50/60 Hz relay output, local control with push button or remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, function for measuring the instant power and load cut-off threshold, white. Depth: 39,5 mm

certified product

20593.N

Control device with NO 16 A 100-240 V~ 50/60 Hz relay output, local control with push button or remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, function for measuring the instant power and load cut-off threshold, Next. Depth: 39,5 mm



19593

Control device with NO 16 A 100-240 V~ 50/60 Hz relay output, local control with push button or remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, function for measuring the instant power and load cut-off threshold, grey. Depth: 39 mm

certified product



19593.B


Control device with NO 16 A 100-240 V~ 50/60 Hz relay output, local control with push button or remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, function for measuring the instant power and load cut-off threshold, white. Depth: 39 mm

certified product

certified product

19593.M

Control device with NO 16 A 100-240 V~ 50/60 Hz relay output, local control with push button or remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, function for measuring the instant power and load cut-off threshold, Metal. Depth: 39 mm



14593

Control device with NO 16 A 100-240 V~ 50/60 Hz relay output, local control with push button or remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, function for measuring the instant power and load cut-off threshold, grey. Depth: 39,5 mm

certified product



14593.SL

Control device with NO 16 A 100-240 V~ 50/60 Hz relay output, local control with push button or remote control, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, function for measuring the instant power and load cut-off threshold, Silver. Depth: 38,5 mm

View Wireless connected energy meter



certified product


▲02963

Energy meter for measuring of consumption/production of instant and historical electric energy (hourly, daily, monthly and in the year mode), 1 input for supplied toroidal current sensor, detectable power 25 W-100 kW, single-phase power supply 100-240 V 50/60 Hz, Bluetooth® wireless technology 5.0 for View Wireless mesh system and Zigbee 3.0, occupies 1 17,5 mm module

Supervision


**01425**

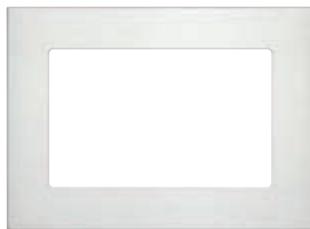10" IP colour touch screen, used as a home automation system supervisor, IP/Due Fili Plus internal video entryphone, IP video camera and CCTV system manager, power supply PoE or 12-30 Vdc, surface mounting with bracket on round, 3-module (horizontal or vertical), 8-module (4+4) or Britisch standard square mounting box, black

**21665.11**

Aluminium

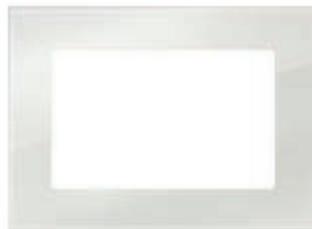Dimensions: 345x250 mm

**21665.70**

White diamond

Dimensions: 345x250 mm

**21665.76**

Black diamond

Dimensions: 345x250 mm

**01422**

Touch screen with 7" IP capacitive colour display, used as a home automation system supervisor, IP/Due Fili Plus internal video entryphone, IP video camera and CCTV system manager, power supply PoE or 12-30 Vdc, surface mounting with bracket on round, 3-module (horizontal or vertical), 8-module (4+4) or Britisch standard square mounting box, black

**01422.B**

Touch screen with 7" IP capacitive colour display, used as a home automation system supervisor, IP/Due Fili Plus internal video entryphone, IP video camera and CCTV system manager, power supply PoE or 12-30 Vdc, surface mounting with bracket on round, 3-module (horizontal or vertical), 8-module (4+4) or Britisch standard square mounting box, white

**01420**

Touch screen with 4,3" IP capacitive colour display, used as a home automation system supervisor, IP/Due Fili Plus internal video entryphone, IP video camera and CCTV system manager, power supply PoE or 12-30 Vdc, with built-in 8 (4+4)-module mounting frame, to be completed with Eikon, Arké or Plana cover plate, black

**01420.B**

Touch screen with 4,3" IP capacitive colour display, used as a home automation system supervisor, IP/Due Fili Plus internal video entryphone, IP video camera and CCTV system manager, power supply PoE or 12-30 Vdc, with built-in 8 (4+4)-module mounting frame, to be completed with Eikon, Arké or Plana cover plate, white

**01420.BN**

Touch screen with 4,3" IP capacitive colour display, used as a home automation system supervisor, IP/Due Fili Plus internal video entryphone, IP video camera and CCTV system manager, power supply PoE or 12-30 Vdc, with built-in 8 (4+4)-module mounting frame, to be completed with Eikon, Arké or Plana cover plate, neutral

By-me Plus: smart automation

EIKON

ARKÉ

PLANA

IP gateway and infrastructure devices



App VIEW and VIEW Pro**

01410

IoT gateway for By-me Plus home automation system, via IP/LAN network, Cloud and app for smartphone, tablet, PC or IP supervision touch screens, **light version** for max 32 devices, 4 x 17,5 mm modules



App VIEW and VIEW Pro**

01411

IoT gateway for By-me Plus home automation system, via IP/LAN network, Cloud and app for smartphone, tablet, PC or IP supervision touch screens, 4 x 17,5 mm modules



App VIEW and VIEW Pro**

01415


IoT gateway for Due Fili Plus video door entry system with IP/LAN network, Cloud and App for smartphone, tablet, PC or supervision touch screens, 6 x 17,5 mm modules



App VIEW and VIEW Pro**

01416

IoT router for IP video door entry system with IP/LAN network, Cloud and App for smartphone, tablet, PC or IP supervision touch screens, 4 x 17,5 mm modules



App VIEW and VIEW Pro**

01712.1

IoT gateway for By-alarm burglar alarm system with IP/LAN, Cloud and App for smartphone, tablet, PC or touch screen supervisor



01831.1

Supply unit 12 Vdc
1250 mA output,
100-240 V~
50/60 Hz, 1 x
17,5 mm module

Wi-Fi access point



20195

Wi-Fi 72,2 Mb/s access point with 2 10-100 Mb/s LAN ports, input for remote Wi-Fi radio on/off push button, supply voltage 230 V~ 50/60 Hz, grey - 2 modules. Depth: 41 mm



20195.B

Wi-Fi 72,2 Mb/s access point with 2 10-100 Mb/s LAN ports, input for remote Wi-Fi radio on/off push button, supply voltage 230 V~ 50/60 Hz, white - 2 modules. Depth: 41 mm



19195

Wi-Fi 72,2 Mb/s access point with 2 10-100 Mb/s LAN ports, input for remote Wi-Fi radio on/off push button, supply voltage 230 V~ 50/60 Hz, grey - 2 modules. Depth: 40,7 mm



19195.B

Wi-Fi 72,2 Mb/s access point with 2 10-100 Mb/s LAN ports, input for remote Wi-Fi radio on/off push button, supply voltage 230 V~ 50/60 Hz, white - 2 modules. Depth: 40,7 mm



14195

Wi-Fi 72,2 Mb/s access point with 2 10-100 Mb/s LAN ports, input for remote Wi-Fi radio on/off push button, supply voltage 230 V~ 50/60 Hz, white - 2 modules. Depth: 40 mm



14195.SL

Wi-Fi 72,2 Mb/s access point with 2 10-100 Mb/s LAN ports, input for remote Wi-Fi radio on/off push button, supply voltage 230 V~ 50/60 Hz, Silver - 2 modules. Depth: 40 mm



20195.N

Wi-Fi 72,2 Mb/s access point with 2 10-100 Mb/s LAN ports, input for remote Wi-Fi radio on/off push button, supply voltage 230 V~ 50/60 Hz, Next - 2 modules. Depth: 41 mm



19195.M

Wi-Fi 72,2 Mb/s access point with 2 10-100 Mb/s LAN ports, input for remote Wi-Fi radio on/off push button, supply voltage 230 V~ 50/60 Hz, Metal - 2 modules. Depth: 40,7 mm

EIKON

ARKÉ

PLANA

Infrastructure devices



01468
Logic unit for logic, mathematical, timing and messaging functions, 1 x 17,5 mm modules



01400
Supply unit, 29 Vdc 400 mA output, 230 V~ 50/60 Hz, 2 x 17,5 mm modules



01401
Supply unit, 29 Vdc 1280 mA output, 120-230 V~ 50/60 Hz, 8 x 17,5 mm modules



01830
Supply unit 12 Vdc output, 120-230 V~ 50/60 Hz, 4 x 17,5 mm modules



01845.1
Line coupler, 2 x 17,5 mm modules

Cables and accessories



01840.C
Bus system cable, 2x0,50 mm², with LSZH sheath, CPR Cca s1b d1 a1 class, suitable for I category cables (U0 = 400 V), yellow - 100 m



01840.E
Bus system cable, 2x0,50 mm², with LSZH sheath, CPR Eca class, suitable for I category cables (U0 = 400 V), white - 100 m



01841.E
Bus system cable, 2x0,50 mm², shielded, with LSZH sheath, CPR Eca class, suitable for I category cables (U0 = 400 V), for marine application, white - 100 m



01839
Removable 2 screw terminals, for Bus system

Flush mounting supply units



20580
Supply unit, 32 Vdc 100 mA output, 110-230 V~ 50/60 Hz, grey. Depth: 40 mm



20580.B
Supply unit, 32 Vdc 100 mA output, 110-230 V~ 50/60 Hz, white. Depth: 40 mm



20580.N
Supply unit, 32 Vdc 100 mA output, 110-230 V~ 50/60 Hz, Next. Depth: 40 mm



19580
Supply unit, 32 Vdc 100 mA output, 110-230 V~ 50/60 Hz, grey. Depth: 40 mm



19580.B
Supply unit, 32 Vdc 100 mA output, 110-230 V~ 50/60 Hz, white. Depth: 40 mm



19580.M
Supply unit, 32 Vdc 100 mA output, 110-230 V~ 50/60 Hz, Metal. Depth: 40 mm



14580
Supply unit, 32 Vdc 100 mA output, 110-230 V~ 50/60 Hz, white. Depth: 39 mm




14580.SL
Supply unit, 32 Vdc 100 mA output, 110-230 V~ 50/60 Hz, Silver. Depth: 39 mm

Control and functions

Eikon Tactil controls



▲ 21520.1
4 independent push buttons or 2 rocker buttons, 4 independent RGB LEDs - 2 modules. Depth: 38 mm



▲ 21540.1
6 independent push buttons or 3 rocker buttons, 6 independent RGB LEDs - 3 modules. Depth: 38 mm



21847
8 stickers sheets with symbols and words for customization of standard function for Eikon Tactil controls



21847.1
4 sheets with labels featuring symbols and wording for external/internal hotel room or cabin functions for Eikon Tactil controls



21847.2
4 stickers sheets with symbols and words for customization of standard function for Eikon Tactil controls

Control and functions

Eikon Exé Flat controls



01480.AX
4-button, visible in
darkness with RGB LED
brightness adjustment
- 2 modules
Depth: 21,5 mm



01485.AX
6-button, visible in
darkness with RGB LED
brightness adjustment
- 3 modules
Depth: 21,5 mm

Interchangeable half-buttons for Eikon Exé Flat controls - 1 module



22751.01
No symbol,
white



22751.03
No symbol,
grey



22751.11
No symbol,
nickel



22751.12
No symbol,
bronze



22751.82
No symbol,
gold



22751.0.01
No symbol,
customisable²,
white



22751.0.03
No symbol,
customisable²,
grey



22751.0.11
No symbol,
customisable²,
nickel



22751.0.12
No symbol,
customisable²,
bronze



22751.0.82
No symbol,
customisable²,
gold



22751.1.01
ON/OFF,
white



22751.1.03
ON/OFF,
grey



22751.1.11
ON/OFF,
nickel



22751.1.12
ON/OFF,
bronze



22751.1.82
ON/OFF,
gold



22751.2.01
Arrows,
white



22751.2.03
Arrows,
grey



22751.2.11
Arrows,
nickel



22751.2.12
Arrows,
bronze



22751.2.82
Arrows,
gold



22751.3.01
Regulation,
white



22751.3.03
Regulation,
grey



22751.3.11
Regulation,
nickel



22751.3.12
Regulation,
bronze



22751.3.82
Regulation,
gold

By-me Plus: smart automation

EIKON

ARKÉ

PLANA

Control and functions

Eikon, Arké and Plana controls



01480
4-button - 2 modules

01480.TR

As above,
tropicalized.
Depth: 20 mm



01481
4-button + NO 16 A
120-240 V~ 50/60 Hz
relay output - 2 modules.
Depth: 37 mm



01482
4-button + actuator for
laths orientation, with relay
output for $\cos\phi$ 0.6 2 A
120-240 V~ 50/60 Hz
motor - 2 modules.
Depth: 37 mm



01485
6-button - 3 modules

01485.TR

As above,
tropicalized.
Depth: 20 mm



01486
6-button + NO 16 A
120-240 V~ 50/60 Hz
relay output - 3 modules
Depth: 37 mm



01487
6-button + actuator for
laths orientation, with relay
output for $\cos\phi$ 0.6 2 A
120-240 V~ 50/60 Hz
motor - 3 modules.
Depth: 37 mm



01488
4-button + 240 V~ 50/60 Hz
cutting-edge dimmer for
40-200 W incandescent lamps,
40-300 VA at 240 V~ and
20-150 VA at 120 V~ electro-
nic transformers, 10-200 W at
240 V~, 5-100 W at 120 V~
CFL lamps, 3-200 W at
240 V~, 3-100 W at 120 V~
LED lamps, RGB LED loca-
tion in darkness with bright-
ness control - 2 modules.
Depth: 37 mm



01489
4-button, 1 0/1-10 V
SELV output, 1 NO 2 A
120-240 V~ 50/60 Hz
relay output for ballast
and LED driver, visible in
darkness with RGB LED
brightness adjustment
- 2 modules.
Depth: 37 mm

Interchangeable half-buttons for controls - 1 module



20751
No symbol, custo-
misable', grey



20751.B
No symbol, custo-
misable', white



20751.N
No symbol, custo-
misable', Next



19751
No symbol, custo-
misable', grey



19751.B
No symbol, custo-
misable', white



19751.M
No symbol, custo-
misable', Metal



14751
No symbol, custo-
misable', white



14751.SL
No symbol, custo-
misable', Silver



20751.0
Fixed, grey



20751.0.B
Fixed, white



20751.0.N
Fixed, Next



19751.0
Fixed, grey



19751.0.B
Fixed, white



19751.0.M
Fixed, Metal



14751.0
Fixed, white



14751.0.SL
Fixed, Silver



20751.1
ON/OFF, grey



20751.1.B
ON/OFF, white



20751.1.N
ON/OFF, Next



19751.1
ON/OFF, grey



19751.1.B
ON/OFF, white



19751.1.M
ON/OFF, Metal



14751.1
ON/OFF, white



14751.1.SL
ON/OFF, Silver

By-me Plus: smart automation

EIKON

ARKÉ

PLANA

Control and functions

Interchangeable half-buttons for controls - 1 module




							
20751.2 Arrows, grey	20751.2.B Arrows, white	20751.2.N Arrows, Next	19751.2 Arrows, grey	19751.2.B Arrows, white	19751.2.M Arrows, Metal	14751.2 Arrows, white	14751.2.SL Arrows, Silver

							
20751.3 Regulation, grey	20751.3.B Regulation, white	20751.3.N Regulation, Next	19751.3 Regulation, grey	19751.3.B Regulation, white	19751.3.M Regulation, Metal	14751.3 Regulation, white	14751.3.SL Regulation, Silver

Interchangeable half-buttons for controls - 2 modules

							
20752 No symbol, customisable ¹ , grey	20752.B No symbol, customisable ¹ , white	20752.N No symbol, customisable ¹ , Next	19752 No symbol, customisable ¹ , grey	19752.B No symbol, customisable ¹ , white	19752.M No symbol, customisable ¹ , Metal	14752 No symbol, customisable ¹ , white	14752.SL No symbol, customisable ¹ , Silver

							
20752.1 ON/OFF, grey	20752.1.B ON/OFF, white	20752.1.N ON/OFF, Next	19752.1 ON/OFF, grey	19752.1.B ON/OFF, white	19752.1.M ON/OFF, Metal	14752.1 ON/OFF, white	14752.1.SL ON/OFF, Silver

							
20752.2 Arrows, grey	20752.2.B Arrows, white	20752.2.N Arrows, Next	19752.2 Arrows, grey	19752.2.B Arrows, white	19752.2.M Arrows, Metal	14752.2 Arrows, white	14752.2.SL Arrows, Silver

							
20752.3 Regulation, grey	20752.3.B Regulation, white	20752.3.N Regulation, Next	19752.3 Regulation, grey	19752.3.B Regulation, white	19752.3.M Regulation, Metal	14752.3 Regulation, white	14752.3.SL Regulation, Silver

¹ For the customisation of the buttons, see page 285

EIKON

ARKÉ

PLANA

Control and functions

Detectors



20485
Passive infrared motion detector, grey.
Depth: 26,5 mm



20485.B
Passive infrared motion detector, white.
Depth: 26,5 mm



19485
Passive infrared motion detector, grey.
Depth: 26,2 mm



19485.B
Passive infrared motion detector, white.
Depth: 26,2 mm



14485
Passive infrared motion detector, white.
Depth: 25,5 mm



14485.SL
Passive infrared motion detector, Silver.
Depth: 25,5 mm



20485.N
Passive infrared motion detector, Next.
Depth: 26,5 mm



19485.M
Passive infrared motion detector Metal.
Depth: 26,2 mm



20486
Oriental passive infrared motion detector, grey.
Depth: 26,5 mm



20486.B
Oriental passive infrared motion detector, white.
Depth: 26,5 mm




19486
Oriental passive infrared motion detector, grey.
Depth: 26,5 mm



19486.B
Oriental passive infrared motion detector, white.
Depth: 26,5 mm



20486.N
Oriental passive infrared motion detector, Next.
Depth: 26,5 mm



19486.M
Oriental passive infrared motion detector, Metal.
Depth: 26,5 mm



01828
Mini passive infrared motion detector, for surface mounting, white



In/out interfaces



20518
Interface for 2 traditional devices, grey.
Depth: 40 mm



20518.B
Interface for 2 traditional devices, white.
Depth: 40 mm



20518.N
Interface for 2 traditional devices, Next.
Depth: 40 mm



19518
Interface for 2 traditional devices, grey.
P.tá: 39,5 mm



19518.B
Interface for 2 traditional devices, white.
P.tá: 39,5 mm



19518.M
Interface for 2 traditional devices, Metal.
P.tá: 39,5 mm



14518
Interface for 2 traditional devices, white.
Depth: 39 mm



14518.SL
Interface for 2 traditional devices, Silver.
Depth: 39 mm

By-me Plus: smart automation

EIKON

ARKÉ

PLANA

Control and functions

In/out interfaces



20584.1
For By-me commands transmission to IR receiver, with 3 m of cable, grey.
Depth: 40 mm

20584.1.B
For By-me commands transmission to IR receiver, with 3 m of cable, white.
Depth: 40 mm



19584.1
For By-me commands transmission to IR receiver, with 3 m of cable, grey.
Depth: 39 mm

19584.1.B
For By-me commands transmission to IR receiver, with 3 m of cable, white.
Depth: 39 mm



14584.1
For By-me commands transmission to IR receiver, with 3 m of cable, grey.
Depth: 39 mm

14584.1.SL
For By-me commands transmission to IR receiver, with 3 m of cable, Silver.
Depth: 39 mm



20584.1.N
For By-me commands transmission to IR receiver, with 3 m of cable, Next.
Depth: 40 mm



19584.1.M
For By-me commands transmission to IR receiver, with 3 m of cable, Metal.
Depth: 39 mm

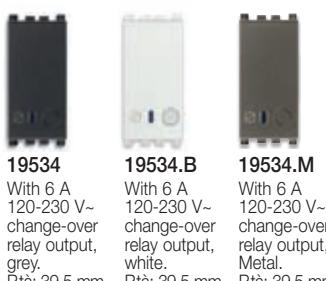
Actuators



20534
With 6 A
120-230 V~
change-over
relay output,
grey.
Depth: 40 mm

20534.B
With 6 A
120-230 V~
change-over
relay output,
white.
Depth: 40 mm

20534.N
With 6 A
120-230 V~
change-over
relay output,
Next.
Depth: 40 mm



19534
With 6 A
120-230 V~
change-over
relay output,
grey.
P.tà: 39,5 mm

19534.B
With 6 A
120-230 V~
change-over
relay output,
white.
P.tà: 39,5 mm

19534.M
With 6 A
120-230 V~
change-over
relay output,
Metal.
P.tà: 39,5 mm



14534
With 6 A
120-230 V~
change-over
relay output,
white.
Depth: 39 mm

14534.SL
With 6 A
120-230 V~
change-over
relay output,
Silver.
Depth: 39 mm

Modules for device backfit



01475

3 programmable digital inputs module for contacts without potential, 3 LED control outputs, By-me home automation, for flush mounting (backside)



01476

2 programmable digital inputs module for contacts without potential, 1 NO 10 A 120-230 V~ 50/60 Hz light control relay for cosφ 0,6 2 A 120-230 V~ motor, 2 LED control outputs, By-me home automation, for flush mounting (backside)



01477

2 programmable digital inputs module for contacts without potential, 1 NO 10 A 120-230 V~ 50/60 Hz light control relay for cosφ 0,6 2 A 120-230 V~ motor, 2 LED control outputs, By-me home automation, for flush mounting (backside)

By-me Plus: smart automation

Control and functions

Interfaces, actuators and dimmer



01417
Actuator + RGB (W) dimmer, 4 PWM outputs up to 5 A 12-48 Vdc with steady voltage control, brightness adjustment of max 4 mono-chrome LED or RGB (W) LED strips/spotlights or Dynamic White LED strips/spotlights, 1 NO 6 A 120-240 V~ relay output for LED power units, local control push button, 4 x 17,5 mm modules



01418
Dimmer, 120-240 V~ 50/60 Hz, cutting-edge phase, 2 outputs for 40-300 W at 240 V~, 20-150 W at 120 V~ incandescent lamps, 40-300 VA at 240 V~, 20-150 VA at 120 V~ electronic transformers, CFL 10-200 W at 240 V~, 5-100 W at 120 V~ CFL lamps, 3-200 W at 240 V~, 3-100 W at 120 V~ LED lamps, local control push button, fuse protection, 4 x 17,5 mm modules



01466.1
Actuator with 4 (0)4-20 mA or 0-10 V proportional analogue outputs with max scalable voltage output, 120-230 V~ 50/60 Hz, 4 x 17,5 mm modules. Combined with By-me temperature sensors and thermostats, it allows you to make a modulating room thermostat in class V (3% contribution). Combined with relay actuator, it allows the management of lamps controlled by driver 0/1-10 V



01467
Device with 3 analogue signal inputs, 1 0-10 V or 4-20 mA input, 1 NTC sensor input, 1 brightness sensor 01530 input, 2 x 17,5 mm modules



01850.2
Actuator with 16 A 120-230 V~ changeover relay output + push button for manual operating, 2 x 17,5 mm modules



01470.1
Pre-program 9-input and 8-output module, NO 16 A 120-230 V~ 50/60 Hz relay outputs, light control, roller blind laths positioning and local control functions, 6 x 17,5 mm modules



01471
4 16 A 120-230 V~ change-over relay outputs actuator, programmable for light control, roller blind laths positioning, fan-coil and local control, 4 x 17,5 mm modules



01975
Actuator with 1-10 Vdc 30 mA output for LED control, 120-230 V~ 2,5 A change-over relay output, 120-230 V~ 50/60 Hz, 3 x 17,5 mm modules



01976
Actuator with 1-10 Vdc 30 mA output for LED control, 12-24 V 10 A relay output, 12-24 V~ 50/60 Hz or 12-24 Vdc, 3 x 17,5 mm modules

Electronic supply units



01874
230 V~ 50 Hz for LED strip modules 12/24 Vdc, dimmable with MASTER dimmers (not for 230 V~ LED lamps and 0-10 V and 1-10 V ballast)

Δ 01874.120
As above, 120 V~



01875
230 V~ 50 Hz for LED strip modules 350/500/700 mA, dimmable with MASTER dimmers (not for 230 V~ LED lamps and 0-10 V and 1-10 V ballast)

Δ 01875.120
As above, 120 V~



01876
230 V~ 50 Hz for RGB LED modules 12/24 Vdc, dimmable with RGB and FADING-SHOW dimmers

Δ 01876.120
As above, 120 V~



Δ 01877
By-me multivoltage driver 230 V~ 50 Hz for RGB LED modules 12/24 Vdc

Δ 01877.120
As above, 120 V~

By-me Plus: smart automation

EIKON

ARKÉ

PLANA

System extension with EnOcean® wireless technology (868 MHz)



03955

4-button flat device with RF transmission, 868 MHz, EnOcean® standard, energy harvesting supply powered by built-in electrodynamic generator, to complete with buttons - 2 modules. Depth: 3,5 mm



01796.2

Multi-function actuator with relay output NO 10 A 230 V~ programmable with switch function for local control, transferable local input as ON/OFF control for other EnOcean® actuators, 230 V~ 50/60 Hz power supply



▲ 21507.1

Frame for Eikon Evo 2-module cover plates, grey



▲ 21507.1.B

Frame for Eikon Evo 2-module cover plates, white



19507

Frame for Arké 2-central-module or 2-module cover plates, grey



19507.B

Frame for Arké 2-central-module or 2-module cover plates, white



20507

Frame for Plana 2-central-module or 2-module cover plates, grey



20507.B

Frame for Plana 2-central-module or 2-module cover plates, white



22507

Frame for Eikon Exé 2-module cover plates, grey



22507.B

Frame for Eikon Exé 2-module cover plates, white



19507.CL

Frame for Arké Classic 2-module cover plates, grey




19507.CL.B

Frame for Arké Classic 2-module cover plates, white



14507

Frame for Plana 2-module cover plates, white



20507

Frame for Eikon 2-central-module or 2-module cover plates, grey



20507.B

Frame for Eikon 2-central-module or 2-module cover plates, white



19507.RN

Frame for Arké Round 2-module cover plates, grey



19507.RN.B

Frame for Arké Round 2-module cover plates, white



20506

Pair of 1-module buttons for RF devices, customisable¹, grey



20506.B

Pair of 1-module buttons for RF devices, customisable¹, white



20506.N

Pair of 1-module buttons for RF devices, customisable¹, Next



19506

Pair of 1-module buttons for RF devices, customisable¹, grey



19506.B

Pair of 1-module buttons for RF devices, customisable¹, white



19506.M

Pair of 1-module buttons for RF devices, customisable¹, Metal



14506

Pair of 1-module buttons for RF devices, customisable¹, white



14506.SL

Pair of 1-module buttons for RF devices, customisable¹, Silver



20506.2

2-module button for RF devices, customisable¹, grey



20506.2.B

2-module button for RF devices, customisable¹, white



20506.2.N

2-module button for RF devices, customisable¹, Next



19506.2

2-module button for RF devices, customisable¹, grey



19506.2.B

2-module button for RF devices, customisable¹, white



19506.2.M

2-module button for RF devices, customisable¹, Metal



14506.2

2-module button for RF devices, customisable¹, white



14506.2.SL

2-module button for RF devices, customisable¹, Silver



20508

EnOcean® Bus interface, grey - 2 modules. Depth: 26,5 mm



20508.B

EnOcean® Bus interface, white - 2 modules. Depth: 26,5 mm



20508.N

EnOcean® Bus interface, Next - 2 modules. Depth: 26,5 mm



19508

EnOcean® Bus interface, grey - 2 modules. Depth: 26,2 mm



19508.B

EnOcean® Bus interface, white - 2 modules. Depth: 26,2 mm



19508.M

EnOcean® Bus interface, Metal - 2 modules. Depth: 26,2 mm



14508

EnOcean® Bus interface, white - 2 modules. Depth: 25,5 mm



14508.SL

EnOcean® Bus interface, Silver - 2 modules. Depth: 25,5 mm

¹ For the customisation of the buttons, see page 284

EIKON

ARKÉ

PLANA

Sound system



20582
Audio input with 2 RCA connectors, automatic volume adjustment, incorporated line terminator, grey - 2 modules Depth: 37 mm




20582.B
Audio input with 2 RCA connectors, automatic volume adjustment, incorporated line terminator, white - 2 modules Depth: 37 mm




20582.N
Audio input with 2 RCA connectors, automatic volume adjustment, incorporated line terminator, Next - 2 modules Depth: 37 mm



19582
Audio input with 2 RCA connectors, automatic volume adjustment, incorporated line terminator, grey - 2 modules Depth: 36,7 mm



19582.B
Audio input with 2 RCA connectors, automatic volume adjustment, incorporated line terminator, white - 2 modules Depth: 36,7 mm



19582.M
Audio input with 2 RCA connectors, automatic volume adjustment, incorporated line terminator, Metal - 2 modules Depth: 36,7 mm



14582
Audio input with 2 RCA connectors, automatic volume adjustment, incorporated line terminator, white - 2 modules Depth: 36 mm



14582.SL
Audio input with 2 RCA connectors, automatic volume adjustment, incorporated line terminator, Silver - 2 modules Depth: 36 mm



20583
Spring connector for speaker, grey. Depth: 19,4 mm



20583.B
Spring connector for speaker, white. Depth: 19,4 mm



20583.N
Spring connector for speaker, Next. Depth: 19,4 mm



19583
Spring connector for speaker, grey. Depth: 18,9 mm



19583.B
Spring connector for speaker, white. Depth: 18,9 mm



19583.M
Spring connector for speaker, Metal. Depth: 18,9 mm



14583
Spring connector for speaker, white. Depth: 18,4 mm



14583.SL
Spring connector for speaker, Silver. Depth: 18,4 mm



20589²
Bluetooth® interface, storing up to 8 mobile devices, grey - 2 modules Depth: 36 mm



20589.B²
Bluetooth® interface, storing up to 8 mobile devices, white - 2 modules Depth: 36 mm



20589.N²
Bluetooth® interface, storing up to 8 mobile devices, Next - 2 modules Depth: 36 mm



19589²
Bluetooth® interface, storing up to 8 mobile devices, grey - 2 modules Depth: 36,7 mm



19589.B²
Bluetooth® interface, storing up to 8 mobile devices, white - 2 modules Depth: 36,7 mm



19589.M²
Bluetooth® interface, storing up to 8 mobile devices, Metal - 2 modules Depth: 36,7 mm



14589²
Bluetooth® interface, storing up to 8 mobile devices, white - 2 modules Depth: 37 mm



14589.SL²
Bluetooth® interface, storing up to 8 mobile devices, Silver - 2 modules Depth: 37 mm



20590²
4+4 W RMS stereo amplifier, 2 outputs for 8 Ω sound diffusers with built-in Bluetooth® wireless technology receiver, 1 LINE IN, supply voltage 12 Vdc, grey - 2 modules. Depth: 36 mm



20590.B²
4+4 W RMS stereo amplifier, 2 outputs for 8 Ω sound diffusers with built-in Bluetooth® wireless technology receiver, 1 LINE IN, supply voltage 12 Vdc, Next - 2 modules. Depth: 36 mm



20590.N²
4+4 W RMS stereo amplifier, 2 outputs for 8 Ω sound diffusers with built-in Bluetooth® wireless technology receiver, 1 LINE IN, supply voltage 12 Vdc, white - 2 modules. Depth: 36 mm



19590²
4+4 W RMS stereo amplifier, 2 outputs for 8 Ω sound diffusers with built-in Bluetooth® wireless technology receiver, 1 LINE IN, supply voltage 12 Vdc, grey - 2 modules. Depth: 36,7 mm



19590.B²
4+4 W RMS stereo amplifier, 2 outputs for 8 Ω sound diffusers with built-in Bluetooth® wireless technology receiver, 1 LINE IN, supply voltage 12 Vdc, white - 2 modules. Depth: 36,7 mm



19590.M²
4+4 W RMS stereo amplifier, 2 outputs for 8 Ω sound diffusers with built-in Bluetooth® wireless technology receiver, 1 LINE IN, supply voltage 12 Vdc, white - 2 modules. Depth: 36,7 mm



14590²
4+4 W RMS stereo amplifier, 2 outputs for 8 Ω sound diffusers with built-in Bluetooth® wireless technology receiver, 1 LINE IN, supply voltage 12 Vdc, Metal - 2 modules. Depth: 36 mm



14590.SL²
4+4 W RMS stereo amplifier, 2 outputs for 8 Ω sound diffusers with built-in Bluetooth® wireless technology receiver, 1 LINE IN, supply voltage 12 Vdc, white - 2 modules. Depth: 36 mm

EIKON

ARKÉ


PLANA

Sound system

Microphones and tuners



20586
Microphone for selective or general call, voice activation function for monitoring children, grey - 2 modules.
Depth: 37 mm



20586.B
Microphone for selective or general call, voice activation function for monitoring children, white - 2 modules.
Depth: 37 mm



20586.N
Microphone for selective or general call, voice activation function for monitoring children, Next - 2 modules.
Depth: 37 mm



19586
Microphone for selective or general call, voice activation function for monitoring children, grey - 2 modules.
Depth: 37 mm



19586.B
Microphone for selective or general call, voice activation function for monitoring children, white - 2 modules.
Depth: 37 mm



19586.M
Microphone for selective or general call, voice activation function for monitoring children, Metal - 2 modules.
Depth: 37 mm



14586
Microphone for selective or general call, voice activation function for monitoring children, white - 2 modules.
Depth: 36 mm



14586.SL
Microphone for selective or general call, voice activation function for monitoring children, Silver - 2 modules.
Depth: 36 mm



01900
FM radio tuner with RDS, coaxial connector for external FM antenna, built-in line terminator, 2 x 17,5 mm modules

Amplifiers



01483
4-button, 1 LINE OUT output, RGB LED location in darkness with brightness control, to be completed with interchangeable 1- or 2-module half-buttons - 2 modules.
Depth: 37 mm



01484
4-button with 1 + 1 W RMS stereo amplifier, 2 x 8 Ω speaker outputs, RGB LED location in darkness with brightness control, to be completed with interchangeable 1- or 2-module half-buttons - 2 modules.
Depth: 37 mm



01901
Stereo amplifier, 2 outputs for sound diffusers 8 Ω 10+10 W, power supply 110-230 V~ 50/60 Hz, built-in line terminator, 6 x 17,5 mm modules

2 interchangeable half-buttons - 1 module



20751.4
I/O volume symbol, grey



20751.4.B
I/O volume symbol, white



20751.4.N
I/O volume symbol, Next



19751.4
I/O volume symbol, grey



19751.4.B
I/O volume symbol, white



19751.4.M
I/O volume symbol, Metal



14751.4
I/O volume symbol, white



14751.4.SL
I/O volume symbol, Silver



20751.5
Function/track change symbol, grey



20751.5.B
Function/track change symbol, white



20751.5.N
Function/track change symbol, Next



19751.5
Function/track change symbol, grey



19751.5.B
Function/track change symbol, white



19751.5.M
Function/track change symbol, Metal



14751.5
Function/track change symbol, white



14751.5.SL
Function/track change symbol, Silver

By-me Plus: smart automation

Sound system

Diffusers



21588
Passive speaker, 8 Ω
10 W, grey - 8 modules.
Depth: 48 mm



20587
Passive speaker, 8 Ω 3 W,
grey - 3 modules.
Depth: 40 mm



21588.B
Passive speaker, 8 Ω
10 W, white - 8 modules.
Depth: 48 mm



20587.B
Passive speaker, 8 Ω 3 W,
white - 3 modules.
Depth: 40 mm



21588.N
Passive speaker, 8 Ω
10 W, Next - 8 modules.
Depth: 48 mm



20587.N
Passive speaker, 8 Ω 3 W,
Next - 3 modules.
Depth: 40 mm



01906
IP55 passive speaker, 8 Ω 30 W,
for hollow walls and false ceiling
installation. Depth: 70 mm



01907.1
Passive speaker, 8 Ω 30 W,
for hollow walls and false
ceiling installation. Depth: 68 mm



01908
Passive speaker, 8 Ω 30 W, orientable,
for surface mounting

System components



01903
Branch shunt for By-me
devices, flush mounting
(retrofit)



01904
Branch shunt for
sound system devices,
flush mounting (retrofit)



01902
Bus line/sound system
decoupler for By-me
power supply, built-in
line terminator,
2 x 17,5 mm modules



01831
Supply unit 12 Vdc
1250 mA output,
100-240 V~ 50/60 Hz,
1,5 x 17,5 mm
modules



01831.1
Supply unit 12 Vdc
1250 mA output,
100-240 V~ 50/60 Hz,
1 x 17,5 mm
modules



01840.E.B
By-me system Bus cable for sound
system, 2x0,50 mm², with LSZH
sheath, CPR Eca class, suitable
for I category cables (U₀ = 400 V),
blue - 100 m



01839
Removable
2 screw
terminals, for
Bus system

EIKON

ARKÉ

PLANA

Temperature control

Thermostats



02951

Touch screen thermostat for ON/OFF, PWM and PID temperature control, for 2- and 4-pipe systems, 3-speed/proportional fan coil control, 1 input for NTC sensor, black - 2 modules. Depth: 38,5 mm



02951.B

Touch screen thermostat for ON/OFF, PWM and PID temperature control, for 2- and 4-pipe systems, 3-speed/proportional fan coil control, 1 input for NTC sensor, white - 2 modules. Depth: 38,5 mm



02951.BN

Touch screen thermostat for ON/OFF, PWM and PID temperature control, for 2- and 4-pipe systems, 3-speed/proportional fan coil control, 1 input for NTC sensor, neutral - 2 modules. Depth: 38,5 mm

Probes and sensors



20538

Temperature probe for ON/OFF, PWM, PID and dew point control, for 2- and 4-pipe systems, 3-speed/proportional fan coil control, 1 input for NTC sensor, grey. Depth: 40 mm



20538.B

Temperature probe for ON/OFF, PWM, PID and dew point control, for 2- and 4-pipe systems, 3-speed/proportional fan coil control, 1 input for NTC sensor, white. Depth: 40 mm



20538.N

Temperature probe for ON/OFF, PWM, PID and dew point control, for 2- and 4-pipe systems, 3-speed/proportional fan coil control, 1 input for NTC sensor, Next. Depth: 40 mm



19538

Temperature probe for ON/OFF, PWM, PID and dew point control, for 2- and 4-pipe systems, 3-speed/proportional fan coil control, 1 input for NTC sensor, grey. Depth: 40 mm



19538.B

Temperature probe for ON/OFF, PWM, PID and dew point control, for 2- and 4-pipe systems, 3-speed/proportional fan coil control, 1 input for NTC sensor, white. Depth: 40 mm



19538.M

Temperature probe for ON/OFF, PWM, PID and dew point control, for 2- and 4-pipe systems, 3-speed/proportional fan coil control, 1 input for NTC sensor, Metal. Depth: 40 mm



14538

Temperature probe for ON/OFF, PWM, PID and dew point control, for 2- and 4-pipe systems, 3-speed/proportional fan coil control, 1 input for NTC sensor, white. Depth: 39 mm



14538.SL

Temperature probe for ON/OFF, PWM, PID and dew point control, for 2- and 4-pipe systems, 3-speed/proportional fan coil control, 1 input for NTC sensor, Silver. Depth: 39 mm



20432

Electronic temperature sensor, 1 output, grey. Depth: 24,4 mm



20432.B

Electronic temperature sensor, 1 output, white. Depth: 24,4 mm



20432.N

Electronic temperature sensor, 1 output, Next. Depth: 24,4 mm



19432

Electronic temperature sensor, 1 output, grey. Depth: 24,4 mm



19432.B

Electronic temperature sensor, 1 output, white. Depth: 24,4 mm



19432.M

Electronic temperature sensor, 1 output, Metal. Depth: 24,4 mm



14432

Electronic temperature sensor, 1 output, white. Depth: 23,4 mm



14432.SL

Electronic temperature sensor, 1 output, Silver. Depth: 23,4 mm



20433

Humidity sensor, 1 0-10 V or 4-20 mA output, 12/24V, grey - 2 modules. Depth: 37 mm



20433.B

Humidity sensor, 1 0-10 V or 4-20 mA output, 12/24V, white - 2 modules. Depth: 37 mm



20433.N

Humidity sensor, 1 0-10 V or 4-20 mA output, 12/24V, Next - 2 modules. Depth: 37 mm



19433

Humidity sensor, 1 0-10 V or 4-20 mA output, 12/24V, grey - 2 modules. Depth: 37 mm



19433.B

Humidity sensor, 1 0-10 V or 4-20 mA output, 12/24V, white - 2 modules. Depth: 37 mm



19433.M

Humidity sensor, 1 0-10 V or 4-20 mA output, 12/24V, Metal - 2 modules. Depth: 37 mm



14433

Humidity sensor, 1 0-10 V or 4-20 mA output, 12/24V, white - 2 modules. Depth: 36 mm



14433.SL

Humidity sensor, 1 0-10 V or 4-20 mA output, 12/24V, Silver - 2 modules. Depth: 36 mm



02965.1

Wired temperature sensor, NTC 10 kΩ, cable length 3 m



01465

Climate control device for heating systems, power supply 120-230 V~ 50/60 Hz, 3 inputs for PT100, PT1000 and NTC probes, 1 mixer valve control output, 1 0-10 V or (0) 4-20 mA output, 1 16 A 230 V~ change-over relay output, 6 x 17,5 mm modules

Energy management

Actuators



20537
Actuator with relay output 16 A 120-230 V~ 50/60 Hz with incorporated current sensor, grey - 2 modules. Depth: 37 mm



20537.B
Actuator with relay output 16 A 120-230 V~ 50/60 Hz with incorporated current sensor, white - 2 modules. Depth: 37 mm



20537.N
Actuator with relay output 16 A 120-230 V~ 50/60 Hz with incorporated current sensor, Next - 2 modules. Depth: 37 mm



19537
Actuator with relay output 16 A 120-230 V~ 50/60 Hz with incorporated current sensor, grey - 2 modules. Depth: 36,7 mm



19537.B
Actuator with relay output 16 A 120-230 V~ 50/60 Hz with incorporated current sensor, white - 2 modules. Depth: 36,7 mm



19537.M
Actuator with relay output 16 A 120-230 V~ 50/60 Hz with incorporated current sensor, white - 2 modules. Depth: 36,7 mm



14537
Actuator with relay output 16 A 120-230 V~ 50/60 Hz with incorporated current sensor, Metal - 2 modules. Depth: 36 mm



14537.SL
Actuator with relay output 16 A 120-230 V~ 50/60 Hz with incorporated current sensor, Silver - 2 modules. Depth: 36 mm

Meters



01451
Energy meter with incorporated current sensor, measurable powers up to 3680 W, flush mounting (retrofit)



01452
Pulse counter interface for measuring data from devices fitted with pulse outputs, such as electricity, water and gas meters, flush mounting (retrofit)



01450
Energy meter, 3 x inputs toroidal sensor, 25 W-100 kW, 120-230 V 50/60 Hz, 230/400 V 50/60 Hz, 1 x 17,5 mm modules. Supplied with toroidal current sensor 01457



01455
Load control module, 3 x inputs toroidal sensor, 25 W-100 kW, 120-230 V 50/60 Hz, 230/400 V 50/60 Hz, 1 x 17,5 mm modules. Supplied with toroidal current sensor 01457



01456
Actuator, 16 A 120-230 V~ 50/60 Hz relay output for toroidal differential current sensor, 1 x 17,5 mm modules. Supplied without toroidal differential current sensor



01457
Toroidal current sensor for load control and power measurement, hole diameter 7,5 mm, cable length 40 cm



01458
Toroidal current sensor for load control and power measurement, hole diameter 19 mm, cable length 40 cm



01459
Toroidal differential current sensor for power measurement, hole diameter 9 mm, cable length 40 cm



01546
Weather station, KNX standard, power supply 12-32 Vdc or 12-24 Vac

EIKON

ARKÉ

PLANA

Accessories - Supports



00802.14
Orientable support,
grey - 2 modules



00802
Orientable support,
white - 2 modules



00802.14
Orientable support,
grey - 2 modules



00802
Orientable support,
white - 2 modules



00802
Orientable support,
white - 2 modules



00802.20
Orientable support,
Silver - 2 modules



00802.20
Orientable support,
Silver - 2 modules



00805.14
Adaptor for orientable
supports flush
mounting, grey
- 2 modules.
Depth: 36,5 mm



00805
Adaptor for orientable
supports flush
mounting, white
- 2 modules.
Depth: 36,5 mm



00805.14
Adaptor for orientable
supports flush
mounting, grey
- 2 modules.
Depth: 36,5 mm



00805
Adaptor for orientable
supports flush
mounting, white
- 2 modules.
Depth: 36,5 mm



00805
Adaptor for orientable
supports flush
mounting, white
- 2 modules.
Depth: 36,5 mm



00805.20
Adaptor for orientable
supports flush
mounting, Silver
- 2 modules.
Depth: 36,5 mm



00805.20
Adaptor for orientable supports
flush mounting, Silver
- 2 modules. Depth: 36,5 mm



00800.14
Frame for supports
surface mounting,
grey



00800
Frame for supports
surface mounting,
white



00800.14
Frame for supports
surface mounting,
grey



00800
Frame for supports
surface mounting,
white



00800
Cornice per fissaggio
a parete, bianco



00800.20
Frame for supports surface
mounting, Silver



00800.20
Frame for supports surface
mounting, Silver

Supervision



01425***
10" IP colour touch screen, used as a home automation system supervisor, IP/Due Fili Plus internal video entryphone, IP video camera and CCTV system manager, power supply PoE or 12-30 Vdc, surface mounting with bracket on round, 3-module (horizontal or vertical), 8-module (4+4) or Britisch standard square mounting box, black



21665.11
Aluminium
Dimensions: 345x250 mm



21665.70
White diamond
Dimensions: 345x250 mm



21665.76
Black diamond
Dimensions: 345x250 mm



01422***
Touch screen with 7" IP capacitive colour display, used as a home automation system supervisor, IP/Due Fili Plus internal video entryphone, IP video camera and CCTV system manager, power supply PoE or 12-30 Vdc, surface mounting with bracket on round, 3-module (horizontal or vertical), 8-module (4+4) or Britisch standard square mounting box, black



01422.B***
Touch screen with 7" IP capacitive colour display, used as a home automation system supervisor, IP/Due Fili Plus internal video entryphone, IP video camera and CCTV system manager, power supply PoE or 12-30 Vdc, surface mounting with bracket on round, 3-module (horizontal or vertical), 8-module (4+4) or Britisch standard square mounting box, white



01420***
Touch screen with 4,3" IP capacitive colour display, used as a home automation system supervisor, IP/Due Fili Plus internal video entryphone, IP video camera and CCTV system manager, power supply PoE or 12-30 Vdc, with built-in 8 (4+4)-module mounting frame, to be completed with Eikon, Arké or Plana cover plate, black



01420.B***
Touch screen with 4,3" IP capacitive colour display, used as a home automation system supervisor, IP/Due Fili Plus internal video entryphone, IP video camera and CCTV system manager, power supply PoE or 12-30 Vdc, with built-in 8 (4+4)-module mounting frame, to be completed with Eikon, Arké or Plana cover plate, white



01420.BN***
Touch screen with 4,3" IP capacitive colour display, used as a home automation system supervisor, IP/Due Fili Plus internal video entryphone, IP video camera and CCTV system manager, power supply PoE or 12-30 Vdc, with built-in 8 (4+4)-module mounting frame, to be completed with Eikon, Arké or Plana cover plate, neutral



21848.1
Color touch screen, 4,3", Full Flat, for the control, 1 temperature sensor input, with built-in mounting frame for installation in 8-module mounting box, grey. Depth: 40 mm



21848.1.B
Color touch screen, 4,3", Full Flat, for the control, 1 temperature sensor input, with built-in mounting frame for installation in 8-module mounting box, white. Depth: 40 mm



21848.1.BN
Color touch screen, 4,3", Full Flat, for the control, 1 temperature sensor input, with built-in mounting frame for installation in 8-module mounting box, neutral. Depth: 40 mm

*** Using the **Webview** function, it is possible to supervise a KNX system equipped with a Webserver from the Vimar touch screens.

Supervising



Software for Well-contact Plus system management

01589: Well-contact Suite Light

01590: Well-contact Suite Basic

01591: Well-contact Suite Top

01592: Well-contact Suite Client

01593: Well-contact Suite Office

01594: Well-contact Suite Client Office

01595

Additional software for interfacing with existing management system



01993

Hardware interface for Well-contact Plus touch screens. It is necessary touch screen configuration software



01597

USB spare key for Well-contact Suite software

Dimmers



01528

Dimmer, 2 inputs for 01530, 2 NO 16 A 250 V~ relay outputs, 2 1-10 V outputs, KNX standard, 4 x 17,5 mm modules



01538

Dimmer 120-240 V~ 50/60 Hz, phase-cutting, 2 outputs for incandescent lamps 40-300 W 240 V~, 20-150 W 120 V~, electronic transformers 40-200 VA, CFL lamps 10-200 W, LED lamps 10-200 W, push buttons for local control, KNX standard, protection fuse, 4 x 17,5 mm modules

IN/OUT devices



01514

Interface with 2 input or output programmable channels for LEDs, KNX standard, dimensions: 39,1x40x12,3 mm



01515.1

Interface with 4 input or output programmable channels for LEDs, KNX standard, dimensions: 46x46x11,7 mm



01510

4-channel digital input device, programmable for NO, NC and 120-230 V~ contacts, KNX standard, 2 x 17,5 mm modules



▲01522.1

4 IN/OUT, 4 NO 16 A 250 V~ programmable realy output with lighting control and store with slats orientation, push button for local control, 4 programmable digit inputs for contacts without potential, KNX standard, 4 x 17,5 mm modules

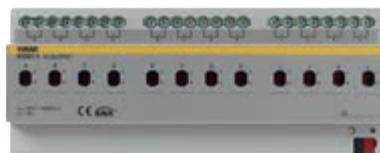


Actuators



▲01523.1

4 NO 16 A 250 V~ relay outputs for lighting control, store with slats orientation, push buttons for local control, KNX standard, 4 x 17,5 mm modules



▲01521.1

Actuator with 12 NO 10 A 250 V~ 50/60 Hz relay outputs for fluorescent lamps, KNX standard, 12 x 17,5 mm modules



01525

Actuator for 8 roller shutters, 6 A 230 V~ 50/60 Hz relay outputs, KNX standard, 8 x 17,5 mm modules



01535

Solenoid valve actuator, 6 230 V~ 0,5 A outputs, local control buttons, KNX standard, 4x17,5 mm modules



01536

Actuator, 4 0-10 V or (0)4-20 mA analog-outputs, KNX standard, 4x17,5 mm modules

Interfaces and gateway



01547.1

IP interface, KNX, 2 x 17,5 mm modules



01542

DALI KNX gateway, 1 channel for 64 lamps into 16 groups, 4 x 17,5 mm modules



01544

KNX DALI gateway, 8-channel for 16 lamps per channel, 6 x 17,5 mm modules



▲01540.1

USB interface, KNX B-type, 2 x 17,5 mm modules



01545

Web server for local and remote control of the KNX system, 8 x 17,5 mm modules



App By-web**

Supervising

Additional devices



01500.2
Power supply with Bus
30 Vdc 320 mA output,
30 Vdc auxiliary output,
supply voltage 120-240 V~
50/60 Hz, with decoupling
coil, KNX standard,
4 x 17,5 mm modules



01501.2
Power supply with Bus
30 Vdc 640 mA output,
30 Vdc auxiliary output,
supply voltage 120-240 V~
50/60 Hz, with decoupling
coil, KNX standard,
4 x 17,5 mm modules



01831.1
Supply unit 12 Vdc
1250 mA output,
100-240 V~
50/60 Hz,
1 x 17,5 mm
module



01504.2
Line coupler,
KNX standard,
2 x 17,5 mm
modules



16887
Safety transformer,
230/12-24 V~ (SELV),
24 VA, 3 x 17,5 mm
modules

KNX cables



01890.E
KNX system cable,
2x2x0,8 mm cable, LSZH
sheath, CPR Eca class,
suitable for I category
cables (U0 = 400 V),
green - 100 m




01890.C
KNX system cable, 2x2x0,8 mm
cable, LSZH sheath, CPR Cca
s1b d1 a1 class, suitable for
I category cables (U0 = 400 V),
green - 100 m

Control and functions

Eikon Tactil controls



21840
4 independently programmable buttons
for single controls or scenes,
KNX standard, for Eikon Tactil
- 2 modules. Depth: 38 mm



21860
6 independently programmable buttons
for single controls or scenes,
KNX standard, for Eikon Tactil
- 3 modules. Depth: 38 mm



21847
8 sheets of stickers with symbols
and words for Eikon Tactil devices



21847.1
4 sheets with labels featuring symbols and
wording for external/internal hotel room or
cabin functions for Eikon Tactil controls




21847.2
4 sheets of stickers with symbols
and words for Eikon Tactil devices

Eikon Exé Flat controls



01580.AX
4-button, KNX standard, visible in darkness
with RGB LED brightness adjustment
- 2 modules. Depth: 21,5 mm



01585.AX
6-button, KNX standard, visible in darkness
with RGB LED brightness adjustment
- 3 modules. Depth: 21,5 mm

EIKON

ARKÉ

PLANA

Control and functions

Interchangeable half buttons Eikon Exé Flat devices - 1-module

22751.01 Without symbol, white	22751.03 Without symbol, grey	22751.11 Without symbol, nickel	22751.12 Without symbol, bronze	22751.82 Without symbol, gold	22751.0.01 Without symbol, customizable ¹ , white	22751.0.03 Without symbol, customizable ¹ , grey	22751.0.11 Without symbol, customizable ¹ , nickel	22751.0.12 Without symbol, customizable ¹ , bronze	22751.0.82 Without symbol, customizable ¹ , gold
22751.1.01 ON/OFF symbols, white	22751.1.03 ON/OFF symbols, grey	22751.1.11 ON/OFF symbols, nickel	22751.1.12 ON/OFF symbols, bronze	22751.1.82 ON/OFF symbols, gold	22751.2.01 Arrows symbols, white	22751.2.03 Arrows symbols, grey	22751.2.11 Arrows symbols, nickel	22751.2.12 Arrows symbols, bronze	22751.2.82 Arrows symbols, gold
22751.3.01 Regulation symbols, white	22751.3.03 Regulation symbols, grey	22751.3.11 Regulation symbols, nickel	22751.3.12 Regulation symbols, bronze	22751.3.82 Regulation symbols, gold					

Eikon, Arké and Plana controls



Interchangeable half buttons - 1-module

20751 Without symbol, customizable ¹ , grey	20751.B Without symbol, customizable ¹ , white	20751.N Without symbol, customizable ¹ , Next	19751 Without symbol, customizable ¹ , grey	19751.B Without symbol, customizable ¹ , white	19751.M Without symbol, customizable ¹ , Metal	14751 Without symbol, customizable ¹ , white	14751.SL Without symbol, customizable ¹ , Silver
20751.0 Fixed, grey	20751.0.B Fixed, white	20751.0.N Fixed, Next	19751.0 Fixed, grey	19751.0.B Fixed, white	19751.0.M Fixed, Metal	14751.0 Fixed, white	14751.0.SL Fixed, Silver

¹ Buttons customization, see page 285

EIKON

ARKÉ

PLANA

Control and functions

Interchangeable half buttons - 1-module

20751.1 ON/OFF symbols, grey	20751.1.B ON/OFF symbols, white	20751.1.N ON/OFF symbols, Next	19751.1 ON/OFF symbols, grey	19751.1.B ON/OFF symbols, white	19751.1.M ON/OFF symbols, Metal	14751.1 ON/OFF symbols, white	14751.1.SL ON/OFF symbols, Silver
20751.2 Arrows symbols, grey	20751.2.B Arrows symbols, white	20751.2.N Arrows symbols, Next	19751.2 Arrows symbols, grey	19751.2.B Arrows symbols, white	19751.2.M Arrows symbols, Metal	14751.2 Arrows symbols, white	14751.2.SL Arrows symbols, Silver
20751.3 Regulation symbols, grey	20751.3.B Regulation symbols, white	20751.3.N Regulation symbols, Next	19751.3 Regulation symbols, grey	19751.3.B Regulation symbols, white	19751.3.M Regulation symbols, Metal	14751.3 Regulation symbols, white	14751.3.SL Regulation symbols, Silver

Interchangeable half buttons - 2-module

20752 Without symbol, customizable ¹ , grey	20752.B Without symbol, customizable ¹ , white	20752.N Without symbol, customizable ¹ , Next	19752 Without symbol, customizable ¹ , grey	19752.B Without symbol, customizable ¹ , white	19752.M Without symbol, customizable ¹ , Metal	14752 Without symbol, customizable ¹ , white	14752.SL Without symbol, customizable ¹ , Silver
20752.1 ON/OFF symbols, grey	20752.1.B ON/OFF symbols, white	20752.1.N ON/OFF symbols, Next	19752.1 ON/OFF symbols, grey	19752.1.B ON/OFF symbols, white	19752.1.M ON/OFF symbols, Metal	14752.1 ON/OFF symbols, white	14752.1.SL ON/OFF symbols, Silver
20752.2 Arrows symbols, grey	20752.2.B Arrows symbols, white	20752.2.N Arrows symbols, Next	19752.2 Arrows symbols, grey	19752.2.B Arrows symbols, white	19752.2.M Arrows symbols, Metal	14752.2 Arrows symbols, white	14752.2.SL Arrows symbols, Silver
20752.3 Regulation symbols, grey	20752.3.B Regulation symbols, white	20752.3.N Regulation symbols, Next	19752.3 Regulation symbols, grey	19752.3.B Regulation symbols, white	19752.3.M Regulation symbols, Metal	14752.3 Regulation symbols, white	14752.3.SL Regulation symbols, Silver

* Not to be used in European Countries

▲ New article

Δ Available until stocks last

EIKON

ARKÉ

PLANA

Temperature control

Thermostats



02952

Touch screen thermostat for ambient temperature control of 2 independent zones, KNX standard, NO 4 A 24 V~ relay output + 1 temperature sensor (20432 or 02965.1) input + 1 programmable digital input, black - 2 modules. Depth: 38,5 mm



02952.B

Touch screen thermostat for ambient temperature control of 2 independent zones, KNX standard, NO 4 A 24 V~ relay output + 1 temperature sensor (20432 or 02965.1) input + 1 programmable digital input, white - 2 modules. Depth: 38,5 mm



02952.BN

Touch screen thermostat for ambient temperature control of 2 independent zones, KNX standard, NO 4 A 24 V~ relay output + 1 temperature sensor (20432 or 02965.1) input + 1 programmable digital input, neutral - 2 modules. Depth: 38,5 mm

Temperature sensors



20432

Electronic temperature sensor, grey
Depth: 24,4 mm



20432.B

Electronic temperature sensor, white
Depth: 24,4 mm



20432.N

Electronic temperature sensor, Next
Depth: 24,4 mm



19432

Electronic temperature sensor, grey
Depth: 24,4 mm



19432.B

Electronic temperature sensor, white
Depth: 24,4 mm



19432.M

Electronic temperature sensor, Metal
Depth: 24,4 mm



14432

Electronic temperature sensor, white
Depth: 23,4 mm



14432.SL

Electronic temperature sensor, Silver.
Depth: 23,4 mm



02965.1

Wired temperature sensor, NTC 10 kΩ,
cable length 3 m

Detectors



20850

Passive infrared motion detector, KNX standard, grey - 2 modules. Depth: 26,5 mm



20850.B

Passive infrared motion detector, KNX standard, white - 2 modules. Depth: 26,5 mm



20850.N

Passive infrared motion detector, KNX standard, Next - 2 modules. Depth: 26,5 mm



19850

Passive infrared motion detector, KNX standard, grey - 2 modules. Depth: 19,7 mm



19850.B

Passive infrared motion detector, KNX standard, white - 2 modules. Depth: 19,7 mm



19850.M

Passive infrared motion detector, KNX standard, Metal - 2 modules. Depth: 19,7 mm



14850

Passive infrared motion detector, KNX standard, white - 2 modules. Depth: 19 mm



14850.SL

Passive infrared motion detector, KNX standard, Silver - 2 modules. Depth: 19 mm

Temperature control

Accessories



00802.14
Orientable support, grey - 2 modules



00802
Orientable support, white - 2 modules



00802.20
Orientable support, Silver - 2 modules



00802.14
Orientable support, grey - 2 modules



00802
Orientable support, white - 2 modules



00802
Orientable support, white - 2 modules



00802.20
Orientable support, Silver - 2 modules



00805.14
Adaptor for orientable support flush mounting, grey - 2 modules. Depth: 36,5 mm



00805
Adaptor for orientable support flush mounting, white - 2 modules. Depth: 36,5 mm



00805.20
Adaptor for orientable support flush mounting, Silver - 2 modules. Depth: 36,5 mm



00805.14
Adaptor for orientable support flush mounting, grey - 2 modules. Depth: 36,5 mm



00805
Adaptor for orientable support flush mounting, white - 2 modules. Depth: 36,5 mm



00805
Adaptor for orientable support flush mounting, white - 2 modules. Depth: 36,5 mm



00805.20
Adaptor for orientable support flush mounting, Silver - 2 modules. Depth: 36,5 mm



00800.14
Frame for orientable support surface mounting, grey



00800
Frame for orientable support surface mounting, white



00800.20
Frame for orientable support surface mounting, Silver



00800.14
Frame for orientable support surface mounting, grey



00800
Frame for orientable support surface mounting, white



00800
Frame for orientable support surface mounting, white



00800.20
Frame for orientable support surface mounting, Silver

Weather station



01546

Weather station, KNX standard, power supply 12-32 Vdc or 12-24 Vac

Presence and brightness sensors



01527

IR presence detector, 360° motion range, ON/OFF and adjustment of lighting, heating, air conditioning, ventilation, 1-1000 Lux adjustable brightness range, KNX standard, for ceiling installation. Dimensions: 80x80x45 mm



01527.S

Adapter for 01527 detector ceiling installation



01529.1

IR presence detector, 360° motion range, for ON/OFF lighting, 1-1000 Lux adjustable brightness range, KNX standard, for ceiling installation. Dimensions: 91x91x45 mm



01529.1.S

Adapter for 01529.1 detector ceiling installation




01530

Light sensor for dimmer 01528, KNX standard, ceiling installation. Dimensions: 52,3x54,3x19,3 mm



Access control

Eikon Tactil: transponder card readers for outdoor of the room



21457
Eikon Tactil touch transponder card reader,
KNX standard, 2 relay outputs NO 4 A
24 V~, 2 inputs, 12-24 V~ 50/60 Hz and
12-24 Vdc (SELV) - 3 modules.

Supplied without transponder card.
Depth: 36,5 mm



21666.70
Electronic plate for 21457,
white diamond - 3 modules



21666.71
Electronic plate for 21457,
aqua - 3 modules



21666.73
Electronic plate for 21457,
pearl grey - 3 modules



21666.76
Electronic plate for 21457,
black diamond - 3 modules



■ 21666.53
Electronic plate for 21457,
grey quartzite - 3 modules



■ 21666.31
Electronic plate for 21457,
italian walnut - 3 modules



■ 21666.32
Electronic plate for 21457,
white oak - 3 modules



■ 21666.33
Electronic plate for 21457,
wengé - 3 modules




■ 21666.21
Electronic plate for 21457,
cream - 3 modules



■ 21666.22
Electronic plate for 21457,
tobacco - 3 modules



■ 21666.41
Electronic plate for 21457,
glacier ice - 3 modules



21457.1
Eikon Tactil touch transponder card reader,
KNX standard, 2 relay outputs NO 4 A
24 V~, 2 inputs, 12-24 V~ 50/60 Hz
and 12-24 Vdc (SELV) - 3 modules.
Supplied without transponder card.
Depth: 36,5 mm



21666.70.01
Electronic plate for 21457.1,
white diamond - 3 modules



21666.71.01
Electronic plate for 21457.1,
aqua - 3 modules



21666.76.01
Electronic plate for 21457.1,
black diamond - 3 modules



21846
8 sheets with adhesive labels
with numbers for room
numbering to customise
Eikon Tactil cover plates

EIKON

ARKÉ

PLANA

Access control



20457

Transponder card reader for installation outside rooms, KNX standard, 2 NO 4 A 24 V~ relay outputs, 2 inputs, power supply 12-24 V~ 50/60 Hz and 12-24 Vdc (SELV), grey - 3 modules.

Supplied without transponder card.
Depth: 37 mm

20457.TR

As above, tropicalized



20457.B

Transponder card reader for installation outside rooms, KNX standard, 2 NO 4 A 24 V~ relay outputs, 2 inputs, power supply 12-24 V~ 50/60 Hz and 12-24 Vdc (SELV), white - 3 modules.

Supplied without transponder card.
Depth: 37 mm

20457.TR.B

As above, tropicalized



20457.N

Transponder card reader for installation outside rooms, KNX standard, 2 NO 4 A 24 V~ relay outputs, 2 inputs, power supply 12-24 V~ 50/60 Hz and 12-24 Vdc (SELV), Next - 3 modules.

Supplied without transponder card.
Depth: 37 mm

20457.TR.N

As above, tropicalized



19457

Transponder card reader for installation outside rooms, KNX standard, 2 NO 4 A 24 V~ relay outputs, 2 inputs, power supply 12-24 V~ 50/60 Hz and 12-24 Vdc (SELV), grey - 3 modules.

Supplied without transponder card.
Depth: 37 mm

19457.TR

As above, tropicalized




19457.B

Transponder card reader for installation outside rooms, KNX standard, 2 NO 4 A 24 V~ relay outputs, 2 inputs, power supply 12-24 V~ 50/60 Hz and 12-24 Vdc (SELV), white - 3 modules.

Supplied without transponder card.
Depth: 37 mm

19457.TR.B

As above, tropicalized



19457.M

Transponder card reader for installation outside rooms, KNX standard, 2 NO 4 A 24 V~ relay outputs, 2 inputs, power supply 12-24 V~ 50/60 Hz and 12-24 Vdc (SELV), Metal - 3 modules.

Supplied without transponder card.
Depth: 37 mm

19457.TR.M

As above, tropicalized



14457

Transponder card reader for installation outside rooms, KNX standard, 2 NO 4 A 24 V~ relay outputs, 2 inputs, power supply 12-24 V~ 50/60 Hz and 12-24 Vdc (SELV), white - 3 modules.

Supplied without transponder card.
Depth: 36 mm

14457.TR

As above, tropicalized



14457.SL

Transponder card reader for installation outside rooms, KNX standard, 2 NO 4 A 24 V~ relay outputs, 2 inputs, power supply 12-24 V~ 50/60 Hz and 12-24 Vdc (SELV), Silver - 3 modules.

Supplied without transponder card.
Depth: 36 mm

14457.TR.SL

As above, tropicalized



01598

Programmable and customizable
transponder card

EIKON

ARKÉ

PLANA

Access control



20453

Transponder card reader with vertical pocket for installation inside rooms, KNX standard, 2 NO 4 A 24 V~ relay outputs, 2 inputs, power supply 12-24 V~ 50/60 Hz and 12-24 Vdc (SELV), grey - 3 modules. Depth: 37 mm



20453.B

Transponder card reader with vertical pocket for installation inside rooms, KNX standard, 2 NO 4 A 24 V~ relay outputs, 2 inputs, power supply 12-24 V~ 50/60 Hz and 12-24 Vdc (SELV), white - 3 modules. Depth: 37 mm



19453

Transponder card reader with vertical pocket for installation inside rooms, KNX standard, 2 NO 4 A 24 V~ relay outputs, 2 inputs, power supply 12-24 V~ 50/60 Hz and 12-24 Vdc (SELV), grey - 3 modules. Depth: 37 mm



19453.B

Transponder card reader with vertical pocket for installation inside rooms, KNX standard, 2 NO 4 A 24 V~ relay outputs, 2 inputs, power supply 12-24 V~ 50/60 Hz and 12-24 Vdc (SELV), white - 3 modules. Depth: 37 mm



14453

Transponder card reader with vertical pocket for installation inside rooms, KNX standard, 2 NO 4 A 24 V~ relay outputs, 2 inputs, power supply 12-24 V~ 50/60 Hz and 12-24 Vdc (SELV), white - 3 modules. Depth: 36,5 mm



14453.SL

Transponder card reader with vertical pocket for installation inside rooms, KNX standard, 2 NO 4 A 24 V~ relay outputs, 2 inputs, power supply 12-24 V~ 50/60 Hz and 12-24 Vdc (SELV), Silver - 3 modules. Depth: 36,5 mm



20453.N

Transponder card reader with vertical pocket for installation inside rooms, KNX standard, 2 NO 4 A 24 V~ relay outputs, 2 inputs, power supply 12-24 V~ 50/60 Hz and 12-24 Vdc (SELV), Next - 3 modules Depth: 37 mm



19453.M

Transponder card reader with vertical pocket for installation inside rooms, KNX standard, 2 NO 4 A 24 V~ relay outputs, 2 inputs, power supply 12-24 V~ 50/60 Hz and 12-24 Vdc (SELV), Metal - 3 modules Depth: 37 mm



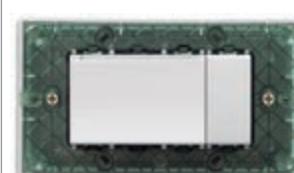
20450

Transponder card reader/programmer, in 4-module table mounting box, grey. To complete with Eikon 4-module cover plate. Dimensions: 148,6x79x9x88,8 mm



19450

Transponder card reader/programmer, in 4-module table mounting box, grey. To complete with Arké 4-module cover plate. Dimensions: 148,6x82,6x9x90,3 mm



14450

Transponder card reader/programmer, in 4-module table mounting box, white. To complete with Plana 4-module cover plate. Dimensions: 142,5x78,4x9x89,2 mm



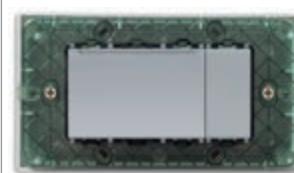
20450.B

Transponder card reader/programmer, in 4-module table mounting box, white. To complete with Eikon 4-module cover plate. Dimensions: 148,6x79x9x88,8 mm



19450.B

Transponder card reader/programmer, in 4-module table mounting box, white. To complete with Arké 4-module cover plate. Dimensions: 148,6x82,6x9x90,3 mm



14450.SL

Transponder card reader/programmer, in 4-module table mounting box, Silver. To complete with Plana 4-module cover plate. Dimensions: 142,5x78,4x9x89,2 mm



20450.N

Transponder card reader/programmer, in 4-module table mounting box, Next. To complete with Eikon 4-module cover plate. Dimensions: 148,6x79x9x88,8 mm

By-alarm: burglar alarm system

By-alarm: burglar alarm system



01700
Control panel, 230 V~ 50 Hz,
8 local inputs expandable to 24,
surface mounting
01700.DE
As above,
in German language
01700.120
As above, 120 V~ 60 Hz



01703
Control panel, 230 V~ 50 Hz,
8 local inputs expandable to 64,
surface mounting
01703.DE
As above,
in German language
01703.120
As above, 120 V~ 60 Hz



01705
LED keypad with display,
12 Vdc, surface mounting
01705.DE
As above,
in German language



01715
Siren for outdoor use
01716
Dummy siren for
outdoor use



01717
Additional power supply unit,
230 V~ 50/60 Hz 1,5 A,
surface mounting
01717.120
As above, 120 V~



01704
8-input expansion
module




01709
4-input expansion
module



01710
4-output expansion
module



01711
Isolated interface
for Bus signal
regeneration



01713.EN
Voice synthesis
module for control
panel, in English



01707
GSM Dual Band
high-gain aerial



01708
PSTN communicator
for control panel



01706
GSM Dual Band GSM/GPRS 900/1800 MHz
transmitter/receiver module



01712.1
IoT gateway for integration in
By-alarm burglar alarm system
with IP/LAN network, Cloud
and App for smartphone, tablet,
PC or touch supervisor



01714
Tear-proof box for expansion
modules, surface mounting



01725
Configuration cables
and interfaces



01736
Extension cable for 01706 GSM
Dual Band communicator aerial,
10 m long

By-alarm: burglar alarm system

EIKON

ARKÉ

PLANA

By-alarm: burglar alarm system



20478
Activator/
partialiser,
grey.
Depth:
41,4 mm



20478.B
Activator/
partialiser,
white.
Depth:
41,4 mm



20478.N
Activator/
partialiser,
Next.
Depth:
41,4 mm



19478
Activator/
partialiser,
grey.
Depth:
40,7 mm



19478.B
Activator/
partialiser,
white.
Depth:
40,7 mm



19478.M
Activator/
partialiser,
Metal.
Depth:
40,7 mm



14478
Activator/
partialiser,
white.
Depth:
40,4 mm



14478.SL
Activator/
partialiser,
Silver.
Depth:
40,4 mm



20479
IR and microwaves
presence detector,
grey - 2 modules.
Depth: 26,5 mm



20479.B
IR and microwaves
presence detector,
white - 2 modules.
Depth: 26,5 mm



19479
IR and microwaves
presence detector,
grey - 2 modules.
Depth: 26,2 mm



19479.B
IR and microwaves
presence detector,
white - 2 modules.
Depth: 26,2 mm



14479
IR and microwaves
presence detector,
white - 2 modules.
Depth: 25,5 mm



14479.SL
IR and microwaves
presence detector,
Silver - 2 modules.
Depth: 25,5 mm



20479.N
IR and microwaves
presence detector,
Next - 2 modules.
Depth: 26,5 mm



19479.M
IR and microwaves
presence detector,
Metal - 2 modules.
Depth: 26,2 mm



20496
Indoor siren, grey
- 3 modules.
Depth: 37 mm



20496.B
Indoor siren, white
- 3 modules.
Depth: 37 mm



19496
Indoor siren, grey
- 3 modules.
Depth: 36,5 mm



19496.B
Indoor siren, white
- 3 modules.
Depth: 36,5 mm



14496
Indoor siren, white
- 3 modules.
Depth: 36 mm



14496.SL
Indoor siren, Silver
- 3 modules.
Depth: 36 mm



20496.N
Indoor siren, Next
- 3 modules.
Depth: 37 mm



19496.M
Indoor siren, Metal
- 3 modules.
Depth: 36,5 mm



01718.G
Transponder key,
green



01718.Y
Transponder key,
yellow

By-alarm: burglar alarm system

By-alarm: burglar alarm system



01720
Passive infrared and micro-wave dual technology detector, PET immune, surface mounting



01721
Passive infrared and microwave dual technology detector, anti-masking and anti-crawl, surface mounting



01723
Dual technology curtain detector, IP54 for outdoor use for entrances and windows, surface mounting



01820
Flush mounting magnetic contact



01722
Dual technology curtain detector, for entrances and windows, surface mounting



01724
Water detector for protection against flooding, floor mounting



01821
Metal flush mounting magnetic contact



01822
Visible surface magnetic contact



01823
Magnetic contact in metal enclosure for visual installation



01825
Electromechanical cordoperated contact for rolling shutters protection



01826
Electromechanical inertial contact for windows and doors protection



01732.E
By-alarm system cable, 2x0,22 mm², with LSZH sheath, CPR Eca class, suitable for I category cables (U0 = 400 V), white - 100 m



01733.E
By-alarm system cable, 2x0,50 mm² + 2x0,22 mm², with LSZH sheath, CPR Eca class, suitable for I category cables (U0 = 400 V), white - 100 m



01734.E
By-alarm system cable, 2x0,50 mm² + 4x0,22 mm², with LSZH sheath, CPR Eca class, suitable for I category cables (U0 = 400 V), white - 100 m



01735.E
By-alarm system cable, 2x0,50 mm² + 6x0,22 mm², with LSZH sheath, CPR Eca class, suitable for I category cables (U0 = 400 V), white - 100 m

By-alarm: burglar alarm system

By-alarm: burglar alarm system

Radiofrequency devices



01726
Tent detector for
doors, windows and
passages protection



01727.1
Detector with magnetic
contact for doors and
windows with shock
sensor, brown



01727.1.B
Detector with magnetic
contact for doors and
windows with shock
sensor, white



01728
Infrared presence
detector



01731
Double technology
tent detector, IP54,
for outdoor, passages
and frames



01729
Two-way 868 MHz
radiofrequency interface



01730
Two-way 868 MHz
radio frequency
remote control

ENCLOSURES AND BOXES

Accessories

LED signalling units



12-24 V~ - 0,1 W

00935.A: amber
00935.G: green
00935.R: red
00935.B: blue
00935.W: white

250 V~ 50/60 Hz - 0,35 W

00936.250.A: amber
00936.250.G: green
00936.250.R: red
00936.250.B: blue
00936.250.W: white



For axial switches

12-24 V~ - 0,1 W

00937.A: amber
00937.G: green
00937.R: red
00937.B: blue
00937.W: white

120 V~ 50/60 Hz - 0,2 W

00936.120.A: amber
00936.120.G: green
00936.120.R: red
00936.120.B: blue
00936.120.W: white

110-250 V~ 50/60 Hz - 0,3 W

00938.A: amber
00938.G: green
00938.R: red
00938.B: blue
00938.W: white

E10 10x21 mm lamps



LED:

▲00940

230 V~ 0,7 W, white

E10 10x28 mm lamps



Incandescent:

14771

24 V~ 3 W, white¹

14777

230 V~ 3 W, white¹

Pre-wired signalling units



00930
250 V~ 0,3 W, red
suitable for British
standard socket outlets



00931
110-250 V~ 0,5 W,
amber



VIMAR

ENCLOSURES AND BOXES



Accessories

Transparent cover for mounting frames



21602.C
For 2-module frame,
71 mm fixing centres



21613.C
For 3-module frame



21614.C
For 4-module frame



21617.C
For 7-module frame



21618.C
For 8 (4+4)-module frame

Adaptors for DIN rail (60715 TH35) installation



V51921
1-module support



V51922
2-module support



V51923
3-module support

ENCLOSURES AND BOXES



Flush mounting boxes


Flush mounting boxes for masonry



V71001
Round ø 60 mm
(GW 650 °C),
light blue



V71001.AU
Round ø 60 mm
(GW 960 °C),
black




V71001, V71001.AU



V71303
(GW 650 °C), light blue
- 3 modules



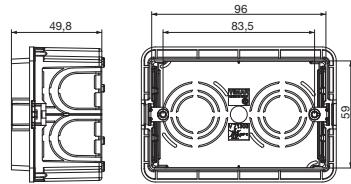V71303.AU
(GW 960 °C), black
- 3 modules




V71303, V71303.AU



V71304
(GW 650 °C), light blue
- 4 modules



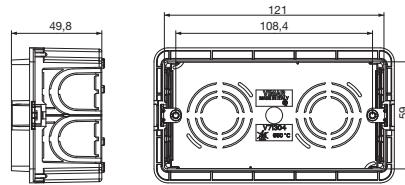V71304.AU
(GW 960 °C), black
- 4 modules




V71304, V71304.AU




V71305
(GW 650 °C), light blue
- 5 modules



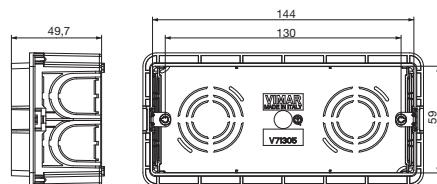Δ V71305.AU
(GW 960 °C), black
- 5 modules



V71305, V71305.AU




Dividing screen to realize
modular and electrically
separated compartments




Knockouts on all sides to
accommodate differently
sized conduits



Precise back to back
positioning, thanks to
marking and stopping pins



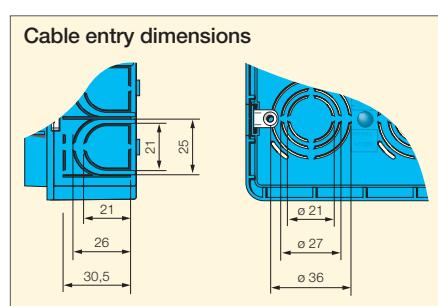Knockouts fixed to the box
in two points only



ENCLOSURES AND BOXES



Flush mounting boxes


Flush mounting boxes for masonry




V71306
(GW 650 °C), light blue
- 6/7 modules




V71306.AU
(GW 960 °C), black
- 6/7 modules




V71306, V71306.AU

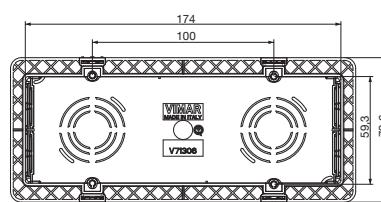


09996
(GW 650 °C), light blue
- 6 (3+3) modules




09996

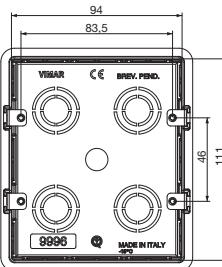


V71318
(GW 650 °C), light blue
- 8 modules




V71318

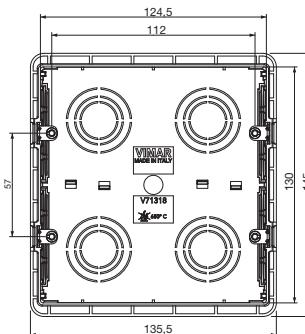

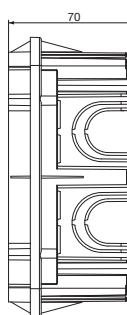V71320
(GW 650 °C), light blue
- 12/14 modules



V71320

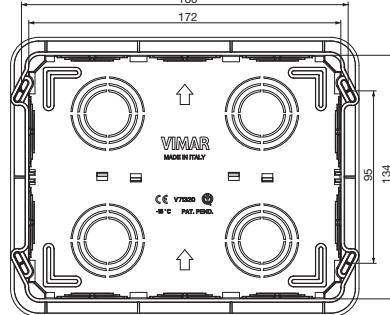

ENCLOSURES AND BOXES

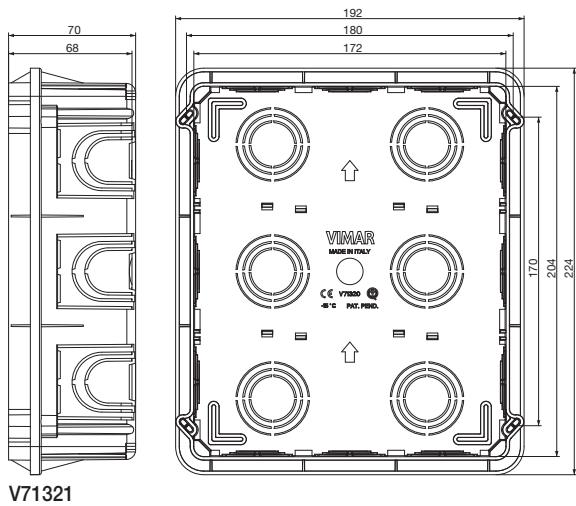


Flush mounting boxes

Flush mounting boxes for masonry



V71321
(GW 650 °C), light blue
- 18/21 modules



V71321

Antimortar protective covers for flush mounting masonry boxes



V71011
Cover for V71001 and
V71001.AU, yellow



V71323
Cover for V71303 and
V71303.AU, yellow



V71324
Cover for V71304 and
V71304.AU, yellow



Δ V71325
Cover for V71305 and
V71305.AU, yellow



V71326
Cover for V71306 and
V71306.AU, yellow



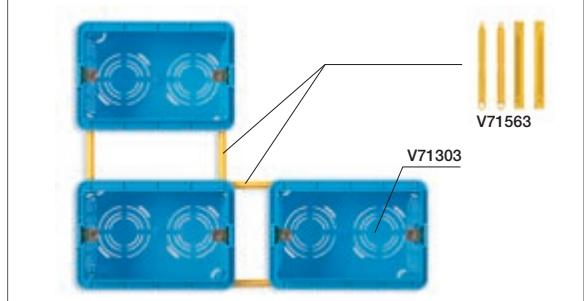
V71328
Cover for V71318 and
V71718, yellow

Accessories for flush mounting masonry boxes



V71563
Coupling joints for both horizontal and
vertical compositions in flush-mounting
boxes V71303, V71304, V71305,
V71306. Length 58,2 mm, yellow

Side-by-side installation with V71563 joint plate



ENCLOSURES AND BOXES



VIMAR


Flush mounting boxes

Flush mounting boxes for hollow walls




V71701

Round ø 60 mm (GW 850 °C),
light blue, suitable only for
mounting frames without claws




V71701




V71703

(GW 850 °C), light blue
- 3 modules




V71703




V71704

(GW 850 °C), light blue
- 4 modules




V71704

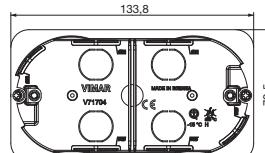


V71706

(GW 850 °C), light blue
- 6/7 modules




V71706


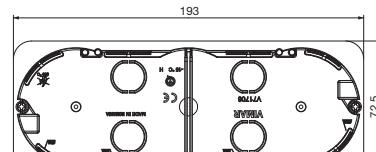


V71718

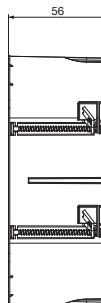(GW 850 °C), light blue
- 8 modules




V71718

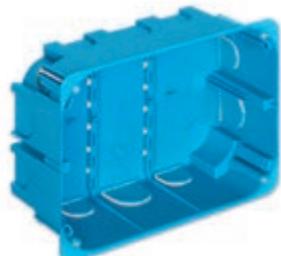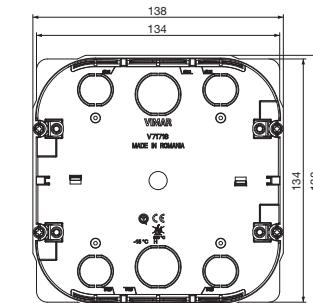


V71720

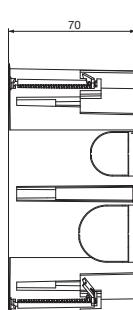Multifunction (GW 850 °C), light blue.
Casing for ordinary use (GP)
- 12/14 modules



V71720

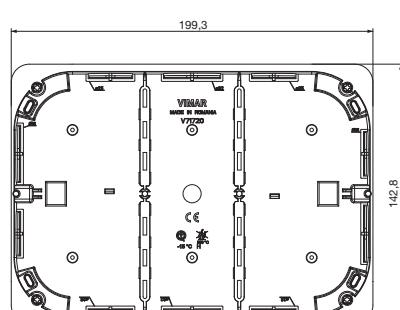

ENCLOSURES AND BOXES



Flush mounting boxes

Multifunction accessories for hollow walls flush mounting boxes

**V71571**

Support for installing boxes V71701 on light walls inside the wall, yellow:

- centring template;
- coupling joint for mounting boxes in horizontal and vertical banks

**V71573**

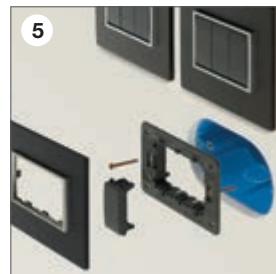
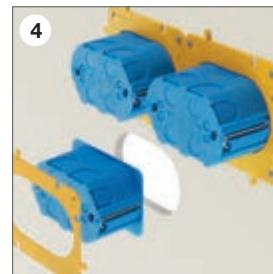
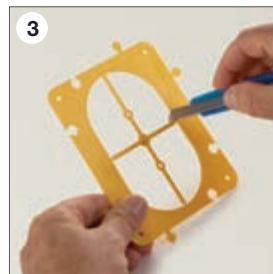
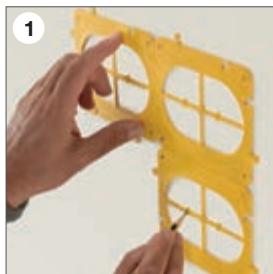
Support for installing boxes V71703 on light walls inside the wall, yellow:

- centring template;
- coupling joint for mounting boxes in horizontal and vertical banks

**V71574**

Support for installing boxes V71704 on light walls inside the wall, yellow:

- centring template;
- coupling joint for mounting boxes in horizontal and vertical banks

1. and 2. Use the **V71573** accessory as a template for a precise drilling.

3. Remove with a cutter or scissors the central grid. The accessory can also be used as a tie.
4. When box positioned, fix it to the hollow wall with screws for plasterboard.
5. The result is a flush profile.

Accessories for flush mounting masonry and hollow wall boxes

**V71550**

Dividing screen for boxes V71303..., V71304..., V71305..., V71306..., V71703, V71704, V71706, yellow

**V71551**

Horizontal dividing screen for boxes V71320, V71321, V71620, V71720, 09920..., 09921..., yellow. Allows to realize electrically separated compartments inside the box

**V71552**

Horizontal dividing screen for boxes V71318 and V71718, yellow. Allows to realize electrically separated compartments inside the box

Covers for flush mounting masonry and hollow wall boxes

**02645**

Round, ø 76 mm, with claws for ø 55-70 mm boxes, urea resin, white

**02646**

Round, ø 94 mm with claws for ø 75-85 mm boxes, urea resin, white

**02647**

Square, 82x82 mm, with claws for ø 55-70 mm boxes, urea resin, white

**02648**

Square, 101x101 mm with claws for ø 75-85 mm boxes, urea resin, white

**02653**

Rectangular, with screws for V71303... boxes, urea resin, white. Fixing centres at 83,5 mm

**V71630**

Rectangular, with screws for V71320 and V71720 boxes, white

ENCLOSURES AND BOXES




Flush mounting boxes

Flush-to-wall covers for flush mounting masonry and hollow wall boxes




V71632
Flush-to-wall cover
for 2-module boxes,
white

Fixing method



Masonry walls.

The box mounting frame is fastened **using claws**, while the cover snaps into the mounting frame without leaving any screws visible.



Hollow walls.

The box mounting frame is fastened **using screws**, while the cover snaps into the mounting frame without leaving any screws visible.

Flush-to-wall covers for flush mounting masonry and hollow wall boxes



V71633
Flush-to-wall cover for
3-module boxes, white



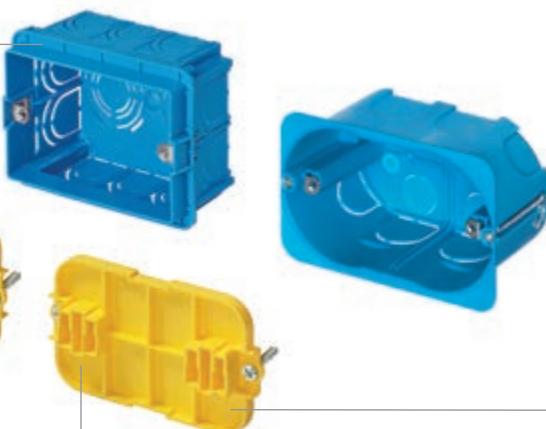
V71634
Flush-to-wall cover for
4-module boxes, white



V71631
Cover for V71318 and V71718 boxes,
snap fixing to V71328 antimortar
cover (provided), white

Flush-to-wall cover: installation on flush mounting boxes

Compatibility.
Can be installed on flush-mounting
masonry and hollow wall boxes.





Reversible mounting frame.
The mounting frame can
be installed on both sides,
depending on the box installa-
tion depth.



Cover.
The cover is installed on the
mounting frame using a snap-on system,
which ensures that the installation is
solid, with optimal aesthetic perfor-
mance as there are no screws.

Maximum aesthetic performance.
As the cover protrudes very little, can be
painted and has a smooth surface, it is invisible
even when installed in full view.

Installation with standard box depth



Installation with increased box depth



ENCLOSURES AND BOXES



Surface mounting boxes


Surface mounting boxes

**09971.A**

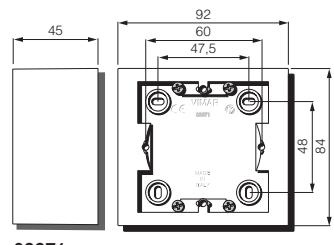
Square, for 1- or 2-reduced-module Idea, RAL 9001 ivory. Idea series: suitable for Classica cover plate only

**09971.01**

Square, for 1- or 2-reduced-module Idea, white. Idea series: suitable for Classica cover plate only

**09971...****09972.01**

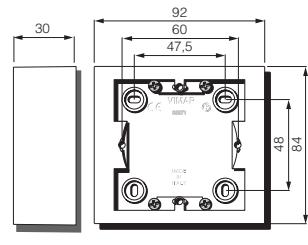
Square, for 1- or 2-reduced-module Idea, white

**09972...****09975.A**

Rectangular, for 3-module, RAL 9001 ivory. Idea: suitable only for Classica cover plates

**09975.01**

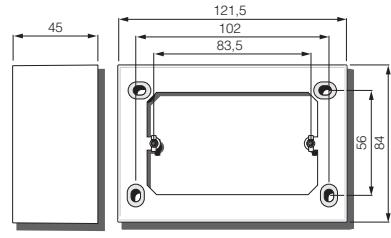
Rectangular, for 3-module, white. Idea: suitable only for Classica cover plates

**09975...****09976.04**

Rectangular, for 3-module, Idea white. Idea: suitable only for Classica cover plates

**09976.14**

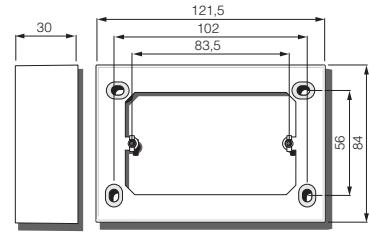
Rectangular, for 3-module, Idea grey. Idea: suitable only for Classica cover plates

**09976...****09983**

Rectangular, for 3-module, grey

**09983.01**

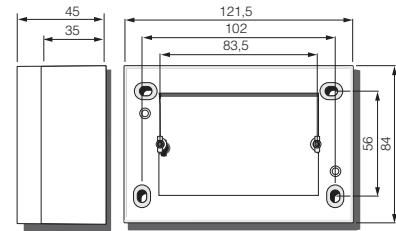Rectangular, for 3-module, white

**09983...**

ENCLOSURES AND BOXES



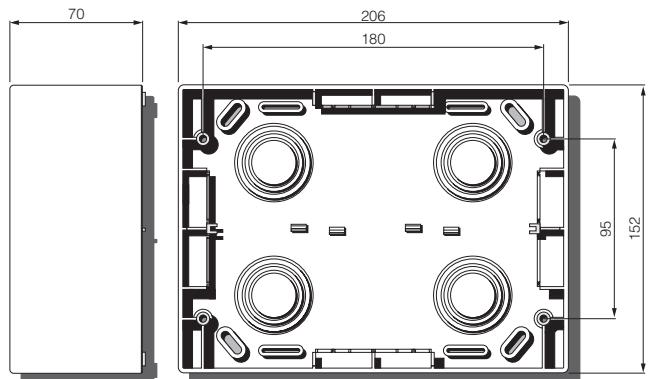
Surface mounting boxes

Surface mounting boxes



09920.01

Rectangular, for 12-(6+6)-module,
white




09920...



09921.01

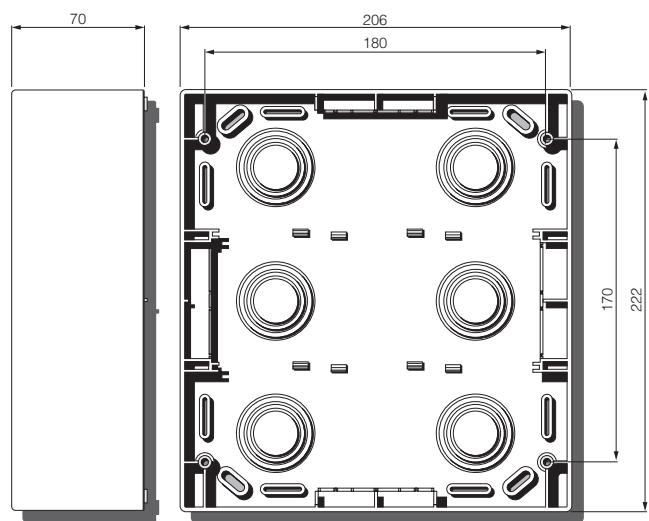Rectangular, for 18-(6+6+6)-module,
white



09921.01

ENCLOSURES AND BOXES



Isoset: IP40 surface mounting boxes

Isoset IP40 boxes



14801
1-module



14802
2-module,
horizontal and vertical
device fixing



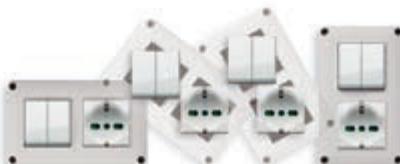
14803
3-module



14804
4-module



14812
4-module (2+2),
horizontal and vertical device
fixing



In the same box it is possible the horizontal and vertical device fixing.




14813
6-module (2+2+2),
horizontal and vertical device
fixing




14814
8-module (2+2+2+2),
horizontal and vertical device
fixing




14815
10-module (2+2+2+2+2),
horizontal and vertical device
fixing




14801, 14802




14803

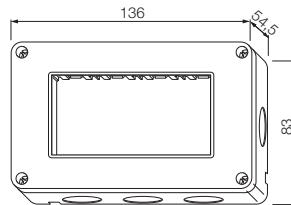


14804

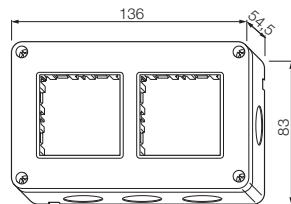


14812

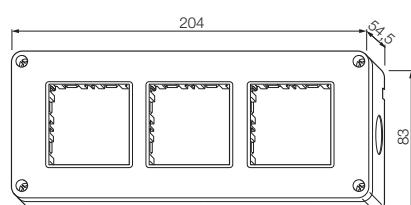

14813

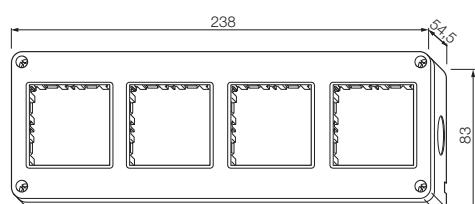

14814

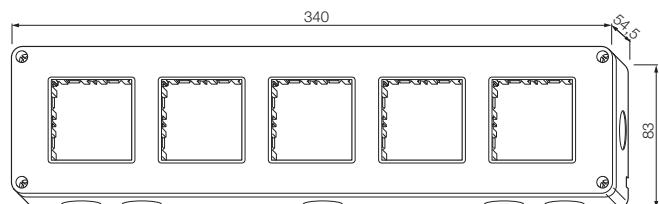

14815

ENCLOSURES AND BOXES



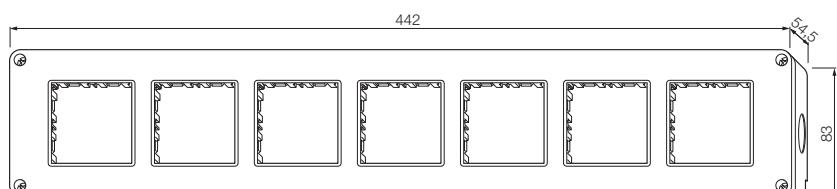
Isoset: IP40 surface mounting boxes

Isoset IP40 boxes



14817

14-module (2+2+2+2+2+2),
horizontal and vertical device
fixing




14817



14827

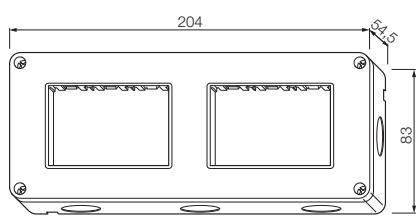6-module (3+3 in horizontal)




14827



14832

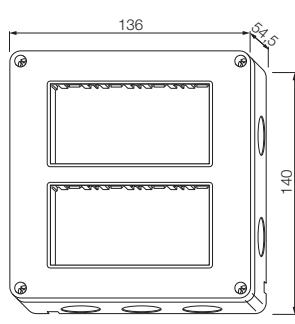8-module (4+4 in vertical)




14832



14833

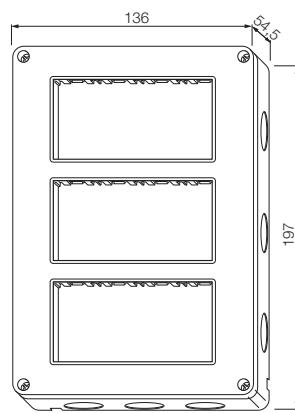12-module (4+4+4 in vertical)




14833



14837

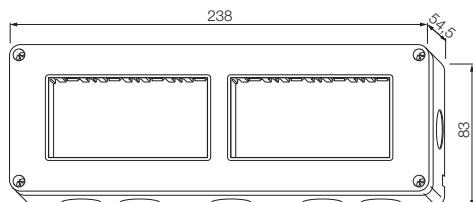8-module (4+4 in horizontal)




14837



14838

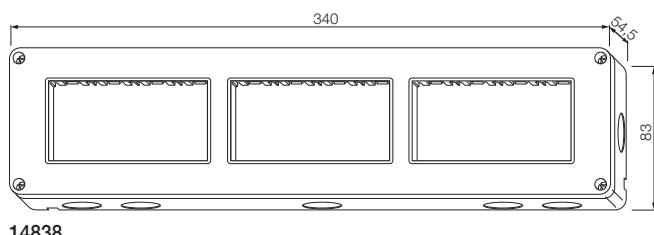12-module (4+4+4 in horizontal)




14838



14839

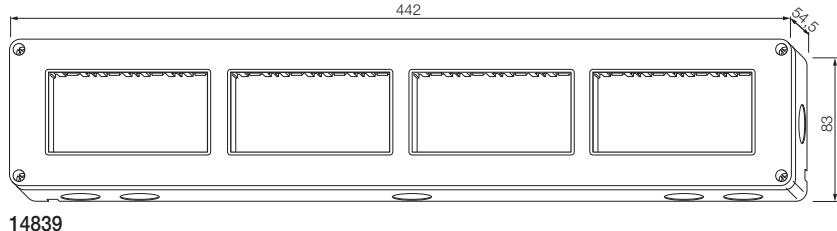16-module (4+4+4+4 in horizontal)



14839

ENCLOSURES AND BOXES



Isoset: IP55 surface mounting boxes


Isoset IP55 boxes



14901
1-module




14902
2-module



14901, 14902




14903
3-module



14903



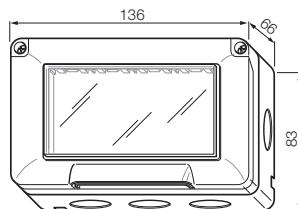
14904
4-module



14904



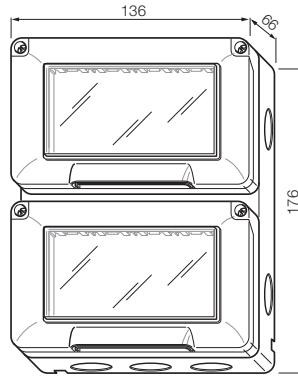
14912
8-module (4+4 in vertical)



14912



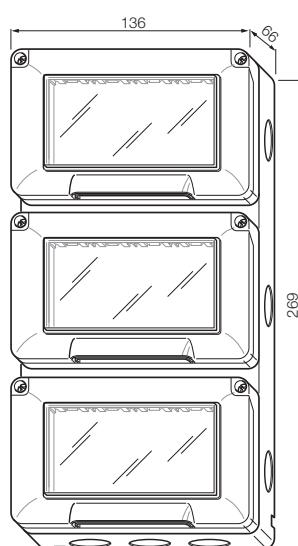14913
12-module (4+4+4 in vertical)



14913

ENCLOSURES AND BOXES



Isoset: IP55 surface mounting covers

Isoset IP55 covers




14931
with claws for
ø 60 mm box,
RAL 7035 grey
- 2 modules



14931.01
with claws for
ø 60 mm box,
white
- 2 modules



14931.14
with claws for
ø 60 mm box,
granite grey
- 2 modules



14931...




14932
with screws, for 60 mm
distance between centres
box, RAL 7035 grey
- 2 modules



14932.01
with screws, for 60
mm distance between
centres box, white
- 2 modules



14932.14
with screws, for 60
mm distance between
centres box, granite
grey - 2 modules



14932...




14943
with screws, for
3-module box,
RAL 7035 grey
- 3 modules



14943.01
with screws, for
3-module box, white
- 3 modules



14943.14
with screws, for
3-module box, granite
grey - 3 modules



14943...



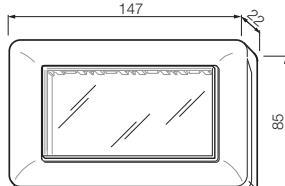
14944
with screws, for
4-module box,
RAL 7035 grey
- 4 modules



14944.01
with screws, for
4-module box, white
- 4 modules



14944.14
with screws, for
4-module box, granite
grey - 4 modules



14944...

ENCLOSURES AND BOXES



Table mounting boxes


Eikon - Table mounting boxes to be completed with frame and cover plate




20784
4-module,
grey



20784.B
4-module,
white



20784...




20787
7-module,
grey




20787.B
7-module,
white



△ 20787.N
7-module,
Next



20787...

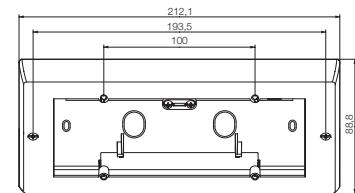


20788
8-module (4+4), with
frame to be completed
with cover plate,
grey




20788.B
8-module (4+4), with
frame to be completed
with cover plate,
white



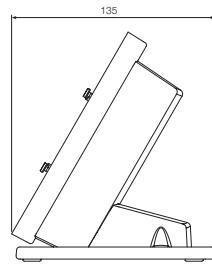△ 20788.N
8-module (4+4), with
frame to be completed
with cover plate,
Next



20788...

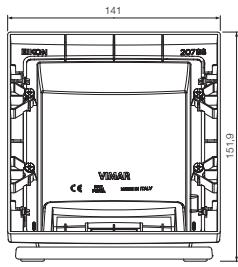

ENCLOSURES AND BOXES



Table mounting boxes

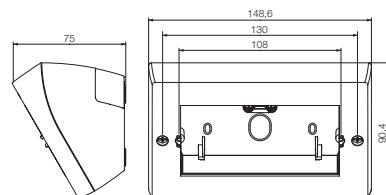
Arké - Table mounting boxes to be completed with frame and cover plate



19784
4-module,
grey



19784.B
4-module,
white




19784...



19787
7-module,
grey



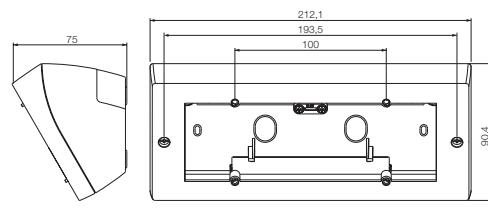19787.B
7-module,
white




19787...



19788
8-module (4+4), with
frame to be completed
with cover plate,
grey



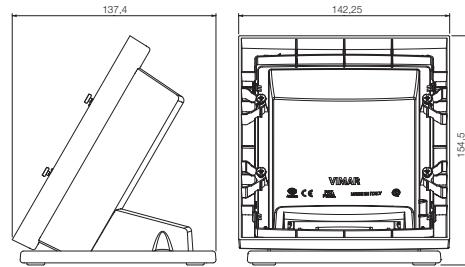19788.B
8-module (4+4), with
frame to be completed
with cover plate,
white



19788...

ENCLOSURES AND BOXES



Table mounting boxes and floor mount turret


Plana - Table mounting boxes to be completed with frame and cover plate




14784
4-module,
white



△ 14784.SL
4-module,
Silver




14784...

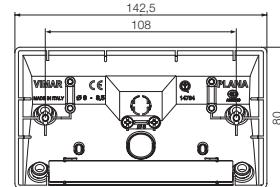


14787
7-module,
white



△ 14787.SL
7-module,
Silver




14787...

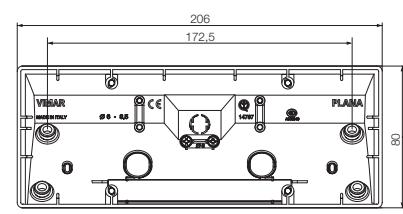


14788
8-module (4+4),
with
frame to be completed
with cover plate,
white



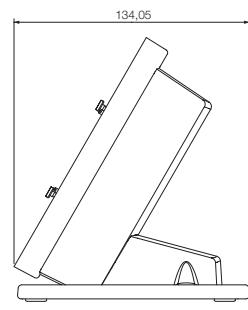△ 14788.SL
8-module (4+4),
with
frame to be completed
with cover plate,
Silver



14788...

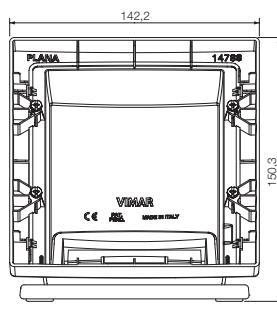

Floor mount turret



V54303
Floor mount turret for Plana, Arké,
Eikon and Neve devices, for installation
in V54903 box.
Supplied with specific support for installation
on floating floors



V54903
Flush box for floor
mount turret - 3 modules
To complete with turret V54303



B.C2006 EN 2009

8007352636538



Viale Vicenza, 14
36063 Marostica VI - Italy
Tel. +39 0424 488 600
Fax +39 0424 488 709
www.vimar.com