



Test Report: HVGC-65-1050

65W Constant Current Mode LED Driver

■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Component Stress Test

■ SAFETY & E.M.C. TEST

Safety Test

E.M.C. Test

■ RELIABILITY TEST

ENVIRONMENT TEST

■ ESIGN VERIFY TEST

OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	CURRENT TOLERANCE	$\pm 5\%$	I/P : 347VAC O/P : LED MODE : 6V~ 62V Ta : 25°C	-0.18 %~ 0.18 %
2	CONSTANT CURRENT REGION	6V ~ 62V	I/P : 347 VAC O/P : FULL LOAD Ta : 25°C	O/P=6V : 1.052A O/P=61V : 1.052A
3	OUTPUT CURRENT ADJUST RANGE	CH1 : 630mA~ 1050mA	I/P : 480 VAC I/P : 347 VAC O/P : LED : 61V Ta : 25°C	0.4304 A~ 1.1440 A/ 480 VAC 0.4313 A~ 1.1442 A/ 347 VAC
4	CURRENT RIPPLE	5.0% max. @rated current	I/P : 230VAC O/P : LED : 31V~61V Ta : 25°C	LED=31V 1.9 % LED=61V 2.9 %
5	SET UP TIME	480 VAC : 400 ms (Max) 347VAC : 400 ms(Max) 230VAC : 500 ms(Max)	I/P : 480 VAC I/P : 347 VAC I/P : 230 VAC O/P : FULL LOAD Ta : 25°C	480 VAC/ 278 ms 347VAC/ 290 ms 230VAC/ 310 ms
6	OVER/UNDERSHOOT TEST	$< \pm 5\%$	I/P : 347 VAC O/P : FULL LOAD Ta : 25°C	TEST : <5 %

7

DIMMER TEST
(B Type only)
SPEC:

※Built-in 3 in 1 dimming function, IP67 rated. Output constant current level can be adjusted through output cable by connecting a resistance or

0 ~ 10Vdc or 10V PWM signal between DIM+ and DIM-.

※Please DO NOT connect "DIM-" to "-V".

※Reference resistance value for output current adjustment (Typical)

Resistance value	Short	10K	20K	30K	40K	50K	60K	70K	80K	90K	100K	OPEN
Output current	0%	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~108%

*1 ~ 10V dimming function for output current adjustment (Typical)

Dimming value	Short	1V	2V	3V	4V	5V	6V	7V	8V	9V	10V	OPEN
Output current	0%	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~108%

*10V PWM signal for output current adjustment (Typical) : Frequency range :100Hz ~ 3KHz

Duty value	Short	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	OPEN
Output current	0%	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~108%

TEST RESULT: I/P : 230 VAC ;Ta : 25℃

1	Resistance value	SHORT	10K	20K	30K	40K	50K	60K	70K	80K	90K	100K	OPEN
	Output current	0.001A	0.117A	0.218A	0.318A	0.419A	0.519A	0.618A	0.718A	0.815A	0.913A	1.005A	1.090A
	%	0.10%	11.14%	20.78%	30.31%	39.90%	49.44%	58.85%	68.41%	77.57%	86.96%	95.70%	103.81%
2	Dimming value	SHORT	1V	2V	3V	4V	5V	6V	7V	8V	9V	10V	OPEN
	Output current	0.001A	0.124A	0.230A	0.332A	0.434A	0.539A	0.654A	0.750A	0.856A	0.960A	1.050A	1.090A
	%	0.10%	11.81%	21.92%	31.62%	41.30%	51.31%	62.29%	71.43%	81.52%	91.44%	100.02%	103.82%
3	Duty value	SHORT	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	OPEN
	Output current	0.001A	0.119A	0.221A	0.324A	0.428A	0.531A	0.636A	0.739A	0.843A	0.947A	1.051A	1.090A
	%	0.10%	11.30%	21.07%	30.89%	40.72%	50.59%	60.53%	70.40%	80.29%	90.17%	100.08%	103.81%

INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	180VAC~528VAC	I/P : TESTING O/P : FULL LOAD Ta : 25°C	169V~528V
			I/P : LOW-LINE-3V=177V HIGH-LINE+10V=538 V O/P : FULL/MIN LOAD ON : 30 Sec . OFF : 30 Sec 10MIN (AC POWER ON/OFF NO DAMAGE)	TEST : OK
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE	I/P : 180VAC ~ 528 VAC O/P : FULL~MIN LOAD Ta : 25°C	TEST : OK
3	POWER FACTOR	0.98 / 230 VAC(TYP) 0.97 / 277VAC(TYP) 0.95 /347 VAC(TYP) 0.93 / 480VAC(TYP)	I/P : 230VAC I/P : 277VAC I/P : 347VAC I/P : 480VAC O/P : FULL LOAD Ta : 25°C	PF= 1 / 230 VAC PF= 0.991 / 277 VAC PF= 0.977 / 347VAC PF= 0.971 / 480VAC
4	EFFICIENCY	90 % (TYP)	I/P : 347 VAC O/P : FULL LOAD Ta : 25°C	91.05 %
5	INPUT CURRENT	347V/ 0.22 A (TYP) 480V/ 0.18 A (TYP)	I/P : 347 VAC I/P : 480 VAC O/P : FULL LOAD Ta : 25°C	I = 0.209 A/ 347 VAC I = 0.155 A/ 480 VAC
6	INRUSH CURRENT	230V/ 25 A (TYP) (twidth=420us measured at 50% Ipeak) COLD START	I/P : 230VAC O/P : FULL LOAD Ta : 25°C	I = 20 A/ 230VAC T50= 406 us
7	LEAKAGE CURRENT	< 0.75 mA / 480 VAC	I/P : 480 VAC O/P : Min LOAD Ta : 25°C	L-FG : 0.27 mA N-FG : 0.3 mA
8	TOTAL HARMONIC DISTORTION	Total harmonic distortion will be lower than 20% when output loading is 60% or higher at 230VAC / 277VAC / 347VAC	I/P : 230VAC I/P : 277VAC I/P : 347VAC O/P : 60% LOAD Ta : 25°C	THD : 7.16 % THD : 9.63 % THD : 14.49 %
		Total harmonic distortion will be lower than 20% when output loading is 75% or higher at 480VAC	I/P : 480VAC O/P : 75% LOAD Ta : 25°C	THD : 12.07 %

PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER VOLTAGE PROTECTION	CH1 : 65 V ~ 72 V	I/P : 480 VAC I/P : 347 VAC O/P : MIN LOAD Ta : 25°C	68.97V/ 480VAC 68.92V/ 347 VAC Shut down o/p voltage with auto-recovery or re-power on to recovery
2	OVER TEMPERATURE PROTECTION	SPEC : NO DAMAGE	I/P : 347 VAC O/P : FULL LOAD	O.T.P. Active Shut down o/p voltage, recovers automatically after temperature goes down
3	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P : 528 VAC O/P : FULL LOAD Ta : 25°C	NO DAMAGE Constant current limiting, recovers automatically after fault condition is removed

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	Power Transistor (D to S) or (C to E) Peak Voltage	Q3 Rated : 9A/950V	I/P : High-Line +3V = 531 V O/P : (1)Full Load Turn on (2) Output Short (3)Full load continue Ta : 25°C	(1) 668 V (2) 284 V (3) 580 V
2	Diode Peak Voltage	D101 Rated : 10A/200V	I/P : High-Line +3V = 531 V O/P : (1)Full Load Turn on (2)Output Short (3)Full load continue Ta : 25°C	(1) 187 V (2) 127 V (3) 181 V
3	Input Capacitor Voltage	C5 Rated : 22u/450V	I/P : High-Line +3V = 531 V O/P : (1)Full Load Turn on /Off (2) Min load Turn on /Off (3)Full Load /Min load Change Ta : 25°C	(1) 442 V (2) 434 V (3) 442 V
4	Control IC Voltage Test	U1 Rated : 10.3V~22.5V U2 Rated : 11V~28V	I/P : High-Line +3V = 531 V O/P : (1)Full Load Turn on /Off (2) Min load Turn on /Off (3)Full Load /Min load Change (1)Full Load Turn on /Off (2) Min load Turn on /Off (3)Full Load /Min load Ta : 25°C	(1) 19.2 V (2) 19.2 V (3) 19.2 V (4) 16.4 (5) 16.3 (6) 16.4
5	Power Transistor (D to S) or (C to E) Peak Voltage	Q1 Rated : 9A/950V	I/P : High-Line +3V = 531 V O/P : (1)Full Load Turn on (2) Output Short (3)Full load continue Ta : 25°C	(1) 944 V (2) 845 V (3) 852 V

SAFETY & E.M.C. TEST

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P : 3.75 KVAC/min I/P-FG : 2 KVAC/min O/P-FG : 1.5 KVAC/min	I/P-O/P : 4 KVAC/min I/P-FG : 2.4 KVAC/min O/P-FG : 1.8 KVAC/min Ta : 25°C	I/P-O/P : 3.1 mA I/P-FG : 2.922 mA O/P-FG : 1.725 mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P : 500VDC>100MΩ I/P-FG : 500VDC>100MΩ O/P-FG : 500VDC>100MΩ	I/P-O/P : 500 VDC I/P-FG : 500 VDC O/P-FG : 500 VDC Ta : 25°C /70%RH	I/P-O/P : 6.16 GΩ I/P-FG : 5.75 GΩ O/P-FG : 3.61 GΩ NO DAMAGE
3	GROUNDING CONTINUITY	FG(PE) TO CHASSIS OR TRACE < 100 mΩ	40 A / 2min Ta : 25°C / 70%RH	23 mΩ

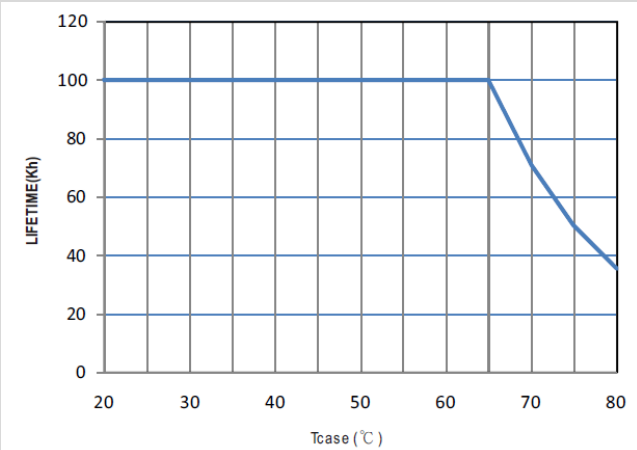
E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 CLASS C	I/P:230/347VAC/60HZ O/P:100/75/50/25%ELECTRONIC LOAD O/P:100%LED LOAD Ta:25°C	PASS
2	CONDUCTION	EN55015 CLASS B	I/P: 230/347VAC (50HZ) O/P:FULL/50% LOAD Ta:25°C	PASS Test by certified Lab
3	RADIATION	EN55015 CLASS B	I/P: 230/347 VAC (50HZ) O/P:FULL LOAD Ta:25°C	PASS Test by certified Lab
4	E.S.D	EN61000-4-2 LIGHT INDUSTRY AIR:8KV / Contact:4KV	I/P:230/347 VAC/50HZ O/P:FULL LOAD Ta:25°C	CRITERIA A
5	E.F.T	EN61000-4-4 LIGHT INDUSTRY INPUT : 1KV	I/P: 230/347 VAC/50HZ O/P:FULL LOAD Ta:25°C	CRITERIA A
6	SURGE	IEC61000-4-5 INDUSTRY L-N :2KV L,N-PE:4KV	I/P: 230/347 VAC/50HZ O/P:FULL LOAD Ta:25°C	CRITERIA A

RELIABILITY TEST

ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																								
1	TEMPERATURE RISE TEST	MODEL : HVGC-65-700 1. ROOM AMBIENT BURN-IN : 1.5 HRS I/P : 347VAC O/P : FULL LOAD Ta= 34.2℃ 2. HIGH AMBIENT BURN-IN : 1.5 HRS I/P : 347VAC O/P : FULL LOAD Ta= 58.9℃ <table><tr><td>NO</td><td>Position</td><td>ROOM AMBIENT Ta= 34.2 ℃</td><td>HIGH AMBIENT Ta= 58.9 ℃</td></tr><tr><td>1</td><td>BD1</td><td>51.5℃</td><td>75.7℃</td></tr><tr><td>2</td><td>Q1</td><td>57.6℃</td><td>80.9℃</td></tr><tr><td>3</td><td>Q3</td><td>58.8℃</td><td>81.8℃</td></tr><tr><td>4</td><td>T1</td><td>61.5℃</td><td>84.2℃</td></tr><tr><td>5</td><td>C5</td><td>49.9℃</td><td>78.4℃</td></tr><tr><td>6</td><td>RTH2</td><td>53.5℃</td><td>76.9℃</td></tr><tr><td>7</td><td>C102</td><td>56.8℃</td><td>80.1℃</td></tr><tr><td>8</td><td>U2</td><td>54.1℃</td><td>77.6℃</td></tr><tr><td>9</td><td>D101</td><td>59.5℃</td><td>82.7℃</td></tr></table>			NO	Position	ROOM AMBIENT Ta= 34.2 ℃	HIGH AMBIENT Ta= 58.9 ℃	1	BD1	51.5℃	75.7℃	2	Q1	57.6℃	80.9℃	3	Q3	58.8℃	81.8℃	4	T1	61.5℃	84.2℃	5	C5	49.9℃	78.4℃	6	RTH2	53.5℃	76.9℃	7	C102	56.8℃	80.1℃	8	U2	54.1℃	77.6℃	9	D101	59.5℃	82.7℃
NO	Position	ROOM AMBIENT Ta= 34.2 ℃	HIGH AMBIENT Ta= 58.9 ℃																																									
1	BD1	51.5℃	75.7℃																																									
2	Q1	57.6℃	80.9℃																																									
3	Q3	58.8℃	81.8℃																																									
4	T1	61.5℃	84.2℃																																									
5	C5	49.9℃	78.4℃																																									
6	RTH2	53.5℃	76.9℃																																									
7	C102	56.8℃	80.1℃																																									
8	U2	54.1℃	77.6℃																																									
9	D101	59.5℃	82.7℃																																									
2	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P : 528VAC/180VAC O/P : 100 % LOAD Ta= -40 ℃	TEST : OK																																								
3	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 60℃ NO DAMAGE	I/P : 531 VAC O/P : FULL LOAD Ta= 60 ℃ HUMIDITY= 95 %R.H	TEST : OK																																								
4	TEMPERATURE COEFFICIENT	±0.03%(0~50℃)	I/P : 347 VAC O/P : FULL LOAD	± 0%(0~50℃)																																								
5	STORAGE TEMPERATURE TEST	1. Thermal shock Temperature : -45℃~ +90℃ 2. Temperature change rate : 25℃ / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 5 CYCLE 5. Input/Output condition : STATIC		OK																																								
6	THERMAL SHOCK TEST	1. Thermal shock Temperature : -40℃~ +65℃ 2. Temperature change rate : 25℃ / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 10 CYCLE 5. Input/Output condition : 347VAC/Full Load AC ON/OFF TEST turn on 58sec ; turn off 2sec		OK																																								
7	VIBRATION TEST	1 Carton & 1 Set (1) Waveform : Sine Wave (2) Frequency : 10~500Hz (3) Sweep Time : 12min/sweep cycle (4) Acceleration : 5G (5) Test Time : 72min in each axis (X.Y.Z) (6) Ta : 25℃		TEST : OK																																								

8	CAPACITOR LIFE CYCLE	HVGC-65-700 :SUPPOSE C102 IS THE MOST CRITICAL COMPONENT (1) I/P : 347VAC O/P : FULL LOAD Ta= 25 °C LIFE TIME (2) I/P : 347VAC O/P : FULL LOAD Ta= 60 °C LIFE TIME (3) I/P : 347VAC O/P : 75% LOAD Ta= 60 °C LIFE TIME (4) I/P : 347VAC O/P : 50% LOAD Ta= 60 °C LIFE TIME	(1) 634558 HRS (2) 61853 HRS (3) 74012 HRS (4) 89337 HRS
9	MTBF	Conducted by Parts Stress Analysis Prediction 611K hrs min. Telcordia SR-332 (Bellcore) ; 202.7K hrs min. MIL-HDBK-217F (25°C)	
10	DMTBF/Accelerated Life Test	Demonstration Mean Time Between Failure (Expected Life): Above 50,000 hours @ Tcase 75 °C 	

RESULT	TESTER	REVIEW	APPROVAL
PASS	DANIEL GAO	SANFORD SU	VINCENT TSENG

12.10.30 A50-F031