
Shared components: Device 4inputs/outs KNX

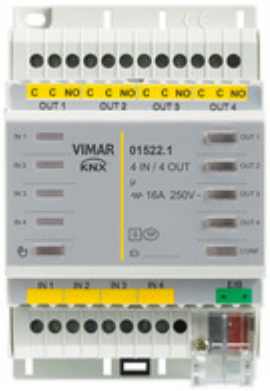

01522.1

Smart systems&products / KNX / Shared components / DIN devices

Device 4inputs/outs KNX

Device with 4 inputs/outputs, 4 NO relay outputs 16 A 250 V~, programmable with control function for lights, roller shutters with slat orientation, push buttons for local control, 4 programmable digital inputs for potential-free contacts, KNX standard, installation on DIN rail (60715 TH35), occupies 4 modules size 17.5 mm

Product Status

3 - Active

Minimum order quantity

1 NR


Sheets, Manuals, Documentation

- Multilanguage instructions sheet (1042 kb)
- Manuale installatore (3360 kb)
- Manuale installatore (3307 kb)

Product Software

- DB_ComponentiAutomazione_KNX_01.16_20210920.zip
- DB_ComponentiAutomazione_KNX_01.19_20230331.zip
- DB_ComponentiAutomazione_KNX_01.20_20240917.zip
- DB_ComponentiAutomazione_KNX_01.21_20250224.zip


Drawings

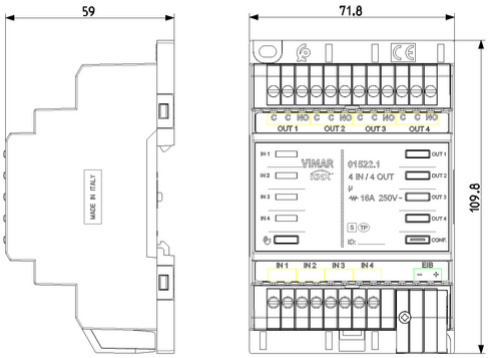

Space view



Backside view

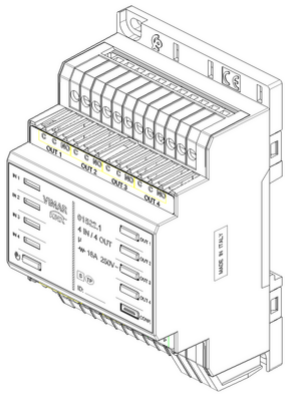

3D View

Certifications

- **00. CE Marking - EU**
- **27. KNX (download)**
- **46. UK PSTI compliance (download)**
- **99. WEEE Directive (download)**

Technical data

Class group: Installation bus systems

Class: I/O device for bus system

Bus system KNX: Yes

Bus system KNX-RF (Radio Frequency): No

Bus system radio frequency: No

Bus system LON: No

Bus system Powernet: No

Width in number of modular spacings: 4

With bus connection: Yes

LED controlling: Yes

With LED indication: Yes

Local operation/hand operation: Yes

Suitable for C-load: No

With switch function: Yes

Rated current: 16,00 A

External signal voltage necessary: No

Different phases connectable: Yes

Packaging

8007352644342

Qtà	1 NR
Dim	11.7x10.8x7.1 [cm]
Weight	283 [g]

You may also be interested in



01523.1 - 250V 16A 4-output actuator KNX

Legal

Vimar reserves the right to change at any time and without notice the characteristics of the products reported.Installation should be carried out by qualified staff in compliance with the current regulations regarding the installation of electrical equipment in the country where the products are installed.For the terms of use of the information on the product info sheet see Condizioni di utilizzo.