TEST REPORT: EPS-65S-7.5

65W Single Output Switching Power Supply

■ DESIGN VERIFY TEST

- Output Function Test
- Input Function Test
- Protection Function Test
- Component Stress Test

■ SAFETY & E.M.C. TEST

- Safety Test
- E.M.C. Test


■ RELIABILITY TEST

- ENVIRONMENT TEST


DESIGN VERIFY TEST
OUTPUT FUNCTION

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OUTPUT VOLTAGE ADJUST RANGE	CH1: 7.12V ~ 8.30V	I/P : 230VAC O/P: MIN LOAD TA : 25℃	CH1: 6.90V ~ 8.54V
2	OUTPUT VOLTAGE TOLERANCE (Max)	V1 : 2.0% ~ -2.0%	I/P : 115VAC / 264VAC O/P: FULL / MINLOAD TA= 25℃	V1: 0.24% ~ -0.24%
3	LINE REGULATION (MAX.)	V1 : 0.5% ~ -0.5%	I/P : 115VAC / 264VAC O/P: FULL LOAD TA : 25℃	V1: 0.00% ~ 0.00%
4	LOAD REGULATION (MAX.)	V1 : 2.0% ~ -2.0%	I/P : 230VAC O/P: MIN LOAD ~ FULL LOAD TA : 25℃	V1: 0.24% ~ -0.24%
5	OVER/UNDERSHOOT TEST	< ±10%	I/P : 230VAC O/P: FULL LOAD TA : 25℃	TEST< 2.674 %
6	RIPPLE & NOISE(Max)	V1 : 80 mVp-p	I/P : 230VAC O/P: FULL LOAD TA : 25℃	V1 : 54.4 mVp-p

high frequency :

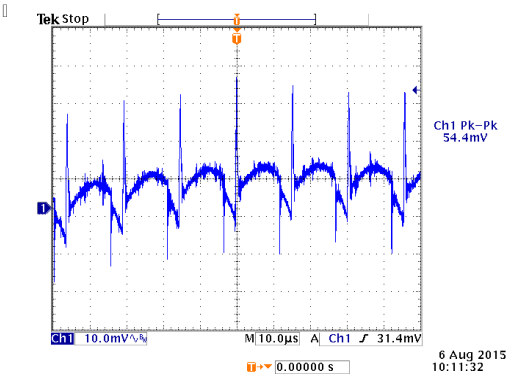


low frequency :

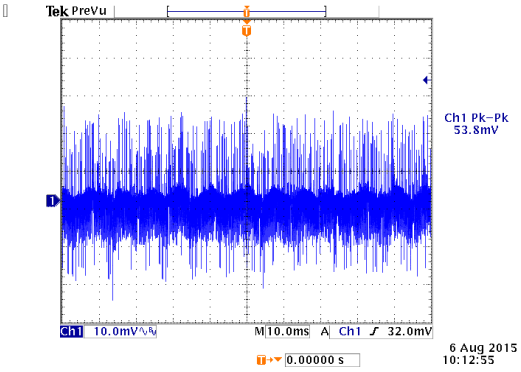


7	SET UP TIME (MAX.)	230VAC : 500ms 115VAC : 500ms	I/P : 230VAC I/P : 115VAC	230VAC 84ms 115VAC 54ms

INPUT=230VAC/50HZ @ FULL LOAD
CH1 : Output Voltage CH2 : AC Input Voltage

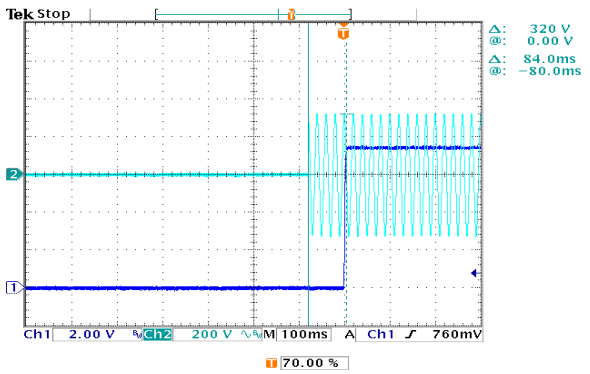


INPUT=115VAC/60HZ @ FULL LOAD
CH1 : Output Voltage CH2 : AC Input Voltage

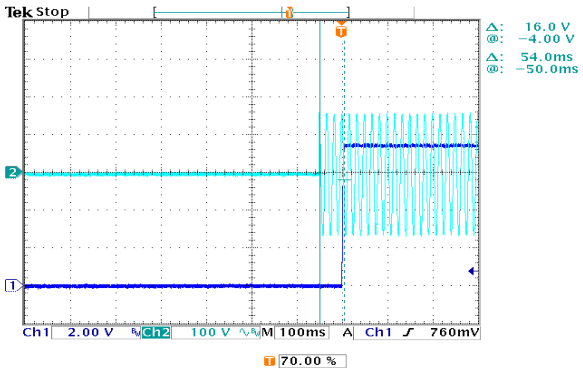


	RISE TIME (MAX.)	230VAC : 30ms 115VAC : 30ms	I/P : 230VAC I/P : 115VAC O/P: FULL LOAD TA : 25℃	230VAC : 4.0ms 115VAC : 3.8ms

8

INPUT=230VAC/50HZ @ FULL LOAD
CH1 : Output Voltage

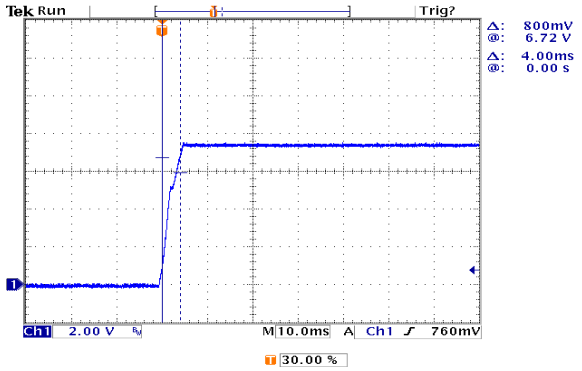


INPUT=115VAC/60HZ @ FULL LOAD
CH1 : Output Voltage

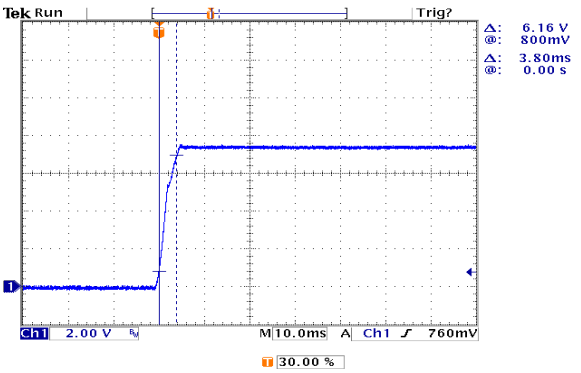


HOLD UP TIME (TYP.)	230VAC	:	30ms	I/P : 230VAC I/P : 115VAC O/P: FULL LOAD TA : 25℃	230VAC	:	64.8ms
	115VAC	:	12ms		115VAC	:	13.6ms

9

INPUT=230VAC/50HZ @ FULL LOAD
CH1 : Output Voltage CH2 : AC Input Voltage

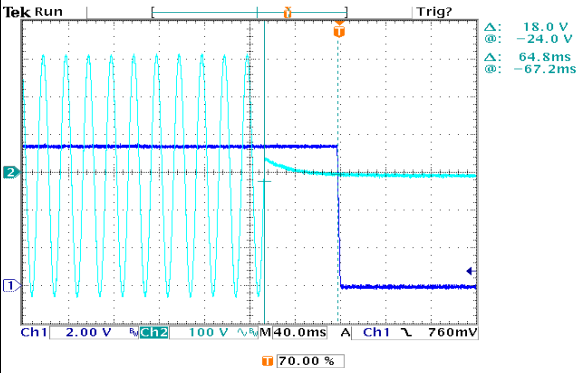


INPUT=115VAC/60HZ @ FULL LOAD
CH1 : Output Voltage CH2 : AC Input Voltage

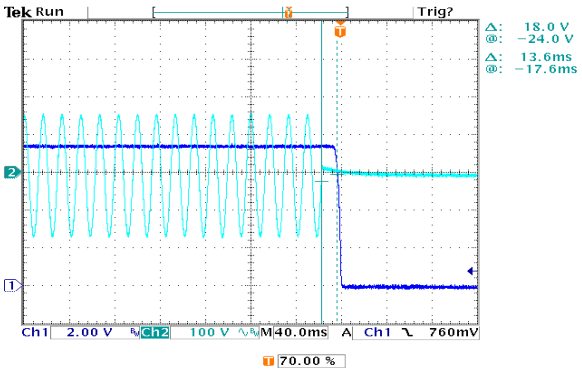


DYNAMIC LOAD	V1 :	1500	mVp-p	I/P : 230VAC O/P: (1)Full/Min load 50%duty/120HZ (2)Full/Min load 50%duty/1KHZ TA : 25℃		(1).	(2).	unit:mVp-p
					V1:	940.0mv	416.0mv	

10

FULL /50% LOAD 50%DUTY / 120HZ

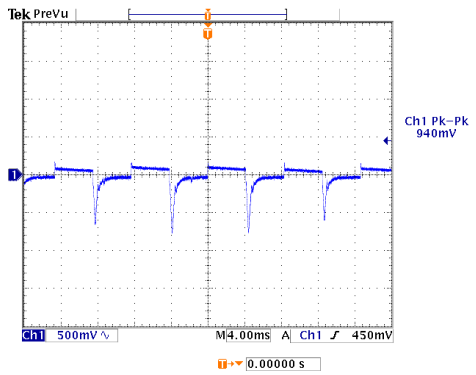


FULL /50% LOAD 50%DUTY / 1KHZ

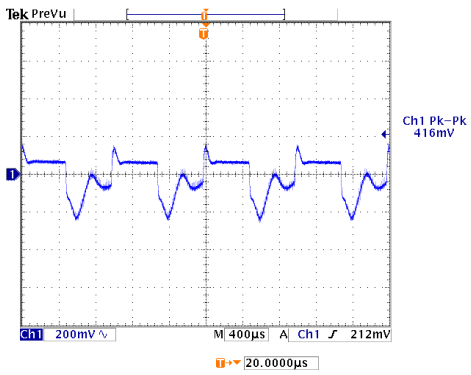


INPUT FUNCTION TEST


NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
			I/P : TESTING O/P : FULL LOAD Ta : 25℃	68.5VAC ~ 264VAC
1	INPUT VOLTAGE RANGE	80VAC ~ 264VAC	I/P : LOW-LINE = 77VAC HIGH-LINE = 267VAC O/P : FULL/MIN LOAD ON:30 Sec ; OFF:30 Sec 10MIN (POWER ON/OFF NO DAMAGE)	TEST : OK
2	INPUT FREQUENCY RANGE	47HZ ~ 63HZ NO DAMAGE	I/P : 115VAC ~ 264VAC O/P : FULL~MIN LOAD Ta : 25℃	TEST : OK
3	INPUT CURRENT (TYP.)	1 / 230VAC 1.5 / 115VAC	I/P : 230VAC I/P : 115VAC O/P: FULL LOAD TA : 25℃	I= 0.568 / 230VAC I= 0.993 / 115VAC
4	LEAKAGE CURRENT	< 0.25mA	I/P : 264VAC O/P: MIN LOAD TA : 25℃	L-FG: 0.082 mA N-FG: 0.082 mA
5	NO LOAD POWER CONSUMPTION	< 0.10W	I/P : 230VAC O/P: MIN LOAD TA : 25℃	< 0.0438 W
6	EFFICIENCY (TYP.)	85.0%	I/P : 230VAC O/P: FULL LOAD TA : 25℃	86.98 %
7	INRUSH CURRENT (TYP.)	50A / 230VAC 30A / 115VAC twidth= 0 us measured at 50% Ipeak COLD START	I/P : 230VAC I/P : 115VAC O/P: FULL LOAD TA : 25℃	I= 27.20A / 230VAC I= 26.10A / 115VAC

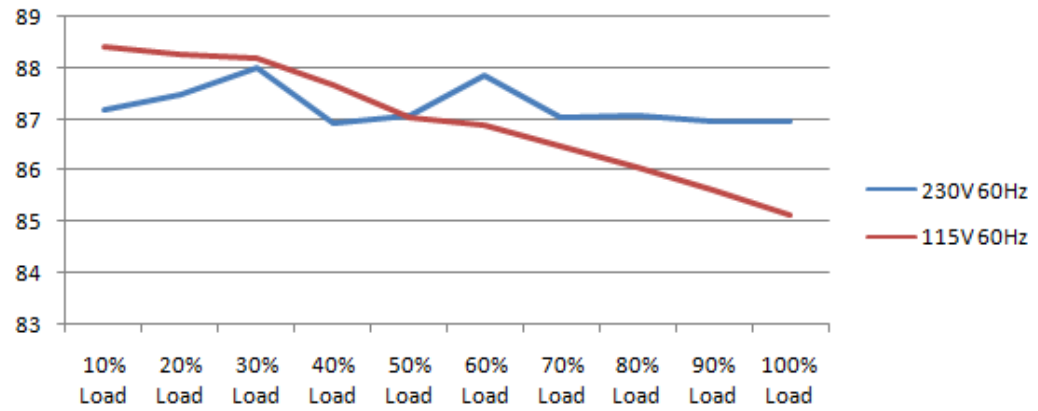

INPUT=230VAC/50HZ @ FULL LOAD
CH2 : Input current (1V=1A) CH4 : AC Input Voltage

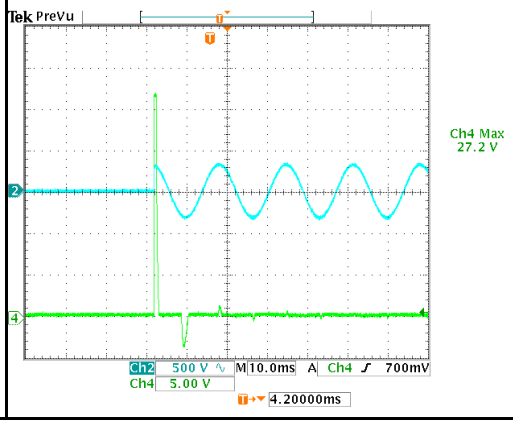

INPUT=115VAC/50HZ @ FULL LOAD
CH2 : Input current (1V=1A) CH4 : AC Input Voltage

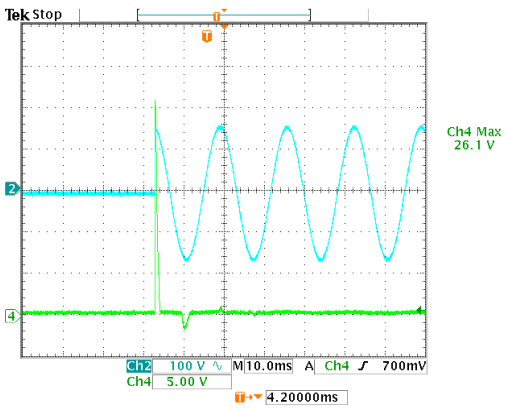

PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER LOAD PROTECTION	115% ~ 150%	I/P: 264VAC I/P: 230VAC I/P: 115VAC O/P: TESTING TA : 25℃	129.5% 264VAC 135.1% 230VAC 125.8% 115VAC Hiccup Mode
2	OVER VOLTAGE PROTECTION	8.62V ~ 11.30V	I/P: 264VAC I/P: 230VAC I/P: 80VAC O/P: MIN LOAD TA : 25℃	10.26V 264VAC 10.25V 230VAC 10.26V 80VAC Shut down Re- power ON
3	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 264VAC I/P: 80VAC O/P: FULL LOAD Ta: 25℃	NO DAMAGE Hiccup Mode

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Power Transistor	Q1 Rated : 600V 11.0A	I/P : 267VAC VDS : O/P : (1)Full Load Turn on (2) Output Short (3)Fulll load continue Ta : 25℃	VIN: 267VAC VDS: (1). 568.00V (2). 536.00V (3). 556.00V
2	Input Capacitor	C5 Rated : 100uf 400V	I/P : 267VAC O/P : (1)Full Load Turn on /Off (2)Min load Turn on /Off (3)Full Load /Min load Change Ta : 25℃	(1). 354.00V (2). 356.00V (3). 356.00V
3	Control IC	U1 Rated : 28.0V (max) -0.3V (min)	I/P : 267VAC O/P : (1)Full Load (2)Output Short (3)O.L.P (4)Low Line No Load Vo(min) Ta : 25℃	U1 (1). 25.30V (2). 21.80V (3). 25.30V (4). 19.70V
4	O/P Diode	D100 Rated : 60V 20.0A	I/P : 267VAC O/P : (1)Full Load Turn on (2) Output Short (3)Fulll load continue Ta : 25℃	(1). 47.40V (2). 44.00V (3). 48.20V
5	Clamp Diode	D5 Rated : 1000V 1.0A	I/P : 267VAC O/P : (1)Fulll load continue Ta : 25℃	(1). 512.00V

■SAFETY & E.M.C. TEST

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P : 3.000KVAC /min	I/P-O/P: 3.300KVAC /min Ta : 25℃	I/P-O/P: 1.36mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P : 500VDC>100MΩ	I/P-O/P: 500VDC Ta : 25℃/70%RH	I/P-O/P: 9999MΩ NO DAMAGE

E.M.C. TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 CLASS A	I/P : 230VAC /50HZ O/P : FULL LOAD Ta : 25℃	PASS
		EN55022	I/P : 230VAC /50HZ	PASS

2	CONDUCTION	CLASS B	O/P : FULL LOAD / 50% LOAD Ta : 25℃	Test by certified Lab
3	RADIATION	EN55022 CLASS B	I/P : 230VAC /50HZ O/P : FULL LOAD Ta : 25℃	PASS Test by certified Lab
4	E.S.D	EN61000-4-2 INDUSTRY AIR：8KV / Contact：4KV	I/P : 230VAC /50HZ O/P : FULL LOAD Ta : 25℃	CRITERIA A
5	E.F.T	EN61000-4-4 INDUSTRY INPUT： 2KV	I/P : 230VAC /50HZ O/P : FULL LOAD Ta : 25℃	CRITERIA A
6	SURGE	IEC61000-4-5 INDUSTRY L-N：2KV;L/N-PE：4KV	I/P : 230VAC /50HZ O/P : FULL LOAD Ta : 25℃	CRITERIA A

■RELIABILITY TEST

<table>
<tr><th>NO</th><th>TEST ITEM</th><th>SPECIFICATION</th><th>TEST CONDITION</th><th>RESULT</th></tr>
<tr><td>1</td><td>TEMPERATURE RISE TEST</td><td>MODEL : EPS-65S-7.5
1. ROOM AMBIENT BURN-IN : 1.0hrs
IP: 230VAC O/P: 100% LOAD TA= 29.6℃
2. HIGH AMBIENT BURN-IN : 1.0hrs
IP: 230VAC O/P: 100% LOAD TA= 50.1℃
<table>
<tr><th>NO.</th><th>Position</th><th>ROOM AMBIENT 29.6℃</th><th>HIGH AMBIENT Ta： 50.1℃</th></tr>
<tr><td>1</td><td>LF1</td><td>50.5℃</td><td>68.7℃</td></tr>
<tr><td>2</td><td>LF2</td><td>53.7℃</td><td>72.7℃</td></tr>
<tr><td>3</td><td>BD1</td><td>83.3℃</td><td>101.1℃</td></tr>
<tr><td>4</td><td>Q1</td><td>88.8℃</td><td>106.6℃</td></tr>
<tr><td>5</td><td>C5</td><td>64.0℃</td><td>82.1℃</td></tr>
<tr><td>6</td><td>C40</td><td>78.5℃</td><td>96.1℃</td></tr>
<tr><td>7</td><td>T1</td><td>80.9℃</td><td>98.2℃</td></tr>
<tr><td>8</td><td>D100</td><td>100.9℃</td><td>117.6℃</td></tr>
<tr><td>9</td><td>D101</td><td>101.8℃</td><td>117.2℃</td></tr>
<tr><td>10</td><td>C105</td><td>75.1℃</td><td>94.3℃</td></tr>
<tr><td>11</td><td>C106</td><td>71.9℃</td><td>91.0℃</td></tr>
<tr><td>12</td><td>C107</td><td>56.3℃</td><td>74.5℃</td></tr>
<tr><td>13</td><td>L101</td><td>62.0℃</td><td>79.6℃</td></tr>
<tr><td>14</td><td>U1</td><td>69.9℃</td><td>87.2℃</td></tr>
</table></td><td></td></tr>
<tr><td>2</td><td>OVER LOAD BURN-IN TEST</td><td>NO DAMAGE
1 HOUR (MIN)</td><td>I/P : 230VAC
O/P : 129% LOAD
Ta : 25℃</td><td>TEST：OK</td></tr>
<tr><td>3</td><td>LOW TEMPERATURE TURN ON TEST</td><td>NO DAMAGE
1 HOUR (MIN)</td><td>I/P : 264VAC / 115VAC
O/P : FULL LOAD
Ta : -30.0℃</td><td>TEST：OK</td></tr>
<tr><td>4</td><td>HIGH HUMIDITY
HIGH TEMPERATURE
HIGH VOLTAGE TEST</td><td>AFTER 12 HOURS
IN CHAMBER ON
CONTROL 50℃
NO DAMAGE</td><td>I/P : 272VAC
O/P : FULL LOAD
Ta : 50℃
HUMIDITY= 95.0% RH</td><td>TEST：OK</td></tr>
<tr><td>5</td><td>TEMPERATURE COEFFICIENT</td><td>±0.03% /℃(0~50℃)</td><td>I/P : 230VAC
O/P : FULL LOAD</td><td>±0.0140% /℃(0~50℃)</td></tr>
<tr><td>6</td><td>STORAGE TEMPERATURE TEST</td><td>1. Thermal shock Temperature： -40℃ ~ +85℃
2. Temperature change rate ：25℃ / MIN
3. Dwell time low and high temperature ： 30 MIN/EACH
4. Total test cycle：5 CYCLE
5. Input/Output condition： STATIC</td><td></td><td>TEST：OK</td></tr>
<tr><td>7</td><td>THERMAL SHOCK TEST</td><td>1. Thermal shock Temperature： -35℃ ~ +55℃
2. Temperature change rate ：25℃ / MIN
3. Dwell time low and high temperature ： 30 MIN/EACH
4. Total test cycle：10 CYCLE
5. Input/Output condition：
230VAC Full Load AC ON/OFF test turn on 58sec；turn off 2sec</td><td></td><td>TEST：OK</td></tr>
<tr><td></td><td></td><td>1 Carton & 1 Set
(1) Waveform： Sine Wave</td><td></td><td>TEST：OK</td></tr>
</table>

8	VIBRATION TEST	(2) Frequency：10~500Hz (4) Acceleration： 2G (5) Test Time：60min in each axis (X.Y.Z) (6) Ta：25℃								
9	CAPACITOR LIFE CYCLE		:SUPPOSE	C106	IS THE MOST CRITICAL COMPONENT					
		(1) I/P：	230VAC	O/P：FULL LOAD	Ta=	25.0℃	LIFE TIME	(1).	158118	HRS
		(2) I/P：	230VAC	O/P：FULL LOAD	Ta=	50.0℃	LIFE TIME	(2).	17782.8	HRS
		(3) I/P：	230VAC	O/P：75% LOAD	Ta=	50.0℃	LIFE TIME	(3).	44588.4	HRS
		(4) I/P：	230VAC	O/P：50% LOAD	Ta=	50.0℃	LIFE TIME	(4).	158118	HRS
10	MTBF	MIL-HDBK-217F TOTAL FAILURE RATE： 959.1 KHRS								
11	DMTBF /Accelerated Life test	Demonstration Mean Time Between Failure (Expected Life): Above 50000HRS @ TA 50℃								

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	FRANK	GESG	WANGDZ

2007/3/20 A50-S014