




Motion S

surface/ suspended system

- Extruded aluminium profile with 26mm width groove in black or white
- For wall/ceiling surface mounting or suspended mounting(1500mm cable suspension).
- Suspension height can be adjusted without tools.
- Designed for continuous lighting systems, 90° angle connectors are also available for a flexible system design.
- With integrated power track profile to take supply voltage and DALI signal;
- Lights can be installed flexibly and without tools by magnetic holders and lock
- Either non dimmable, DALI or BLE Mesh(Default).

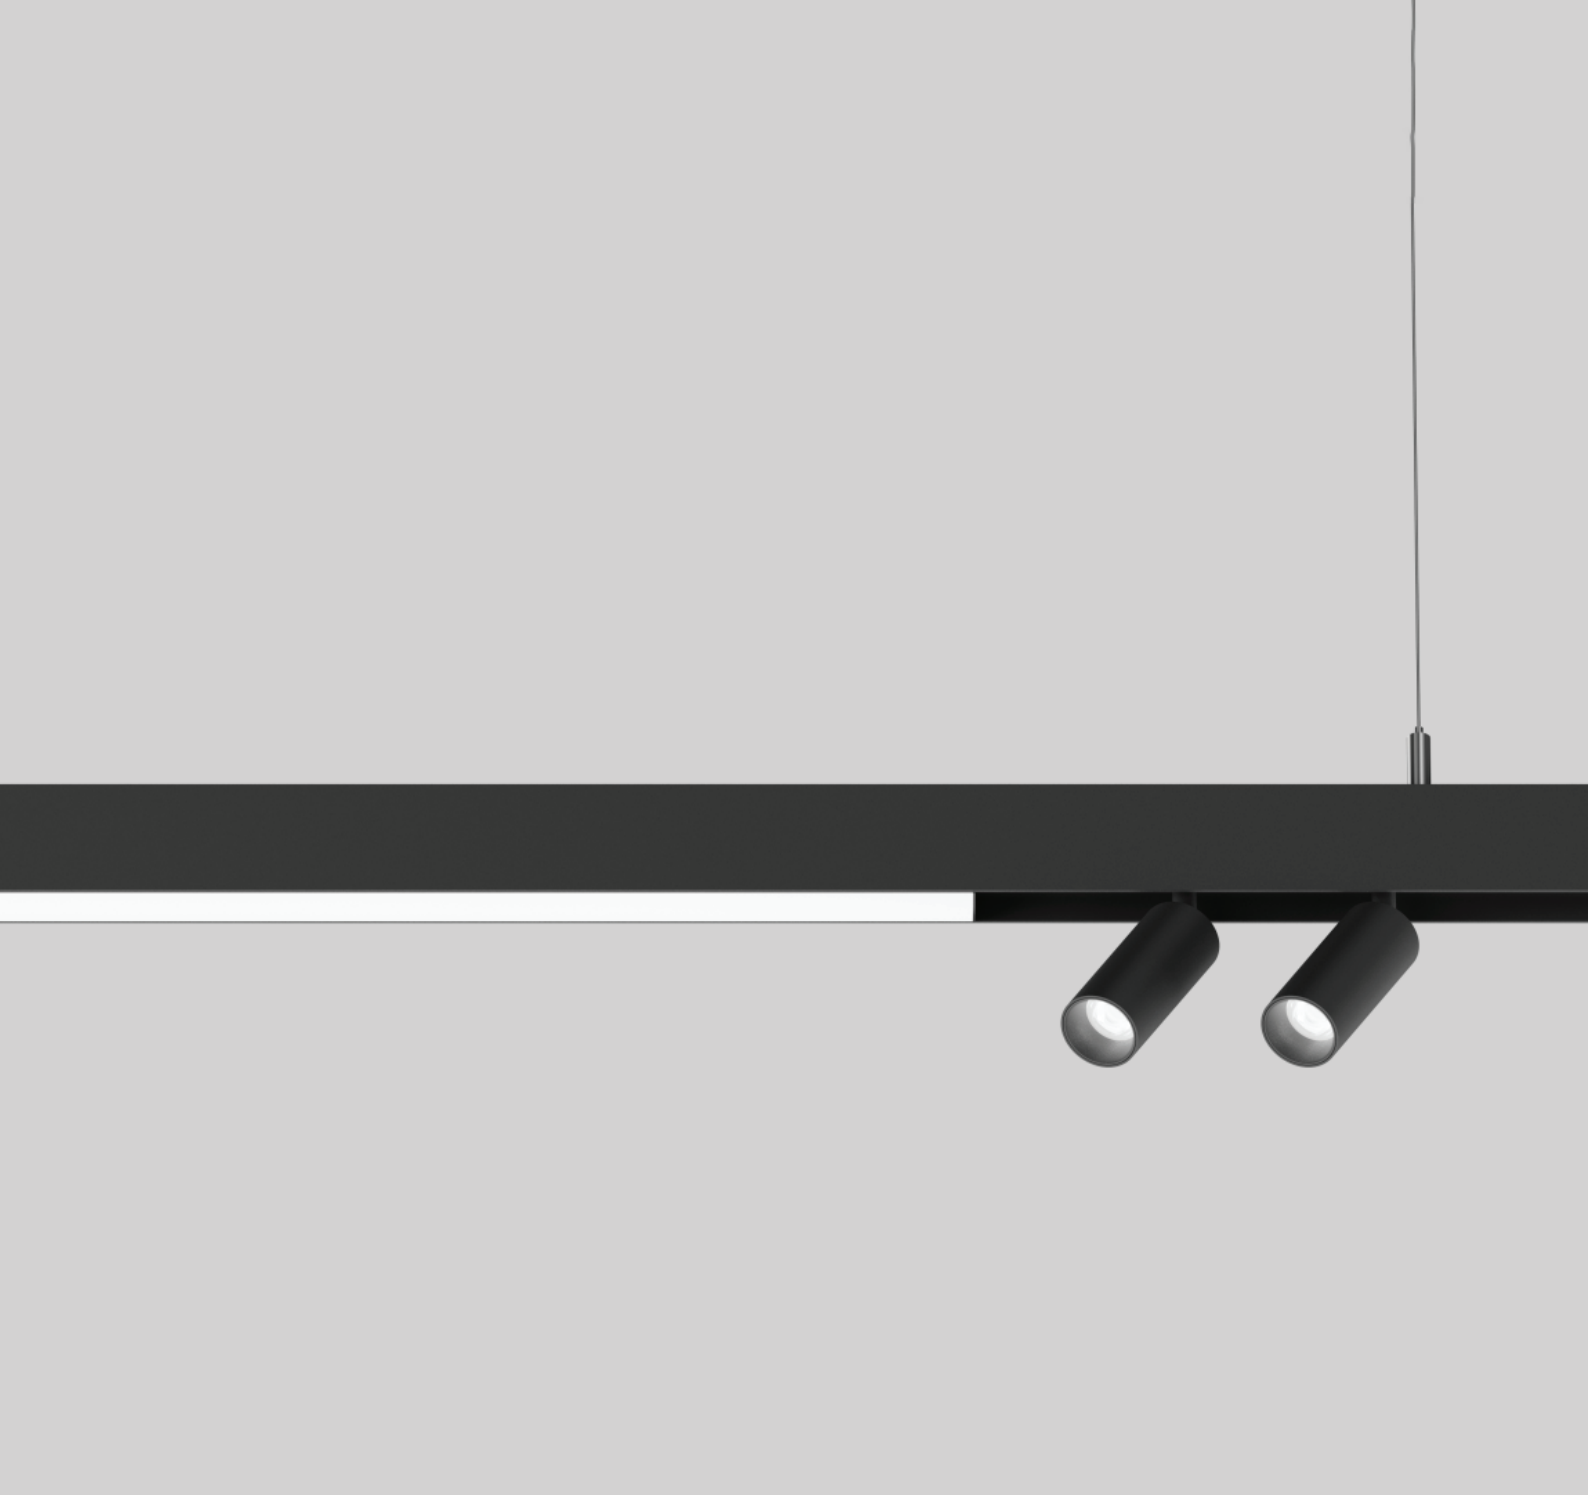



(mm)



Motion S surface/ suspended track

order track, light insets + mounting accessories separately


Material	Aluminum
Material colour	Black
IP level	IP20

TRACK


Order code	L(mm)	Description
KC-017M26A10-B	1000	1m motion S track
KC-017M26A20-B	2000	2m motion S track

CONNECTOR


Order code	Description
KC-017M26AV90-B	90° corner joiner for Motion S




KC-017M26AH90-B	90° corner joiner for Motion S
-----------------	--------------------------------



KC-017M26AE90-B	90° corner joiner for Motion S
-----------------	--------------------------------



KC-017M26L03-B	Linear flexible joiner
----------------	------------------------




KC-017M26L04-B	Straight joiner
----------------	-----------------




POWER FEEDER

Order code	Description
KC-017M26L02-B	Cable length 2000mm




END CAPS

Order code	Description
KC-017M26L05-B	End caps(pair)




SUSPENSION CABLE KIT

Order code	L(mm)	Description
KC-017M26L06-B	20	Ceiling fastener
	2000	cable susp.(use every 2000mm)
	35 x 22.5	canopy



Order code	Description
KC-017M26L07-B	driver box to install power supply



KC-017M26L08-B	driver box to install power supply
----------------	------------------------------------

