


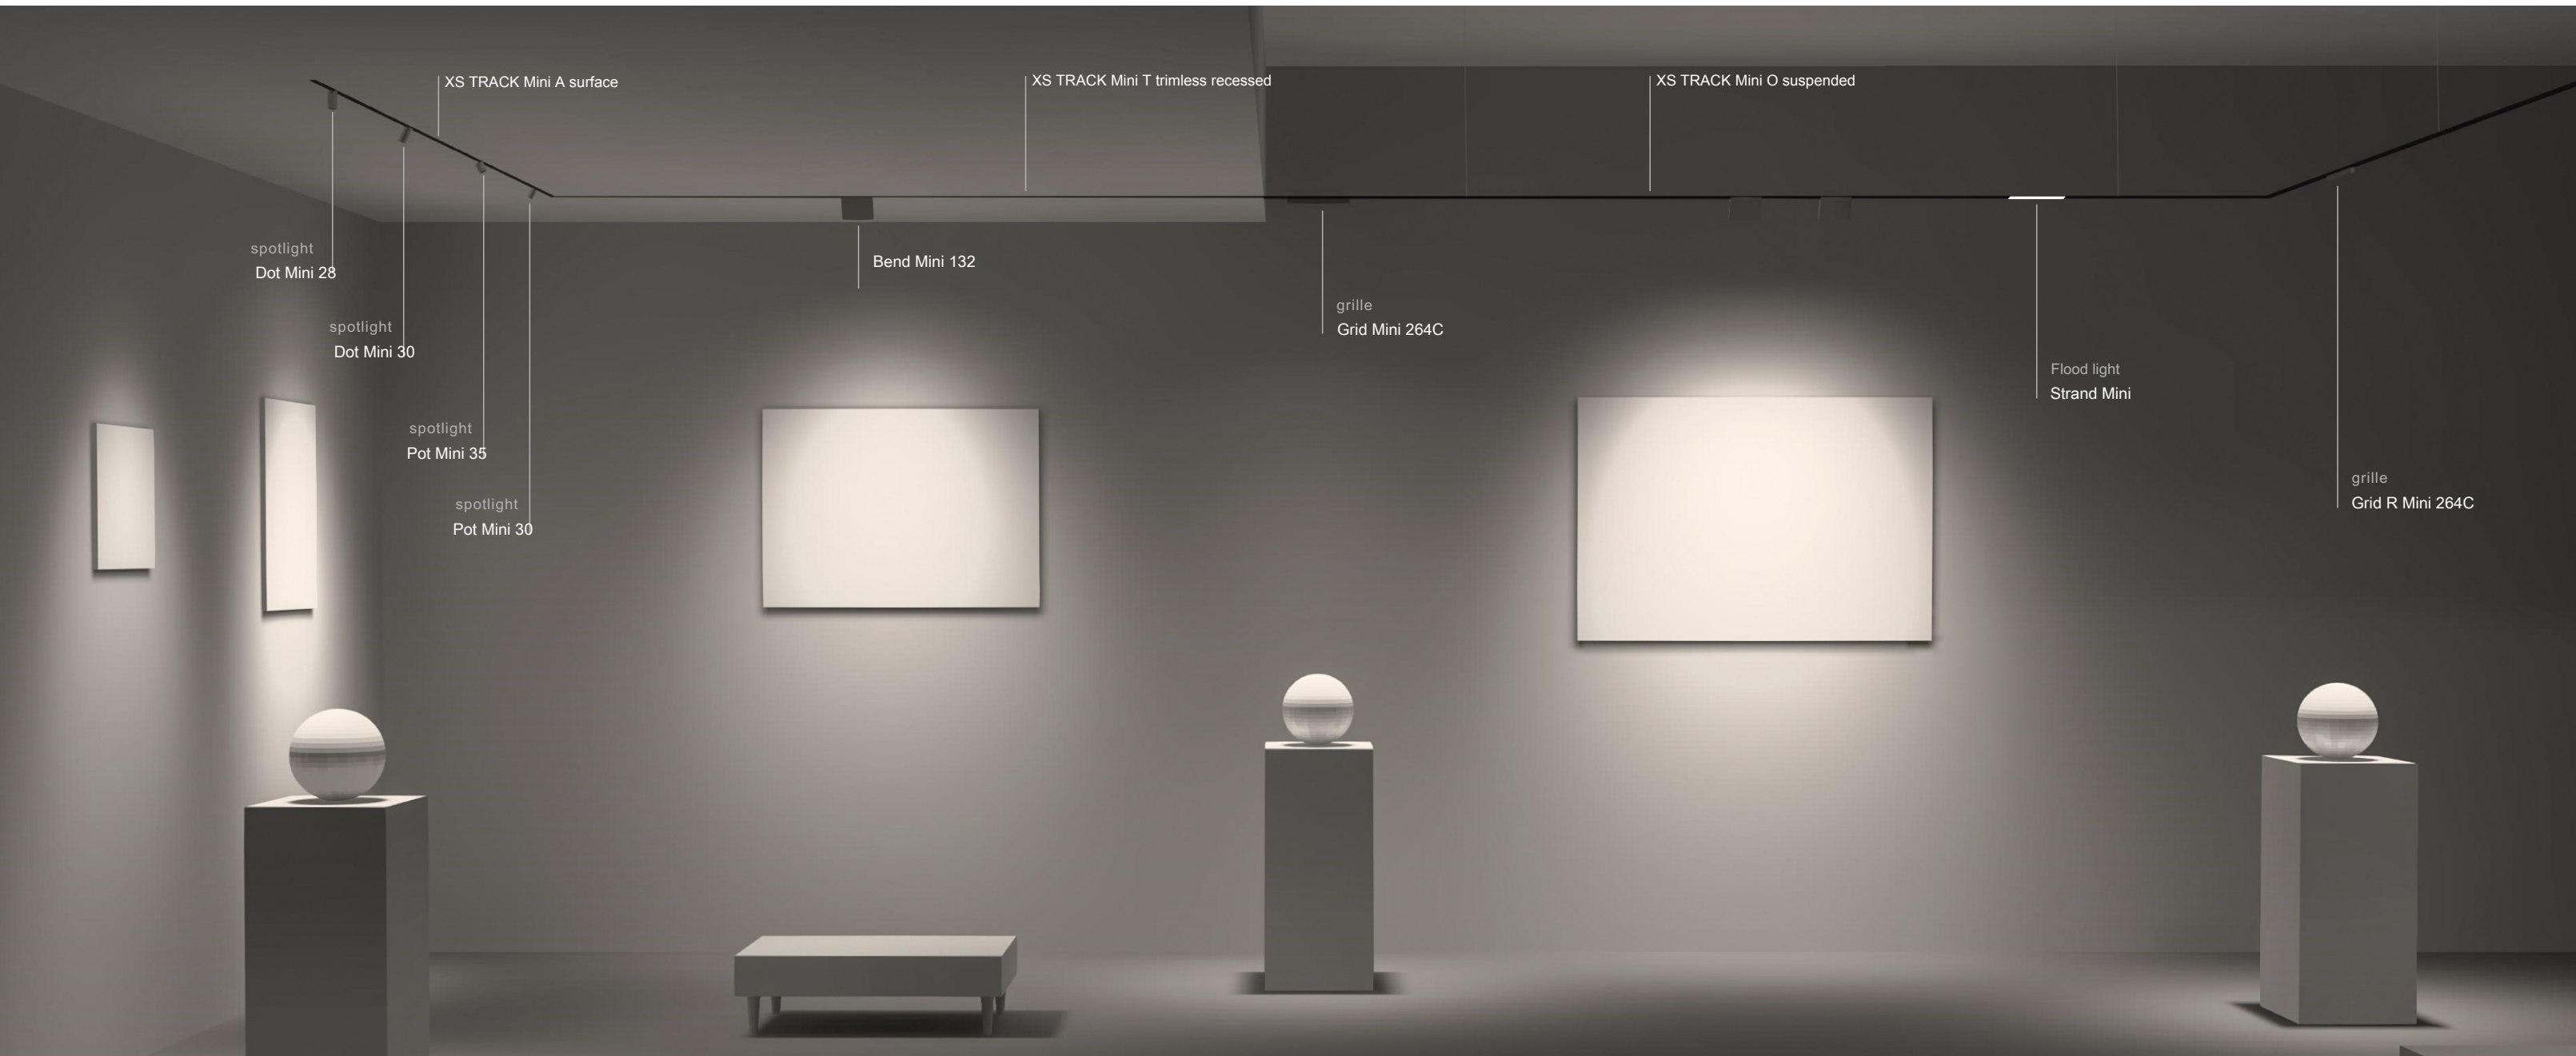

XS TRACK Mini A / Mini O / Mini T

Xs track is as easy to install as a surface system, but its looks like a trimless track due to its small size and its geometric simplicity.

PRODUCT RANGE

XS TRACK Mini A / MIni AC / Mini O / Mini T system

TYPE

XS TRACK Mini A



XS TRACK Mini AC



XS TRACK Mini O




XS TRACK Mini T




MOUNTING

SURFACE



SUSPENDED




TRIMLESS RECESSED



INSETS

Dot Mini 22



Dot Mini 28



Dot Mini 35




Dot Mini 30



Pot Mini 35



Pot Mini 30



Eyelet Mini



MARS MINI



Bend Mini 132



FOLD Mini 200



Grid Mini 264C



Grid R Mini 264C



Strand Mini





XS TRACK Mini A surface




48 V



SIZE(mm)
1000x19x10
2000x19x10
3000x19x10

PRODUCT NAME
Mini S Surface Track
Mini S Surface Track
Mini S Surface Track


ORDER CODE
KC-10.M19A10-B
KC-10.M19A20-B
KC-10.M19A30-B



110x19x10

Power Feeder with 2m Cable


KC-10.M19L010-B



150x11x7

Straight Power Joiner


KC-10.M19L020-B



86x86x7

L Shape Power Joiner


KC-10.M19L030-B



29x29x10

L Shape Physical Joiner - Horizontal


KC-10.M19L031-B



160x75x7

T Shape Power Joiner


KC-10.M19L040-B



39x29x10

T Shape Physical Joiner


KC-10.M19L041-B



160x160x7

X Shape Power Joiner


KC-10.M19L050-B



39x39x10

X Shape Physical Joiner


KC-10.M19L051-B



218x11x7

Flexible Power Joiner


KC-10.M19L060-B



26x26x19

L Shape Physical Joiner - Vertical

KC-10.M19L061-B



19x12x10

End caps

KC-10.M19L070-B

MATERIAL COLOUR | BK ■ |

MATERIAL |  AL |



XS TRACK Mini O suspended




48V



SIZE(mm)
1000x22x22
2000x22x22
3000x22x22

PRODUCT NAME
Mini O Suspended Track
Mini O Suspended Track
Mini O Suspended Track


ORDER CODE
KC-10.M19O10-B
KC-10.M19O20-B
KC-10.M19O30-B



150x11x7

Straight Power Joiner


KC-10.M19L020-B



86x86x7

L Shape Power Joiner


KC-10.M19L030-B



160x75x7

T Shape Power Joiner


KC-10.M19L040-B



160x160x7

X Shape Power Joiner

KC-10.M19L050-B



218x11x7

Flexible Power Joiner


KC-10.M19L060-B



2000x15

Mini O Suspension Kit

KC-10.M19L080-B



2000x15

Mini O Suspension Kit

KC-10.M19L090-B



22x22x12

End caps

KC-10.M19L10-B

MATERIAL COLOUR | BK ■ |


MATERIAL | AL |



XS TRACK Mini T trimless recessed




48V



SIZE(mm)
1000x40x11
2000x40x11
3000x40x11

PRODUCT NAME
Mini T Trimess Track
Mini T Trimess Track
Mini T Trimess Track


ORDER CODE
KC-10.M19T10-B
KC-10.M19T20-B
KC-10.M19T30-B



110x19x10

Power Feeder with 2m Cable


KC-10.M19L010-B



150x11x7

Straight Power Joiner


KC-10.M19L020-B



218x11x7

Flexible Power Joiner


KC-10.M19L060-B



40x40x10.8

L Shape Physical Joiner - Vertical


KC-10.M19TV90-B



86x86x7

L Shape Power Joiner


KC-10.M19L030-B



50x50x10.8

L Shape Physical Joiner - Horizontal


KC-10.M19TH90-B



160x75x7

T Shape Power Joiner


KC-10.M19L040-B



60x50x10.8

T Shape Physical Joiner


KC-10.M19TT90-B



160x160x7

X Shape Power Joiner

KC-10.M19L050-B



60x60x10.8

X Shape Physical Joiner

KC-10.M19TX90-B

MATERIAL COLOUR | BK ■ |

MATERIAL | AL |


YOUR PERFECT CURVED!

The XS TRACK offers many solutions to compose curved profiles, with 45° , 90° and 180° curved connectors,Individualized solutions can be evaluated on request.

CURVED TRACK Mini AC



48V




A CURVED TRACK
Ø400MM/90° R200
KC-10.M19AC0490




B CURVED TRACK
Ø600MM/90° R300
KC-10.M19AC0690




C CURVED TRACK
Ø800MM/45° R400
KC-10.M19AC0845





D CURVED TRACK
Ø1600MM/45° R800
KC-10.M19AC1645



E CURVED TRACK
Ø1600MM/90° R800
KC-10.M19AC1690



F CURVED TRACK
Ø1600MM/180° R800
KC-10.M19AC1618

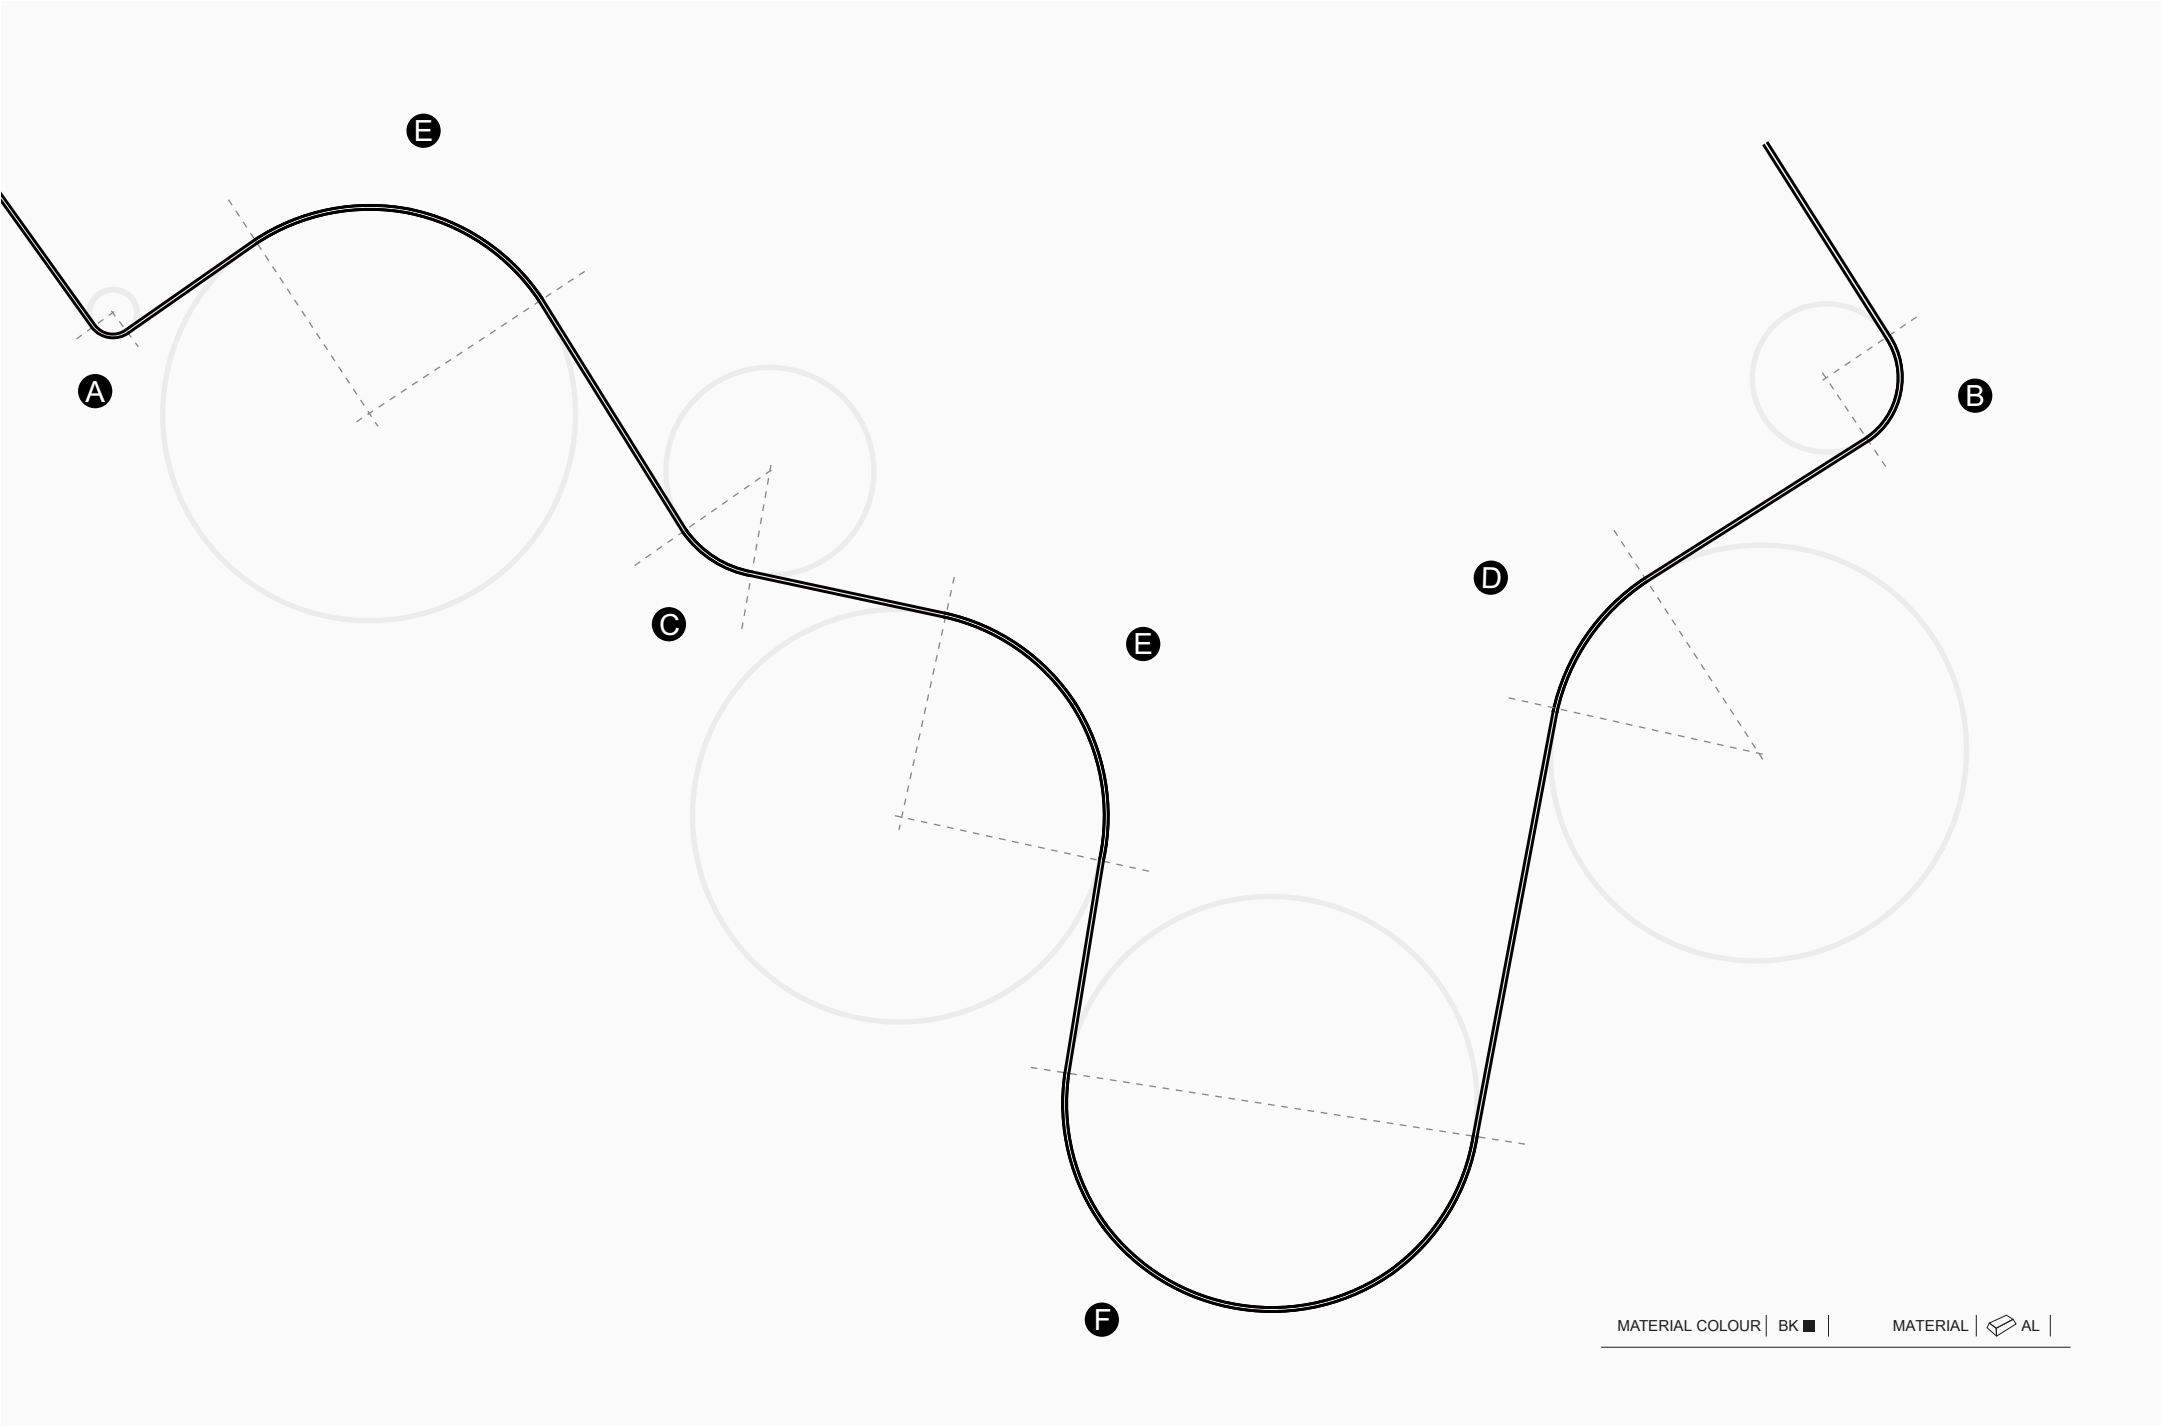

MATERIAL COLOUR | BK ■ |

MATERIAL | AL |

Dot Mini 22

XS track

It stands out for its mini but high performance for accent lighting, flexible choice for its colors and beam angles, structural design balances aesthetics and functionality.

XS TRACK Mini A / Mini O / Mini T

spotlight



Dot Mini 22	KC-10.001A01
Power	3W
Beam angle	16°/29°/34°
Color temperature	3000K/4000K/2700K-6000K
Light efficiency	72lm/W
Color rendering index	≥90
Operating temperature	-25~50℃
Rated life hours	35,000-50,000H LM80
LED chip	SMD

CECBTUV

III

IP20

DC48V

HOT PLUG SAFE

FLICKER FREE

Dot Mini 28	KC-10.002A01
Power	5.3W
Beam angle	15°/24°/36°/50°
Color temperature	3000K/4000K/2700K-6000K
Light efficiency	87lm/W
Color rendering index	≥90
Operating temperature	-25~50℃
Rated life hours	35,000-50,000H LM80
LED chip	COB

CECBTUV

III

IP20

DC48V

HOT PLUG SAFE

FLICKER FREE

Dot Mini 35	KC-10.012A01
Power	5.6W
Beam angle	15°/24°/36°/50°
Color temperature	3000K/4000K/2700K-6000K
Light efficiency	88lm/W
Color rendering index	≥90
Operating temperature	-25~50℃
Rated life hours	35,000-50,000H LM80
LED chip	COB

CECBTUV

III


IP20

DC48V

HOT PLUG SAFE

FLICKER FREE

OPTIONS
1 Non-DIM

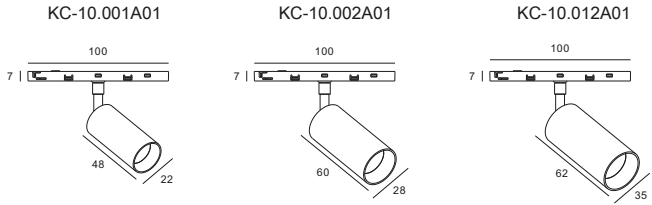

Dot Mini 30

XS track

Knurled ring on the projector, zoomable beam angles from 8° to 38°, excellent lighting solution for accent lighting, used for spaces in stores, galleries, residential, etc.



XS TRACK Mini A / Mini O / Mini T

spotlight



Dot Mini 30	KC-10.003A01	
	Power	5.3W
	Beam angle	18-31°
	Color temperature	3000K/4000K/2700K-6000K
	Light efficiency	36lm/W
	Color rendering index	≥90
	Operating temperature	-25~50℃
	Rated life hours	35,000-50,000H LM80
	LED chip	COB

CECBTUV




DC 48V

HOT PLUG SAFE

FLICKER FREE



OPTIONS	
1	Non-DIM



XS TRACK Mini A / Mini O / Mini T
spotlight




Pot Mini 35	KC-10.004A01	
	Power	4.5W
	Beam angle	15°/24°/36°/50°
	Color temperature	3000K/4000K/2700K-6000K
	Light efficiency	66lm/W
	Color rendering index	≥90
	Operating temperature	-25~50℃
	Rated life hours	35,000-50,000H LM80
	LED chip	COB

CECBTUV





OPTIONS	
1	Non-DIM



Pot Mini 35
XS track

A functional and attractive spotlight can satisfy different lighting requirements, with minimalistic and compact structure design.




COLOUR | BK ■ WH □ BG ■ WG ■

MATERIAL | AL

Pot Mini 30

XS track

The micro spotlight is specially designed for accent lighting, its mini structure allows it to be installed in a small space without being obtrusive.

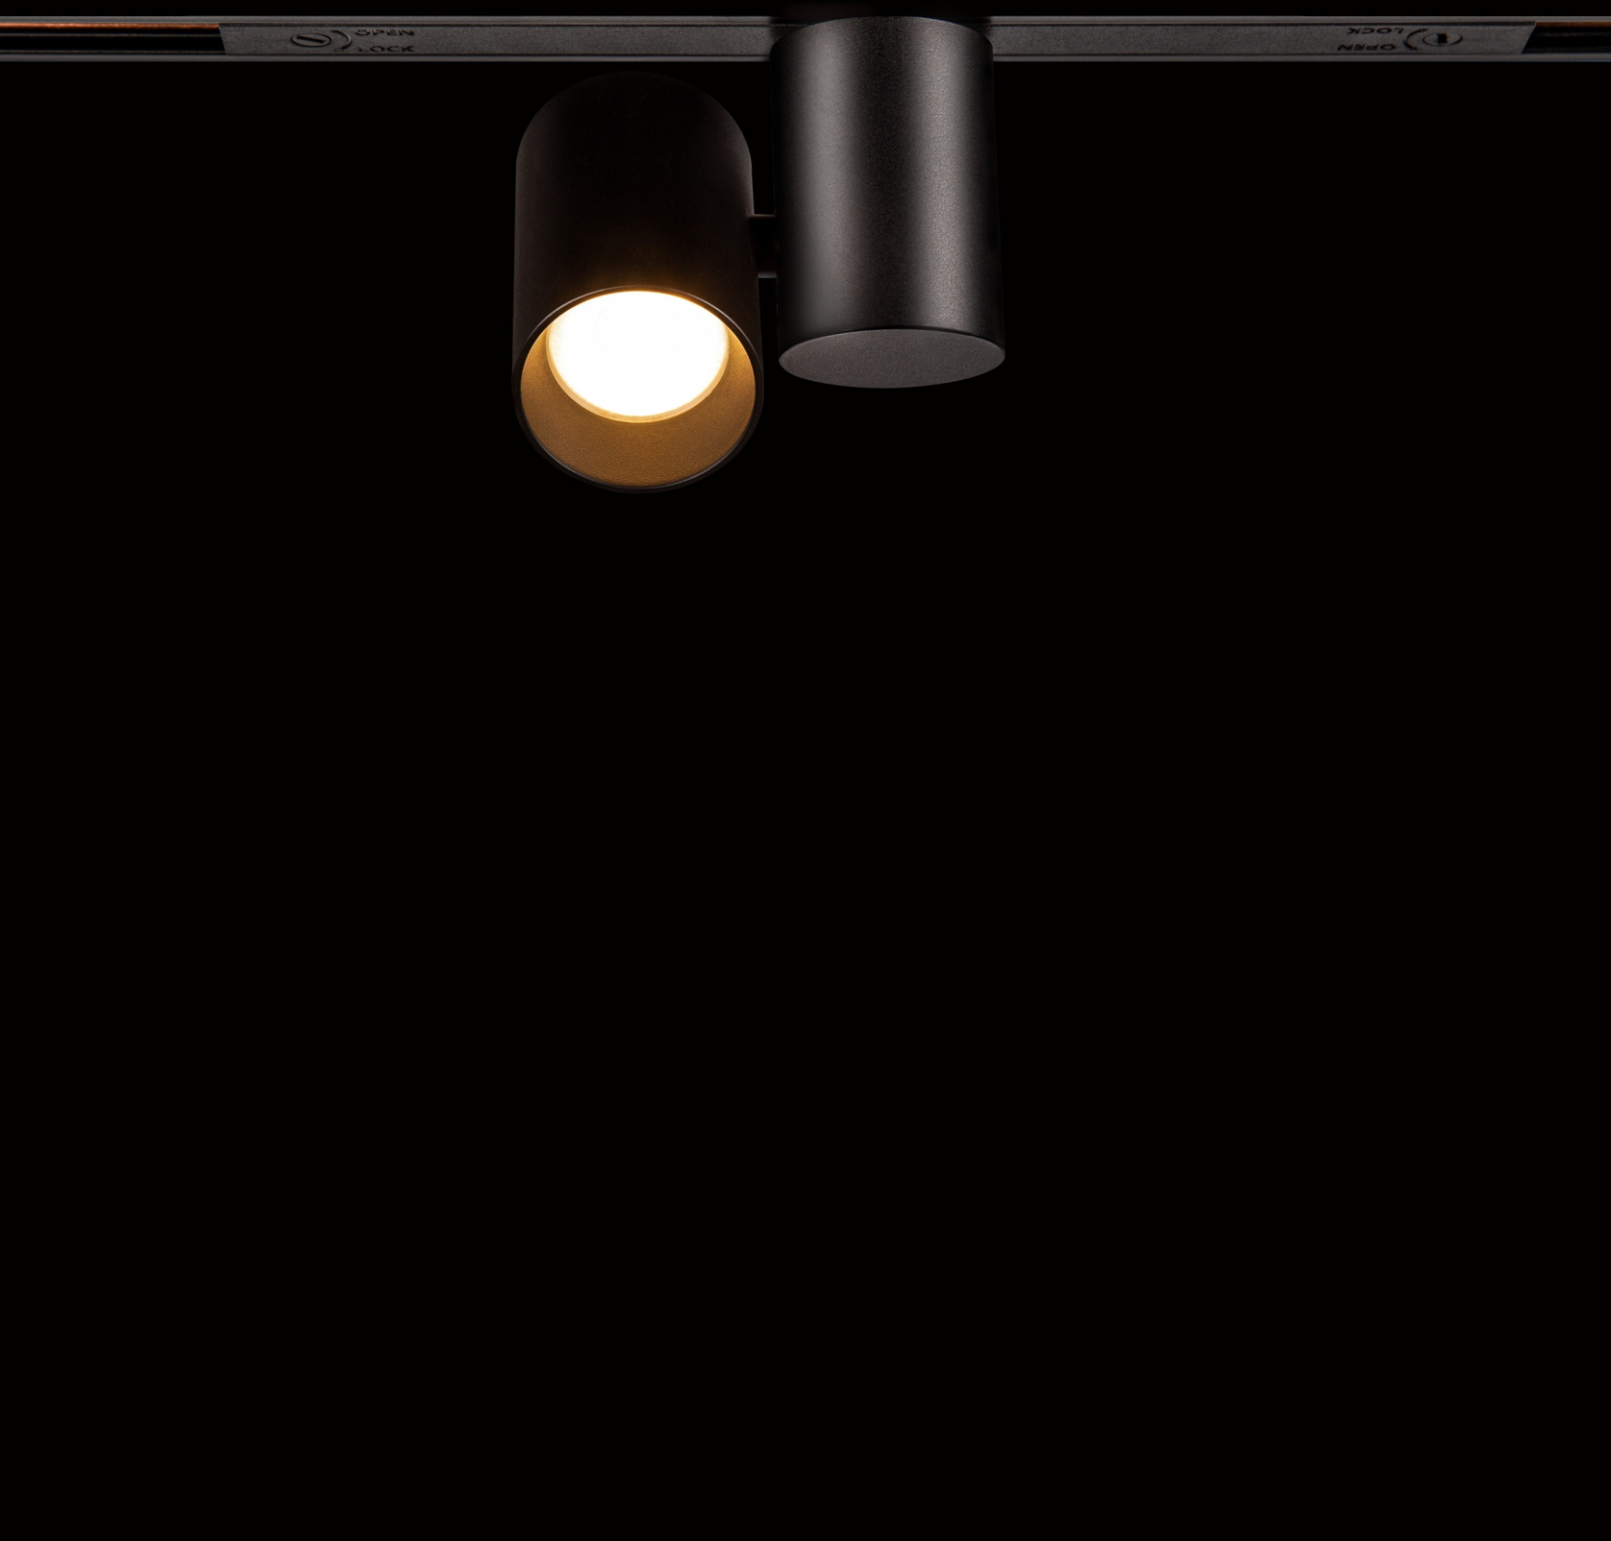

XS TRACK Mini A / Mini O / Mini T

spotlight



Pot Mini 30	KC-10.005A01
Power	5.3W
Beam angle	15°/24°/36°/50°
Color temperature	3000K/4000K/2700K-6000K
Light efficiency	87lm/W
Color rendering index	≥90
Operating temperature	-25~50℃
Rated life hours	35,000-50,000H LM80
LED chip	COB


CECBTUV

DC 48V

HOT PLUG SAFE

FLICKER FREE

OPTIONS	
1	Non-DIM



COLOUR | BK ■ WH □ BG ■ WG ■

MATERIAL | AL

XS TRACK Mini A / Mini O / Mini T
spotlight



Eyelet Mini	KC-10.006A01	
	Power	5.6W
	Beam angle	19°/26°/38°/58°
	Color temperature	3000K/4000K/2700K-6000K
	Light efficiency	88lm/W
	Color rendering index	≥90
	Operating temperature	-25~50℃
	Rated life hours	35,000-50,000H LM80
	LED chip	COB


CECBTUV

DC 48V

HOT PLUG SAFE

FLICKER FREE


OPTIONS	
1	Non-DIM



Eyelet Mini
XS track

It stands out for its mini but high performance for accent lighting, flexible choice for its colors and beam angles, structural design balances aesthetics and functionality.

XS TRACK Mini A / Mini O / Mini T
spotlight

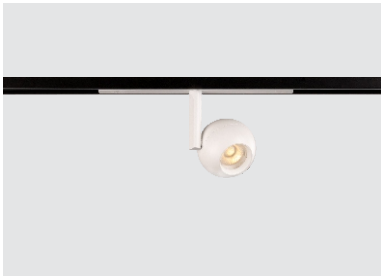

MARS Mini	KC-10.013A01	
	Power	5.6W
	Beam angle	21°/26°/38°/52°
	Color temperature	3000K/4000K/2700K-6000K
	Light efficiency	88lm/W
	Color rendering index	≥90
	Operating temperature	-25~50℃
	Rated life hours	35,000-50,000H LM80
	LED chip	COB


CECBTUV

DC 48V

HOT PLUG SAFE

FLICKER FREE

OPTIONS	
1	Non-DIM



MARS MINI
XS track

The product breaks the traditional concept, the lamp head can flexibly adjust the irradiation angle, and automatically and easily rotate to achieve the ideal lighting effect.

COLOUR | BK ■ WH □ BG ■ WG ■

MATERIAL | AL |

XS TRACK Mini A / Mini O / Mini T
spotlight

Bend Mini 132	KC-10.007A09	
	Power	8.5W
	Beam angle	20°/25°/38°/60°
	Color temperature	3000K/4000K/2700K-6000K
	Light efficiency	73lm/W
	Color rendering index	≥90
	Operating temperature	-25~50℃
	Rated life hours	35,000-50,000H LM80
	LED chip	COB

CECBTUV








DC 48V

HOT PLUG SAFE

FLICKER FREE



OPTIONS	
1	Non-DIM



COLOUR | BK ■ WH □ BG ■ WG ■

MATERIAL |  AL

Bend Mini 132
XS track

Adjustable and folded mini grille light, which can be flexibly used in the spaces for accent lighting, pursuing visual comfort while keeping high lighting performance.



365° ROTATION | 90° TILTING

ARCHILIGHT

XS TRACK Mini A / Mini O / Mini T
spotlight



FOLD Mini 200	KC-10.011A12	
	Power	12W
	Beam angle	13°/15°/23°/30°/42°
	Color temperature	3000K/4000K/2700K-6000K
	Light efficiency	65lm/W
	Color rendering index	≥90
	Operating temperature	-25~50℃
	Rated life hours	35,000-50,000H LM80
	LED chip	SMD


CECBTUV

DC 48V

HOT PLUG SAFE

FLICKER FREE

OPTIONS	
1	Non-DIM



Fold Mini 200
XS track

The product breaks the traditional concept, the lamp head can flexibly adjust the irradiation angle, and automatically and easily rotate to achieve the ideal lighting effect.

COLOUR | BK ■ WH □ BG ■ WG ■

MATERIAL | AL |

Grid R Mini 264C

XS track



The arc-shaped lamp body design makes it look softer and less tough, the mini grille light can be widely used for many different spaces with excellent anti-glare effects, such as stores, offices, etc.

ARCHILIGHT

XS TRACK Mini A / Mini O / Mini T


spotlight



Grid Mini 264C		KC-10.008A18
	Power	8.5W
	Beam angle	20°/25°/38°/60°
	Color temperature	3000K/4000K/2700K-6000K
	Light efficiency	79lm/W
	Color rendering index	≥90
	Operating temperature	-25~50℃
	Rated life hours	35,000-50,000H LM80
	LED chip	COB
         		

Grid R Mini 264C		KC-10.009A18
	Power	8.5W
	Beam angle	20°/25°/38°/60°
	Color temperature	3000K/4000K/2700K-6000K
	Light efficiency	79lm/W
	Color rendering index	≥90
	Operating temperature	-25~50℃
	Rated life hours	35,000-50,000H LM80
	LED chip	COB
         		

OPTIONS	
1	Non-DIM

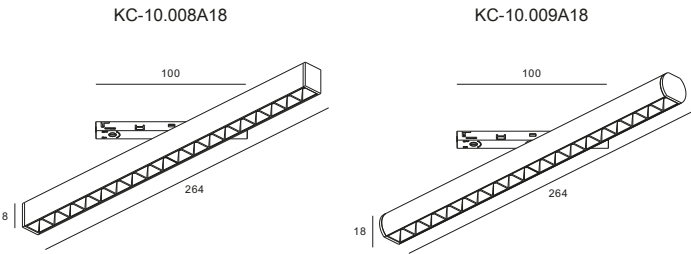

COLOUR | BK  WH  BG  WG  | MATERIAL |  AL |

XS TRACK Mini A / Mini O / Mini T
spotlight



Strand Mini	KC-10.010A03	
	Power	6W
	Beam angle	110°
	Color temperature	3000K/4000K/2700K-6000K
	Light efficiency	79lm/W
	Color rendering index	≥90
	Operating temperature	-25~50℃
	Rated life hours	35,000-50,000H LM80
	LED chip	SMD
CECBTUV  DC 48V HOT PLUG SAFE FLICKER FREE 		




Strand Mini	KC-10.010A06	
	Power	12W
	Beam angle	110°
	Color temperature	3000K/4000K/2700K-6000K
	Light efficiency	80lm/W
	Color rendering index	≥90
	Operating temperature	-25~50℃
	Rated life hours	35,000-50,000H LM80
	LED chip	SMD
CECBTUV  DC 48V HOT PLUG SAFE FLICKER FREE 		

Strand Mini	KC-10.010A012	
	Power	24W
	Beam angle	110°
	Color temperature	3000K/4000K/2700K-6000K
	Light efficiency	83lm/W
	Color rendering index	≥90
	Operating temperature	-25~50℃
	Rated life hours	35,000-50,000H LM80
	LED chip	SMD
CECBTUV  DC 48V HOT PLUG SAFE FLICKER FREE 		

Strand Mini
XS track

The very thin linear luminary with diffused light that stands out for its small dimensions and discretion.

OPTIONS	
1	Non-DIM

		
COLOUR BK  WH  BG  WG  MATERIAL  AL		