

222 COMPACT SPLICING CONNECTOR, 3 PORT 2 WAY, WATERPROOF, WITH LEVER

DESCRIPTION

This 2 Port 3 Way connector is designed for secure, waterproof connections, featuring intuitive levers for easy wire installation, a durable PA66 housing, and brass metal parts.




MODLE

PP-222-3P-1

Housing	PA66
Metal Part	Copper
Waterproof O-Ring Material	Silicon
Europe Standard	450V 16A
USA Standard	300V 20A
China Standard	450V 32A
Cable Range	20-12 AWG
Operating Temperature	-40°F to +185°F (-40°C to +85°C)

Dimension

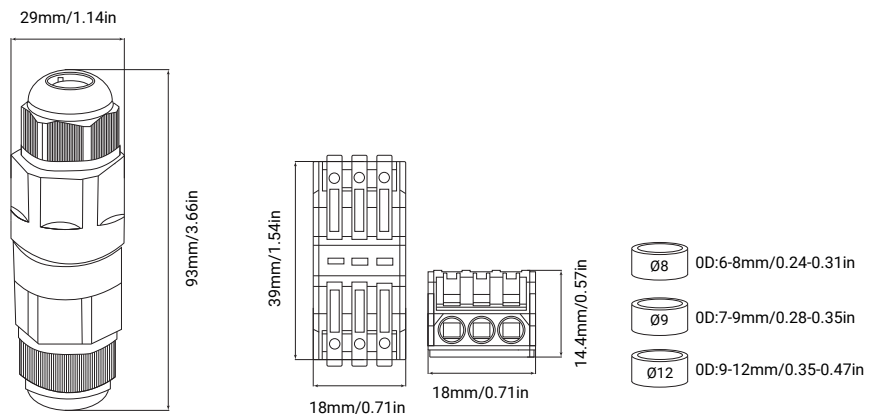

MORE INFORMATION

For more information, please contact us at (888) 228-9138, email contact@powersupplymall.com, or visit our website at www.powersupplymall.com.