
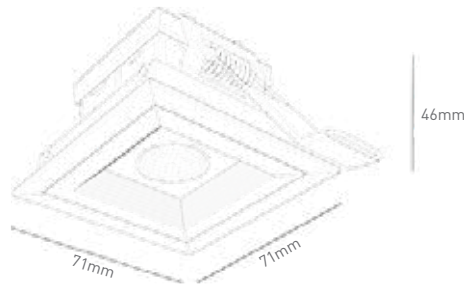


Micro MD 1xMD55/840




BUCK

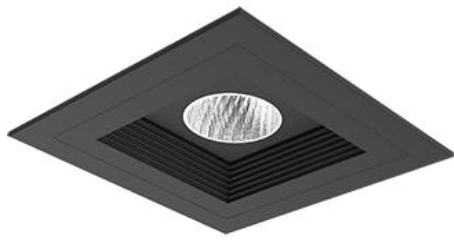

Model No.*	Lamp	Weight	Flux(lm)*	Power	CCT	CRI	UGR	LED Service life	Warranty
BK-1515112 □□-DL	1x MD55 /840	0.2kg	196lm	2W	4000k	>80	<19	approx.50000hrs	5 years

*□□ White body/ □□ Gery body/ □□ Black body

*Luminaire luminous flux and connected electrical load - initial tolerance of $\pm 10\%$ (at ambient temperature of 25°C)

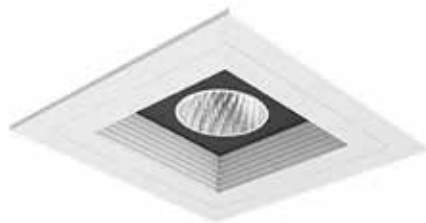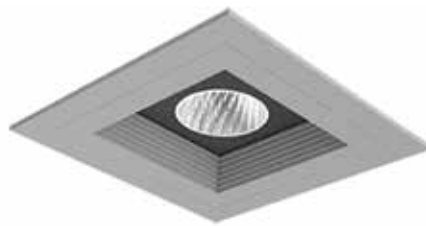


GENERAL Minimal dimensions and supreme visual comfort together with high optical and energy efficiency make this recessed linear downlighter suitable for direct illumination of office spaces, communication and reception area, especially with high ceilings.

OPTICS Linear multispot downlighter reflectors with complex surfaces geometry of micro facets allow precise shaping of light beam. Angles of direct light beam and light reflected from reflector are almost perfectly aligned, providing sharp cut off for full visual comfort.


HOUSING The choice of appropriate control gear enables integration into lighting management systems, including dynamic white function.

EQUIPMENT Housing is made of aluminium with visible frame. Finish: epoxy polyester powder coating. Fine structured texture. Other colours available upon request.

ADDITIONAL Applicable to all types of suspended ceilings that can be cut through.



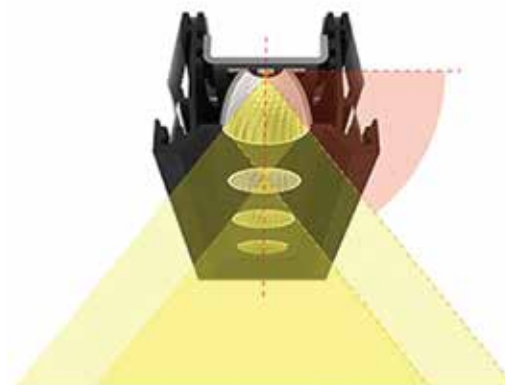


MD 55



Micro MD 2x2MD55/840



BUCK

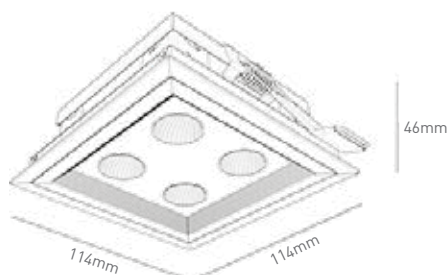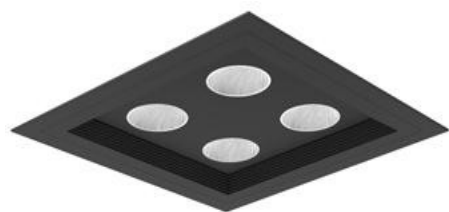

Model No.*	Lamp	Weight	Flux(lm)*	Power	CCT	CRI	UGR	LED Service life	Warranty
BK-1515142 □□-DL	2x2 MD55 /840	0.4kg	785lm	9W	4000k	>80	<16	approx.50000hrs	5 years

*□□ White body/ □□ Gery body/ □□ Black body

*Luminaire luminous flux and connected electrical load - initial tolerance of $\pm 10\%$ (at ambient temperature of 25°C)

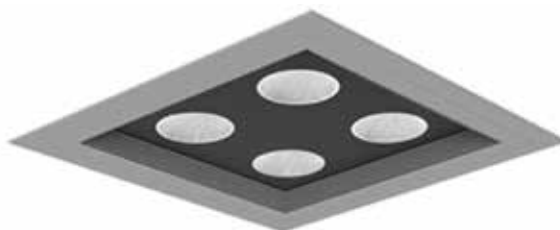



GENERAL Minimal dimensions and supreme visual comfort together with high optical and energy efficiency make this recessed linear downlighter suitable for direct illumination of office spaces, communication and reception area, especially with high ceilings.

OPTICS Linear multispot downlighter reflectors with complex surfaces geometry of micro facets allow precise shaping of light beam. Angles of direct light beam and light reflected from reflector are almost perfectly aligned, providing sharp cut off for full visual comfort.


HOUSING The choice of appropriate control gear enables integration into lighting management systems, including dynamic white function.

EQUIPMENT Housing is made of aluminium with visible frame. Finish: epoxy polyester powder coating. Fine structured texture. Other colours available upon request.

ADDITIONAL Applicable to all types of suspended ceilings that can be cut through.

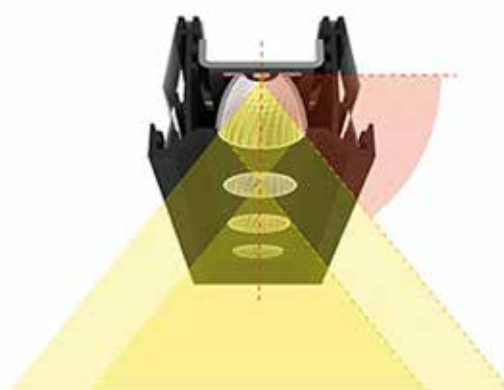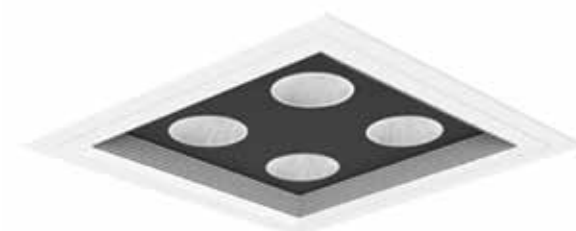



MD 55



MICRO DOWNLIGHT REFLECTOR

Micro MD 4xMD55/840



BUCK

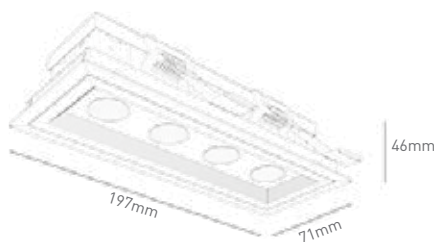

Model No.*	Lamp	Weight	Flux(lm)*	Power	CCT	CRI	UGR	LED Service life	Warranty
BK-1515152 □□-DL	4x MD55 /840	0.4kg	785lm	9W	4000k	>80	<16	approx.50000hrs	5 years

*□□ White body/ □□ Gery body/ □□ Black body

*Luminaire luminous flux and connected electrical load - initial tolerance of $\pm 10\%$ (at ambient temperature of 25°C)

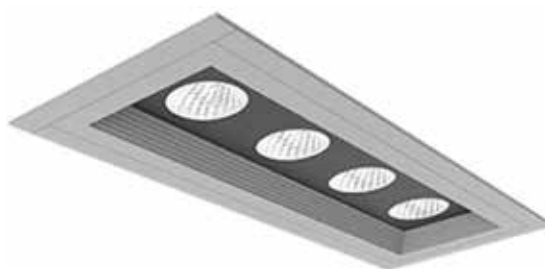



GENERAL Minimal dimensions and supreme visual comfort together with high optical and energy efficiency make this recessed linear downlighter suitable for direct illumination of office spaces, communication and reception area, especially with high ceilings.

OPTICS Linear multispot downlighter reflectors with complex surfaces geometry of micro facets allow precise shaping of light beam. Angles of direct light beam and light reflected from reflector are almost perfectly aligned, providing sharp cut off for full visual comfort.

HOUSING The choice of appropriate control gear enables integration into lighting management systems, including dynamic white function.

EQUIPMENT Housing is made of aluminium with visible frame. Finish: epoxy polyester powder coating. Fine structured texture. Other colours available upon request.

ADDITIONAL Applicable to all types of suspended ceilings that can be cut through.

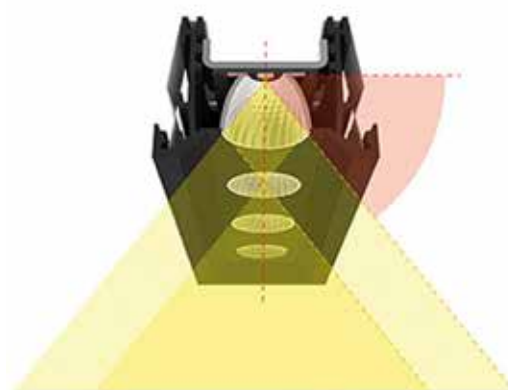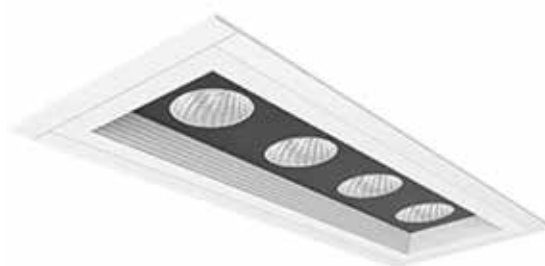

MD 55

