TEST REPORT: MPM-30-24

30W High Reliable Green Medical Encapsulated Type

■ DESIGN VERIFY TEST

- Output Function Test
- Input Function Test
- Protection Function Test
- Control Function Test
- Component Stress Test

■ SAFETY & E.M.C. TEST

- Safety Test
- E.M.C. Test

■ RELIABILITY TEST

- ENVIRONMENT TEST

DESIGN VERIFY TEST

OUTPUT FUNCTION

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OUTPUT VOLTAGE TOLERANCE (Max)	V1 : 2.0% ~ -2.0%	I/P : 80VAC / 264VAC O/P: FULL / MINLOAD TA= 25℃	V1: 0.58% ~ -0.54%
2	LINE REGULATION (MAX.)	V1 : 0.5% ~ -0.5%	I/P : 80VAC / 264VAC O/P: FULL LOAD TA : 25℃	V1: 0.00% ~ 0.00%
3	LOAD REGULATION(MAX.)	V1 : 0.5% ~ -0.5%	I/P : 230VAC O/P: MIN LOAD ~ FULL LOAD TA : 25℃	V1: 0.00% ~ -0.04%
4	OVER/UNDERSHOOT TEST	< ±5%	I/P : 230VAC O/P: FULL LOAD TA : 25℃	TEST< 1.7 %
5	RIPPLE & NOISE(Max)	V1 : 200 mVp-p	I/P : 230VAC O/P: FULL LOAD TA : 25℃	V1 : 39.4 mVp-p

high frequency:

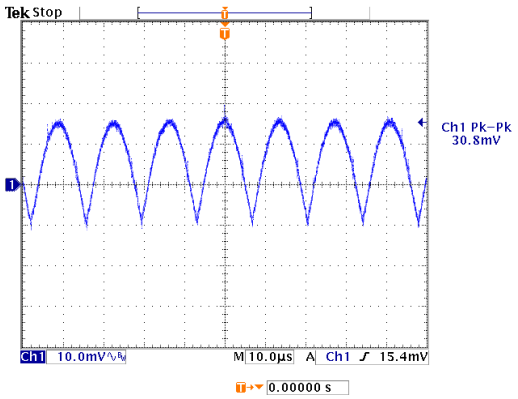

low frequency:

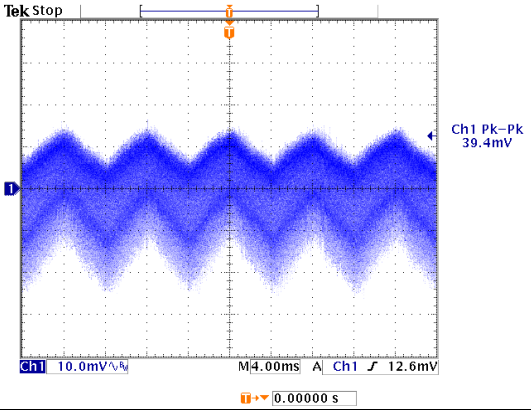

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
6	SET UP TIME (MAX.)	230VAC : 500ms 115VAC : 500ms	I/P : 230VAC I/P : 115VAC O/P: FULL LOAD TA : 25℃	230VAC : 80ms 115VAC : 66ms

INPUT=230VAC/50HZ @ FULL LOAD

CH1 : Output Voltage CH2 : AC Input Voltage

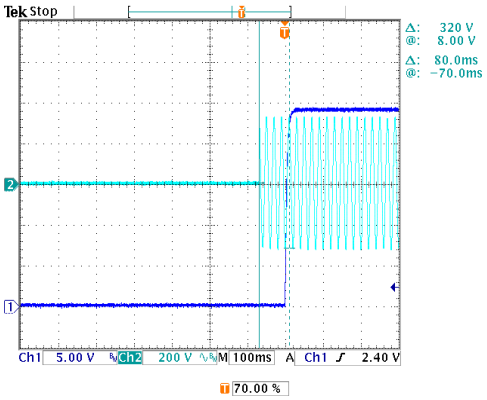

INPUT=115VAC/60HZ @ FULL LOAD

CH1 : Output Voltage CH2 : AC Input Voltage

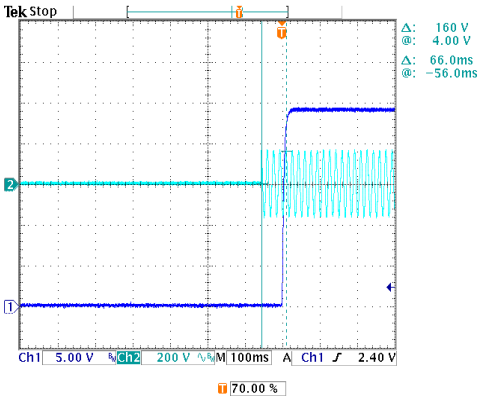

7	RISE TIME (MAX.)	230VAC : 30ms 115VAC : 30ms	I/P : 230VAC I/P : 115VAC O/P: FULL LOAD TA : 25℃	230VAC : 9.2ms 115VAC : 8.8ms

INPUT=230VAC/50HZ @ FULL LOAD

CH1 : Output Voltage

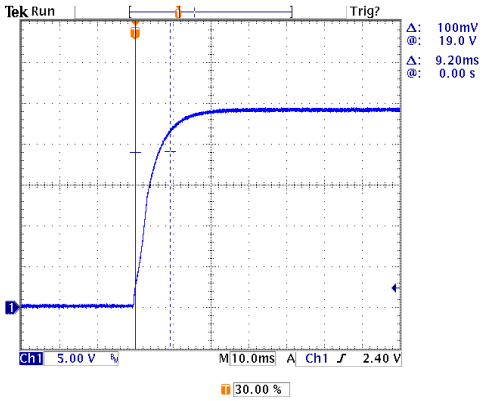

INPUT=115VAC/60HZ @ FULL LOAD

CH1 : Output Voltage

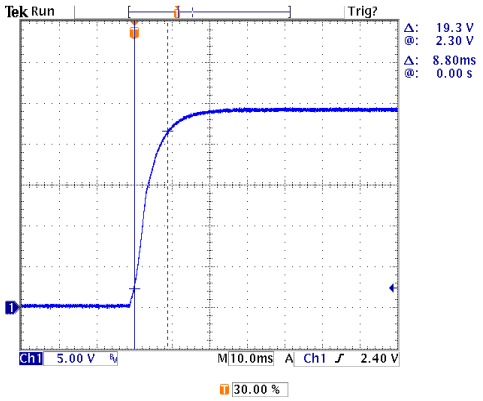

8	HOLD UP TIME (TYP.)	230VAC : 40ms 115VAC : 12ms	I/P : 230VAC I/P : 115VAC O/P: FULL LOAD TA : 25℃	230VAC : 80.0ms 115VAC : 18.0ms

INPUT=230VAC/50HZ @ FULL LOAD

CH1 : Output Voltage CH2 : AC Input Voltage

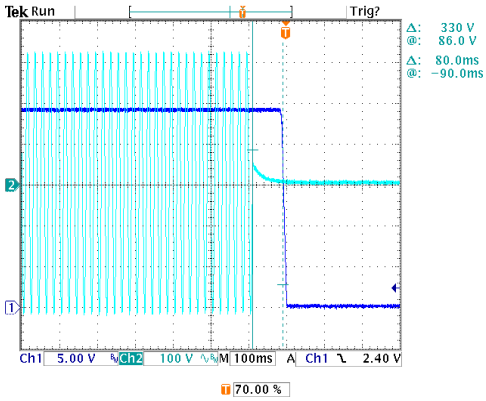

INPUT=115VAC/60HZ @ FULL LOAD

CH1 : Output Voltage CH2 : AC Input Voltage

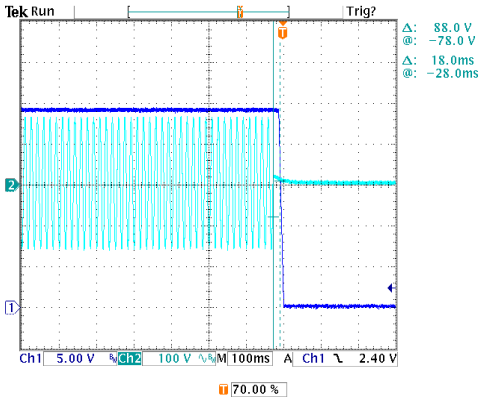

9	DYNAMIC LOAD	V1 : 2400 mVp-p	I/P : 230VAC O/P: (1)Full/Min load 50%duty/120HZ (2)Full/Min load 50%duty/1KHZ TA : 25℃	(1). (2). unit:mVp-p V1: 350mv 298mv

FULL /MIN LOAD 50%DUTY / 120HZ

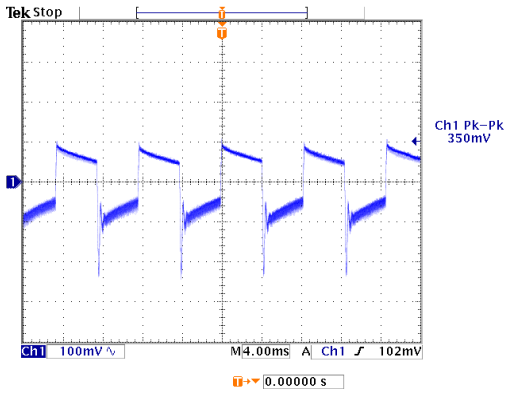

FULL /MIN% LOAD 50%DUTY / 1KHZ

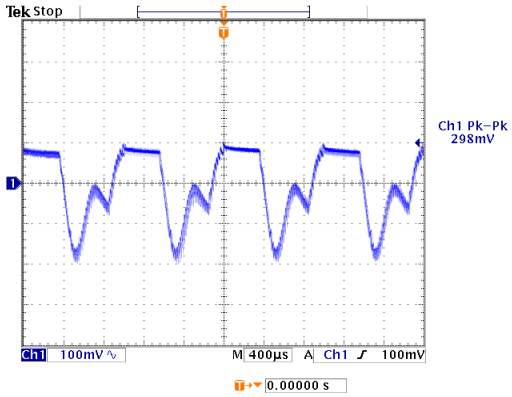

INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	80VAC ~ 264VAC	I/P : TESTING O/P : FULL LOAD Ta : 25℃	72.0VAC ~ 264VAC
			I/P : LOW-LINE = 97VAC HIGH-LINE = 300VAC O/P : FULL/MIN LOAD ON:30 Sec ; OFF:30 Sec 10MIN (POWER ON/OFF NO DAMAGE)	TEST : OK
2	INPUT FREQUENCY RANGE	47HZ ~ 63HZ NO DAMAGE	I/P : 80VAC ~ 264VAC O/P : FULL~MIN LOAD Ta : 25℃	TEST : OK
3	INPUT CURRENT (TYP.)	0.50A / 230VAC 0.75A / 115VAC	I/P : 230VAC I/P : 115VAC O/P: FULL LOAD TA : 25℃	I= 0.33A / 230VAC I= 0.53A / 115VAC
4	LEAKAGE CURRENT	< 80.00μA	I/P : 264VAC O/P: MIN LOAD TA : 25℃	48.2 μA
5	NO LOAD POWER CONSUMPTION	< 0.075W	I/P : 230VAC O/P: MIN LOAD TA : 25℃	< 0.0545 W
6	EFFICIENCY (TYP.)	90.0%	I/P : 230VAC O/P: FULL LOAD TA : 25℃	90.68 %

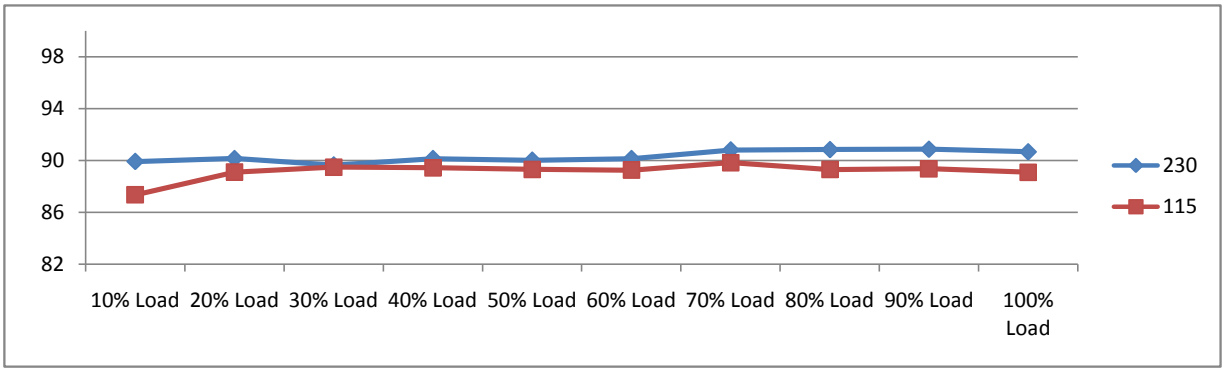

7	INRUSH CURRENT (TYP.)	45A / 230VAC 25A / 115VAC twidth= 555 us measured at 50% Ipeak COLD START	I/P : 230VAC I/P : 115VAC O/P: FULL LOAD TA : 25℃	I= 37.6A / 230VAC I= 17.0A / 115VAC T50= 420.0us / 230VAC

INPUT=230VAC/50HZ @ FULL LOAD

CH2 : AC Input Voltage CH4 : Input current

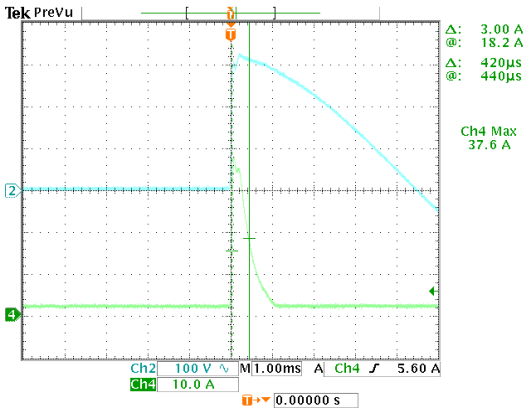

INPUT=115VAC/50HZ @ FULL LOAD

CH2 : AC Input Voltage CH4 : Input current

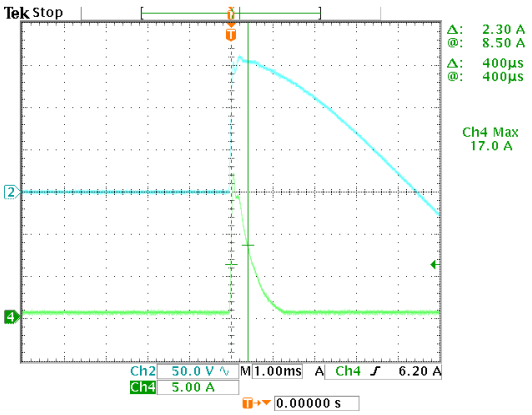

PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER LOAD PROTECTION	115% ~ 165%	I/P: 264VAC I/P: 230VAC I/P: 100VAC O/P: TESTING TA : 25℃	148.25% 264VAC 149.49% 230VAC 147.00% 100VAC Hiccup Mode
2	OVER VOLTAGE PROTECTION	25.20V ~ 32.40V	I/P: 264VAC I/P: 230VAC I/P: 80VAC O/P: MIN LOAD TA : 25℃	29.70V 264VAC 29.70V 230VAC 30.00V 80VAC Shut down Re- power ON
3	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 264VAC I/P: 80VAC O/P: FULL LOAD Ta: 25℃	NO DAMAGE Hiccup Mode

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Power Transistor	Q1 Rated : 600V 7.5A	I/P : 267VAC VDS : O/P : (1)Full Load Turn on (2) Output Short (3)Fulll load continue Ta : 25℃	VIN: 267VAC VDS: (1). 510.00V (2). 523.00V (3). 496.00V
2	O/P MOSFET	Q100 Rated : 200V 20.0A Rated : 200V	I/P : 267VAC VDS : O/P : (1)Full Load Turn on (2) Output Short (3)Fulll load continue Ta : 25℃	Q100 VDS : (1). 176.00V (2). 177.00V (3). 179.00V
3	Input Capacitor	C5 Rated : 56uf 400V	I/P : 267VAC O/P : (1)Full Load Turn on /Off (2)Min load Turn on /Off (3)Full Load /Min load Change (4)Full Load Continue Ta : 25℃	(1). 368.00V (2). 372.00V (3). 372.00V (4). 368.00V
4	Control IC	U1 Rated : 28V (max) -0.3 (min)	I/P : 267VAC O/P : (1)Full Load (2)Output Short (3)O.L.P (4)O.V.P (5)Low Line No Load Vo(min) Ta : 25℃	U1 (1). 19.20V (2). 12.60V (3). 19.30V (4). 22.50V (5). 17.70V
5	Clamp Diode	D5 Rated : 1000V 1.0A	I/P : 267VAC O/P : (1)Dynamic Load Full/Min Load (2)Fulll load continue Ta : 25℃	(1). 474.00V (2). 472.00V

SAFETY & E.M.C. TEST

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P : 4.000KVAC /min	I/P-O/P: 4.250KVAC /min Ta : 25℃	I/P-O/P: 1.03mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P : 500VDC>100MΩ	I/P-O/P: 500VDC Ta : 25℃/70%RH	I/P-O/P: 9999.0MΩ NO DAMAGE

E.M.C. TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 CLASS A	I/P : 230VAC /50HZ O/P : FULL LOAD Ta : 25℃	PASS

2	CONDUCTION	EN55011 CLASS B	I/P： 230VAC /50HZ O/P： FULL LOAD / 50% LOAD Ta： 25℃	PASS Test by certified Lab
3	RADIATION	EN55011 CLASS B	I/P： 230VAC /50HZ O/P： FULL LOAD Ta： 25℃	PASS Test by certified Lab
4	E.S.D	EN61000-4-2 AIR：15KV / Contact：8KV	I/P： 230VAC /50HZ O/P： FULL LOAD Ta： 25℃	CRITERIA A
5	E.F.T	EN61000-4-4 MEDICAL INPUT： 2KV	I/P： 230VAC /50HZ O/P： FULL LOAD Ta： 25℃	CRITERIA A
6	SURGE	EN61000-4-5 MEDICAL LINE-LINE:1KV	I/P： 230VAC /50HZ O/P： FULL LOAD Ta： 25℃	CRITERIA A

■RELIABILITY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	TEMPERATURE RISE TEST	MODEL： MPM-30-24 1. ROOM AMBIENT BURN-IN： 1.0hrs IP: 230VAC O/P: 100% LOAD TA= 29.2℃ 2. HIGH AMBIENT BURN-IN： 1.0hrs IP: 230VAC O/P: 100% LOAD TA= 61.3℃		
2	OVER LOAD BURN-IN TEST	NO DAMAGE 1 HOUR (MIN)	I/P： 230VAC O/P： 164.0% LOAD Ta： 25℃	TEST：OK
3	LOW TEMPERATURE TURN ON TEST	NO DAMAGE 1 HOUR (MIN)	I/P： 264VAC / 100VAC O/P： FULL LOAD Ta： -40.0℃	TEST：OK
4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 60℃ NO DAMAGE	I/P： 272VAC O/P： FULL LOAD Ta： 60℃ HUMIDITY= 95.0% RH	TEST：OK
5	TEMPERATURE COEFFICIENT	±0.03% /℃(0~60℃)	I/P： 230VAC O/P： FULL LOAD	±0.0039% /℃(0~60℃)
6	STORAGE TEMPERATURE TEST	1. Thermal shock Temperature： -50℃~ +125℃ 2. Temperature change rate ：25℃ / MIN 3. Dwell time low and high temperature ： 30 MIN/EACH 4. Total test cycle：10 CYCLE 5. Input/Output condition： STATIC		TEST：OK
7	THERMAL SHOCK TEST	1. Thermal shock Temperature： -45℃ ~ 65℃ 2. Temperature change rate ：25℃ / MIN 3. Dwell time low and high temperature ： 30 MIN/EACH 4. Total test cycle：16 CYCLE 5. Input/Output condition： 230VAC Full Load AC ON/OFF test turn on 3sec；turn off 1sec @ 15CYCLE 230VAC Full Load AC ON turn on continue @ 1CYCLE		TEST：OK
8	VIBRATION TEST	1 Carton & 1 Set (1) Waveform： Sine Wave (2) Frequency：10~500Hz (4) Acceleration： 2G（Blank）/5G（ST） (5) Test Time：60min in each axis (X.Y.Z) (6) Ta：25℃		TEST：OK

NO.	Positio	ROOM AMBIENT 29.2℃	HIGH AMBIENT Ta： 61.3℃
1	LF1	56.0℃	83.8℃
2	LF2	57.4℃	84.6℃
3	C5	60.1℃	88.5℃
4	C40	58.8℃	87.5℃
5	BD1	61.2℃	89.1℃
6	R7	69.3℃	96.2℃
7	T1 COI	68.0℃	97.0℃
8	Q100	66.3℃	94.9℃
9	C105	63.0℃	91.6℃
10	L100	53.7℃	83.2℃
11	Q1	65.4℃	93.2℃
12	U1	60.5℃	86.9℃
13	D5	69.6℃	96.6℃
14	R40	65.3℃	93.0℃
60	TA	29.2℃	61.3℃

9	CAPACITOR LIFE CYCLE	:SUPPOSE C105 IS THE MOST CRITICAL COMPONENT									
		(1) I/P：	230VAC	O/P：FULL LOAD	Ta=	25℃	LIFE TIME	(1).	348686.2	HRS
		(2) I/P：	230VAC	O/P：FULL LOAD	Ta=	60℃	LIFE TIME	(2).	39278.6	HRS
		(3) I/P：	230VAC	O/P：75% LOAD	Ta=	60℃	LIFE TIME	(3).	53973.1	HRS
		(4) I/P：	230VAC	O/P：50% LOAD	Ta=	60℃	LIFE TIME	(4).	92840.8	HRS
10	MTBF	Conducted by Parts Stress Analysis Prediction 779K hrs min. MIL-HDBK-217F (25℃)								
11	DMTBF /Accelerated Life test	Demonstration Mean Time Between Failure (Expected Life): 30000HRS @ TA 60℃								

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	LIUTT		WANGDZ