


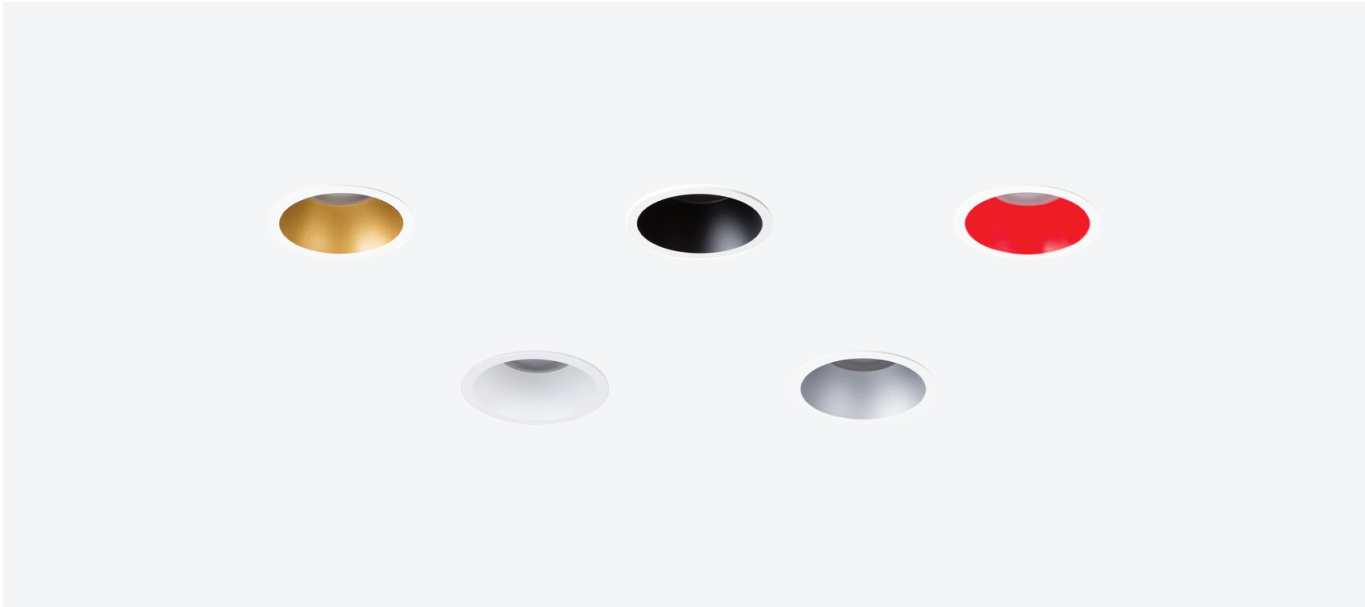


Ray Mini

Recessed Downlight

Order code	KC-010191A01
Input	230VAC
Power rating	3W
Beam angle	12° / 20°
Brightness	153 lm
Efficacy	≥51 lm/W
Colour render index(CRI)	≥90
Colour temperature	2700K / 3000K / 4000K
UGR	<19
IP level	IP20
Temperature range	-25°C~50°C
Dimming control	Dimmable (Dimmer Optional)
Tilttable	Fixed
Mounting	Recessed
Driver	Driver Included
Warranty	5 years warranty
Lifetime	50,000hrs
Material	Aluminum
Finish	● White+black ● White+silver ● White+gold ● White+red ○ White+white

(mm)

57



40



Finish colour	Beam angle	Colour temperature	Order code
 ● White+Black	12°	2700K	KC-010191A01-12D-2700K-WB
		3000K	KC-010191A01-12D-3000K-WB
		4000K	KC-010191A01-12D-4000K-WB
	20°	2700K	KC-010191A01-20D-2700K-WB
		3000K	KC-010191A01-20D-3000K-WB
		4000K	KC-010191A01-20D-4000K-WB
 ● White+Silver	12°	2700K	KC-010191A01-12D-2700K-WS
		3000K	KC-010191A01-12D-3000K-WS
		4000K	KC-010191A01-12D-4000K-WS
	20°	2700K	KC-010191A01-20D-2700K-WS
		3000K	KC-010191A01-20D-3000K-WS
		4000K	KC-010191A01-20D-4000K-WS
 ● White+Gold	12°	2700K	KC-010191A01-12D-2700K-WGD
		3000K	KC-010191A01-12D-3000K-WGD
		4000K	KC-010191A01-12D-4000K-WGD
	20°	2700K	KC-010191A01-20D-2700K-WGD
		3000K	KC-010191A01-20D-3000K-WGD
		4000K	KC-010191A01-20D-4000K-WGD

Finish colour	Beam angle	Colour temperature	Order code
 ☒ White+Red	12°	2700K	KC-010191A01-12D-2700K-WR
		3000K	KC-010191A01-12D-3000K-WR
		4000K	KC-010191A01-12D-4000K-WR
	20°	2700K	KC-010191A01-20D-2700K-WR
		3000K	KC-010191A01-20D-3000K-WR
		4000K	KC-010191A01-20D-4000K-WR
 ☐ White+White	12°	2700K	KC-010191A01-12D-2700K-WW
		3000K	KC-010191A01-12D-3000K-WW
		4000K	KC-010191A02-12D-4000K-WW
	20°	2700K	KC-010191A01-20D-2700K-WW
		3000K	KC-010191A01-20D-3000K-WW
		4000K	KC-010191A01-20D-4000K-WW