


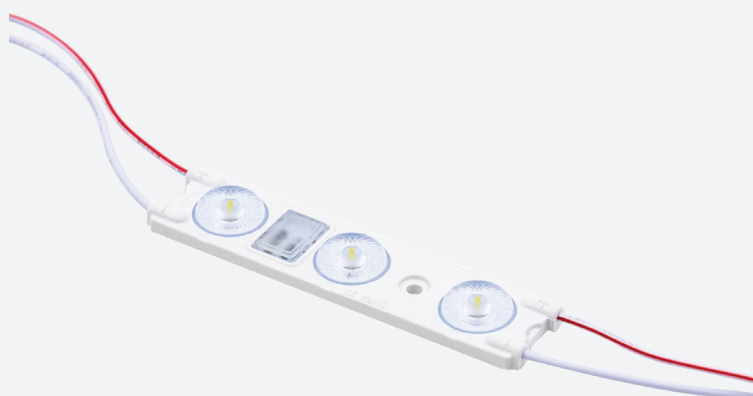

Feature

- High-brightness LED module for commercial signage & lighting
- Wide 180° Batwing optic design for even light distribution
- Designed for large channel letters and lightboxes
- Runs up to 40 modules per series with constant current technology
- Long service life with 7-years warranty
- Supplied in packs of 40 modules
- Suitable for both indoor and outdoor use (IP67)

Application

- Large channel letters requiring strong illumination
- Commercial signage with wide viewing areas
- Large-format lightboxes
- Indoor and outdoor advertising displays
- Retail, transport hubs, and commercial spaces where maximum brightness is needed

Parameters

Items	Parameters
Part Number	EV-BLHL03SS
CCT (K)	3000K/ 4000K/ 6500K
Beaming Angle (°)	180° ("Batwing" optic)
CRI (Ra)	≥80
Luminous Flux (lm)	252lm
Voltage (V)	24V
Power (W)	1.44W
Driving Method	Constant Current
Dimension (mm/inch)	84x20x7mm/ 3.31x0.79x0.28in
Working Tem. (°C/ °F)	-25°C ~ +60°C/ -13°F ~ +140°F
Protection Grade	IP67
Range (mm/inch)	120-200mm/ 4.72-7.87in
Includes	40 Modules per Pack
Max Series	40 Modules per Series

■ Dimension (Unit:mm/inch)

