Test Report: GST220A24-R7B

220W AC-DC High Reliability Industrial Adaptor

■ DESIGN VERIFY TEST

Output Function Test
Input Function Test
Protection Function Test
Component Stress Test

■ SAFETY & E.M.C. TEST

Safety Test
E.M.C. Test

■ RELIABILITY TEST

ENVIRONMENT TEST

■ DESIGN VERIFY TEST

OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OUTPUT VOLTAGE(Max) TOLERANCE	V1: -3%~ 3%	I/P: 100VAC /264VAC O/P:FULL/ MIN. LOAD Ta:25℃	V1: -0.753%~ 0.544%
2	LINE REGULATION (Max)	V1: -1%~ 1%	I/P: 100VAC~ 264VAC O/P:FULL LOAD Ta:25℃	V1: 0%~ 0%
3	LOAD REGULATION(Max)	V1: -3%~ 3%	I/P: 230VAC O/P:FULL ~MIN LOAD Ta:25℃	V1: -0.753%~ 0.544%
4	OVER/UNDERSHOOT TEST	< ±5%	I/P: 230VAC O/P:FULL LOAD Ta:25℃	< ±5%
5	RIPPLE & NOISE(Max)	V1: 150mVp-p	I/P:230VAC O/P:FULL LOAD Ta:25℃	V1: 15.8mVp-p
	high frequency： 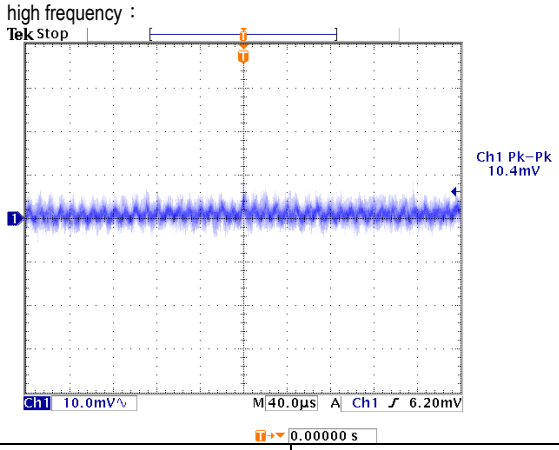			low frequency： 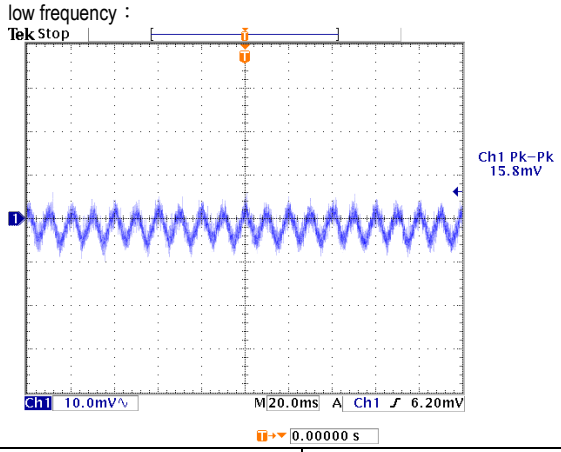
6	SET UP TIME(Max)	230VAC/2000ms 115VAC/2000ms	I/P： 230 VAC I/P： 115 VAC O/P：FULL LOAD Ta：25℃	230VAC/ 952ms 115VAC/ 1090ms
	INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage 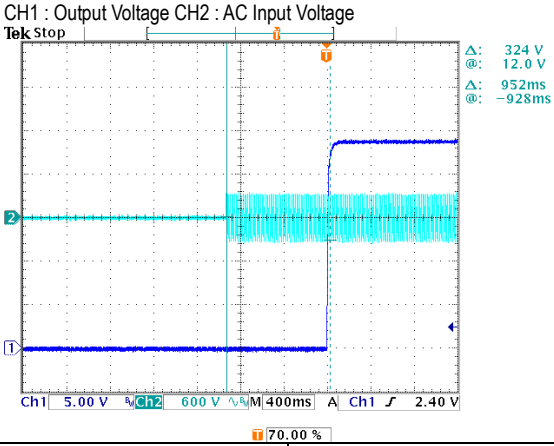			INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage 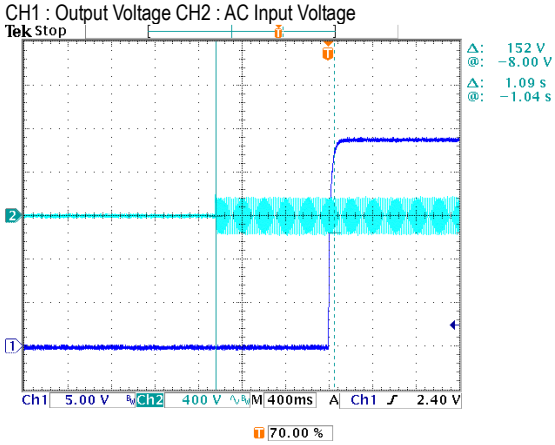
7	RISE TIME (Max)	230VAC/50ms 115VAC/50ms	I/P： 230 VAC I/P： 115 VAC	230VAC/ 17.2ms 115VAC/ 18.4ms

			O/P：FULL LOAD Ta：25℃	
	INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage 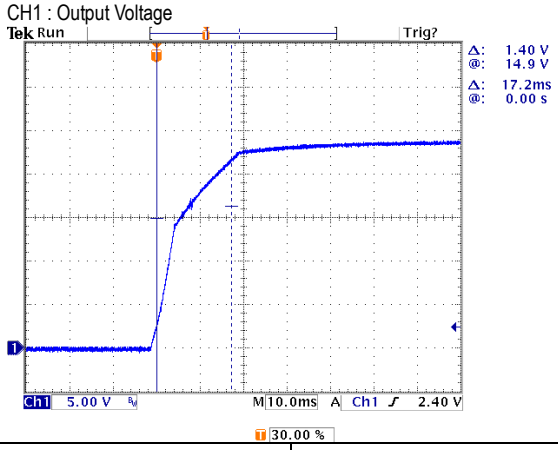		INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage 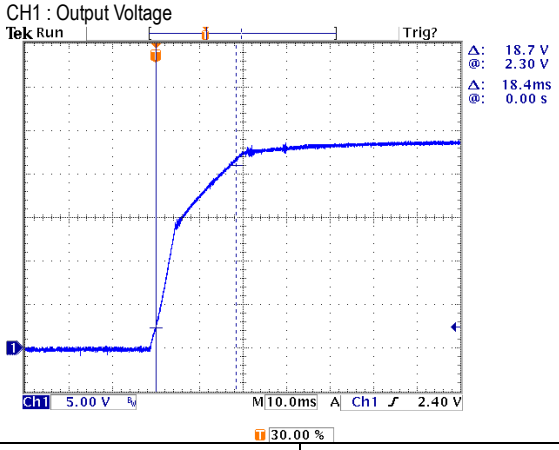	
8	HOLD UP TIME (Typ.)	230VAC/20ms 115VAC/20ms	I/P： 230 VAC I/P： 115 VAC O/P：FULL LOAD Ta：25℃	230VAC/26.4ms 115VAC/26.0ms
	INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage 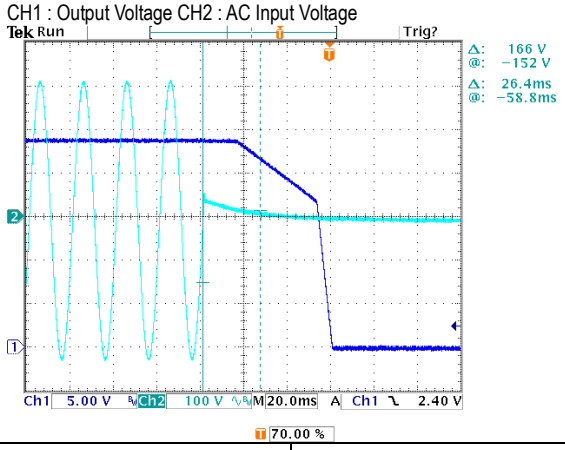		INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage 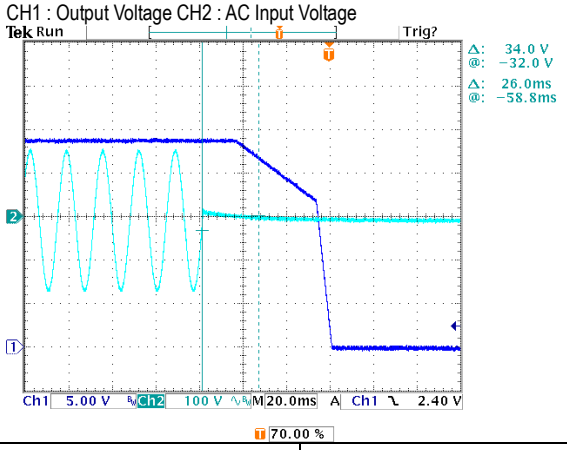	
9	DYNAMIC LOAD	V1: 1200mVp-p	I/P: 230VAC O/P: (1)FULL /50% LOAD 50%DUTY / 120HZ (2)FULL /50% LOAD 50%DUTY / 1KHZ Ta:25℃	 374mVp-p 374mVp-p
	FULL /50% LOAD 50%DUTY / 120HZ 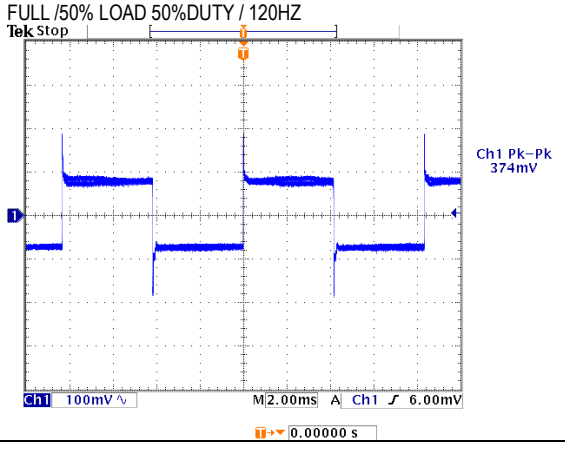		FULL /50% LOAD 50%DUTY / 1KHZ 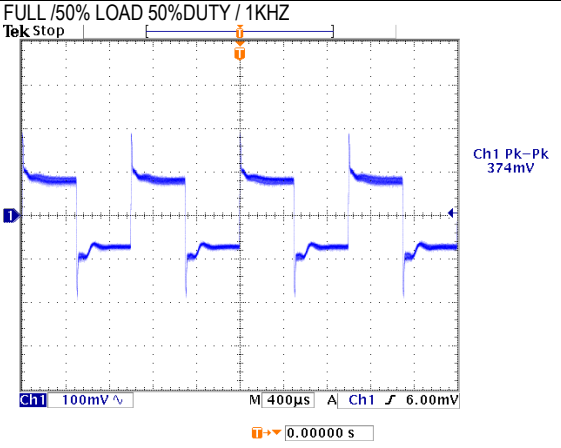	

INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	95VAC~264VAC	I/P:TESTING O/P:FULL LOAD Ta:25℃	72V~264V
			I/P: LOW-LINE-3V=82 V HIGH-LINE+15%=300 V O/P:FULL/MIN LOAD (PLEASE CHECK DERATING CURVE) ON: 30 Sec OFF: 30 Sec 10MIN (POWER ON/OFF NO DAMAGE)	TEST:OK
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE	I/P:100 VAC ~264 VAC O/P:FULL~MIN LOAD Ta:25℃	TEST: OK
3	INPUT CURRENT (Typ.)	230V/ 2A 115V/ 4A	I/P： 230 VAC I/P： 115 VAC O/P：FULL LOAD Ta：25℃	I =1.057A/ 230VAC I =2.076A/ 115VAC
4	LEAKAGE CURRENT	<0.75 mA / 240 VAC	I/P： 240 VAC O/P：Min LOAD Ta：25℃	L-FG： 0.352 mA N-FG： 0.352 mA
5	NO LOAD CONSUMPTION	< 0.15W	I/P：115VAC I/P：230VAC O/P：NO LOAD Ta：25℃	< 0.0957 W < 0.1023 W
6	POWER FACTOR (Typ.)	0.91/ 230VAC 0.98/115VAC	I/P： 230 VAC I/P： 115 VAC O/P：FULL LOAD Ta：25℃	PF=0.954/230VAC PF=0.991/115VAC
	P.F vs LOAD			
7	EFFICIENCY(Typ.)	93.5%	I/P:230 VAC O/P:FULL LOAD Ta:25℃	94.01%
	EFFICIENCY vs LOAD			

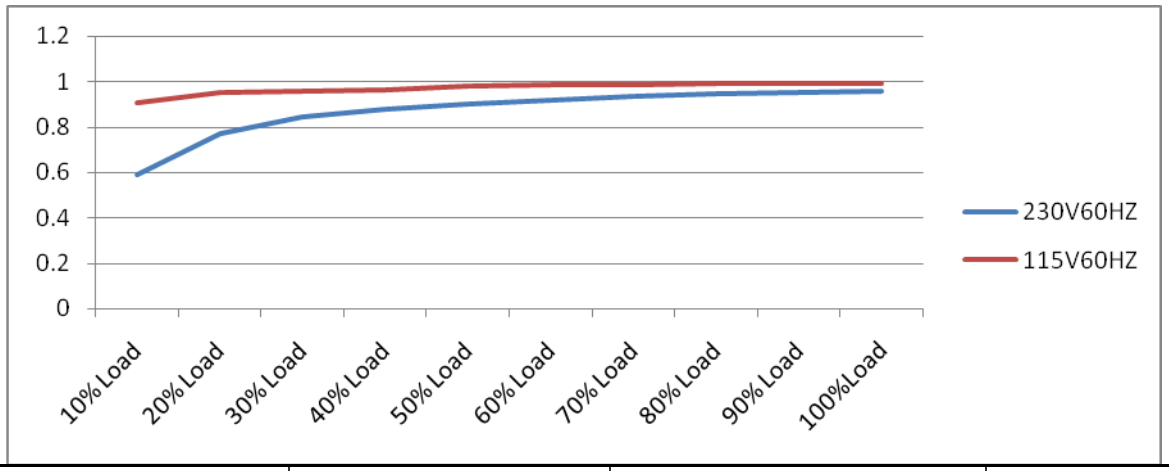

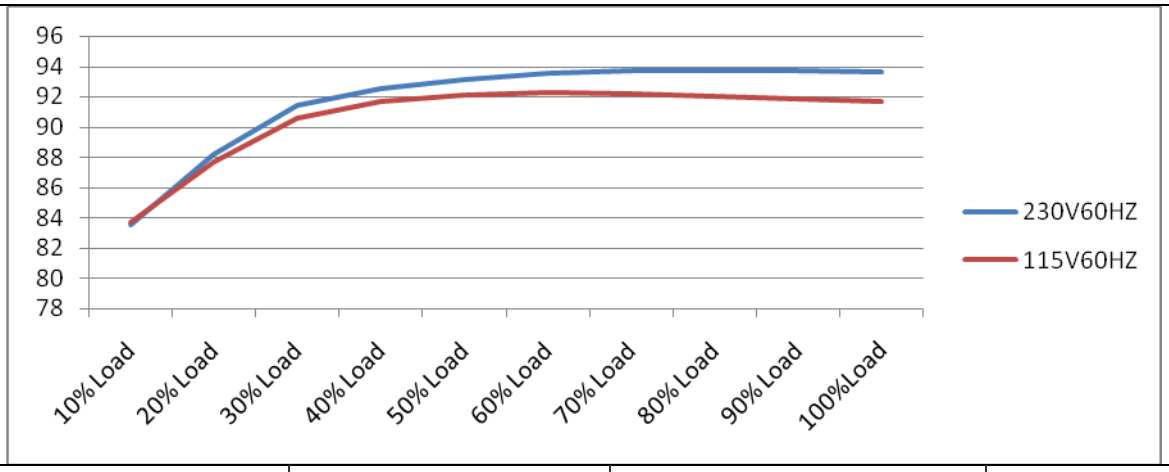

8	INRUSH CURRENT(Typ.)	230V/120A 115V/60A COLD START	I/P： 230 VAC I/P： 115 VAC O/P：FULL LOAD Ta：25℃	I =104A/ 230VAC I =50.4A/ 115VAC

INPUT=230VAC/50HZ @ FULL LOAD

CH2 : AC Input Voltage CH4 : Input current (1V=1A)

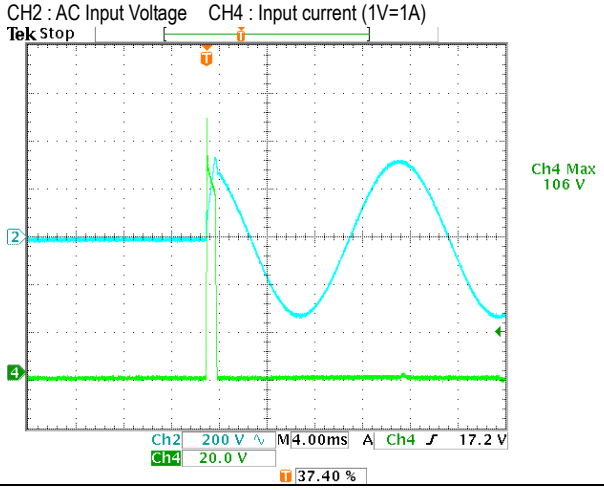

INPUT=115VAC/50HZ @ FULL LOAD

CH2 : AC Input Voltage CH4 : Input current (1V=1A)

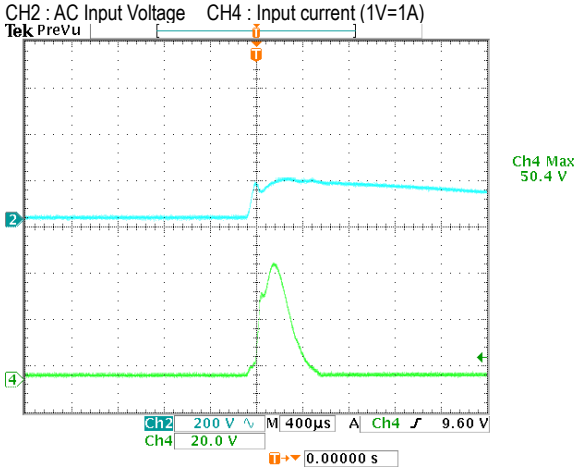

PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER LOAD PROTECTION	105%~ 135%	I/P: 264VAC I/P: 230VAC I/P: 100VAC O/P:TESTING Ta:25℃	126.63%/ 264VAC 126.30%/ 230VAC 127.17%/100VAC PROTECTION TYPE : Hiccup mode,recovers automatically after fault condition is removed
2	OVER VOLTAGE PROTECTION	25.2V~32.4V	I/P: 264VAC I/P: 230VAC I/P: 90VAC O/P:MIN LOAD Ta:25℃	29.8V/ 264VAC 29.8V/ 230VAC 29.8V/ 90VAC PROTECTION TYPE : Shot down o/p voltage,re-power on to recover
3	OVER TEMPERATURE PROTECTION	Protection type :	I/P: 264VAC I/P: 90VAC O/P:FULL LOAD	O.T.P. Active Protection type :Shut down o/p voltage,recovers automatically after temperature goes down
4	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 264VAC I/P: 90VAC O/P: FULL LOAD Ta:25℃	NO DAMAGE PROTECTION TYPE : Hiccup mode,recovers automatically after fault condition is removed

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Transistor (D to S) or (C to E) **Peak Voltage**	Q5 Rated : 18A/ 600V	I/P:High-Line +3V =267V AC ON/OFF VDS: O/P: (1)Full Load (2)Output Short (3) Full Load Continue Ta:25℃	 VDS: (1)V432 (2) 432V (3) 424V
2	P.F.C Transistor (D to S) or (C to E) **Peak Voltage**	Q1 Rated : 15.8 A/ 600 V	I/P:High-Line +3V =267V AC ON/OFF VDS: O/P: (1)Full Load (2)Output Short (3) Full Load Continue Ta:25℃	 VDS: (1)468V (2) 464V (3) 442V
3	P.F.C DIODE	D2 Rated : 15 A/ 600 V	I/P:High-Line +3V =267 V AC ON/OFF O/P: (1)Full Load (2)Output Short (3)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (4)Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz Ta:25℃	 (1)422 V (2) 426V (3) 422V (4) 422V
4	Diode Peak **Voltage**	Q101 Rated : 80 A/ 75V	I/P:High-Line +3V =267V AC ON/OFF VDS: O/P: (1)Full Load (2)Output Short (3) Full Load Continue	Q101: VDS: (1) 58.0V (2) 6.56V (3) 58.0V
5	**Input Capacitor Voltage**	C5 Rated: : 220 μ /450 V 105 ℃	I/P:High-Line +3V =267 V O/P: (1)Full Load input on/off (2) Min load input on /Off (3)Full Load /Min load Change Ta:25℃	(1) 420V (2)420V (3)416V
6	**Control IC Voltage Test**	PWM IC U1 Rated : 32V -0.4 V(MIN.)	I/P:High-Line +3V =267 V AC ON/OFF O/P(1)FULL LOAD (2) Output Short (3)O.L.P (4)O.V.P. Ta:25℃	(1) 25.7V (2) 20.2V (3) 20.2V (4) 28.6V

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P: 3KVAC/min I/P-FG:2KVAX\C/min	I/P-O/P: 3.6 KVAC/min I/P-FG:2.4KVAX\C/min Ta:25℃	I/P-O/P:7.45mA I/P-FG:3.44mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P:500VDC>100MΩ	I/P-O/P: 500 VDC Ta:25℃	I/P-O/P: 9999MΩ NO DAMAGE

E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 CLASS A	I/P:230VAC/50HZ O/P:FULL LOAD Ta:25℃	PASS
2	CONDUCTION	EN55022 CLASS B	I/P： 230 VAC (50HZ) O/P：FULL/50% LOAD Ta：25℃	PASS Test by certified Lab
3	RADIATION	EN55022 CLASS B	I/P： 230 VAC (50HZ) O/P：FULL LOAD Ta：25℃	PASS Test by certified Lab
4	E.S.D	EN61000-4-2 LIGHT INDUSTRY AIR：8KV / Contact：4KV	I/P： 230 VAC/50HZ O/P：FULL LOAD Ta：25℃	CRITERIA A
5	E.F.T	EN61000-4-4 LIGHT INDUSTRY INPUT： 1KV	I/P： 230 VAC/50HZ O/P：FULL LOAD Ta：25℃	CRITERIA A
6	SURGE	IEC61000-4-5 LIGHT INDUSTRY L-N ：1KV L,N-PE：2KV	I/P： 230 VAC/50HZ O/P：FULL LOAD Ta：25℃	CRITERIA A
7	Test by certified Lab & Test Report Prepare			

■ RELIABILITY TEST

ENVIRONMENT TEST

<table>
<tr><th>NO</th><th>TEST ITEM</th><th>SPECIFICATION</th><th>TEST CONDITION</th><th>RESULT</th></tr>
<tr><td>1</td><td>TEMPERATURE RISE TEST</td><td colspan="3">MODEL： GST220A20-R7B
1. ROOM AMBIENT BURN-IN： 1HRS
I/P： 230VAC O/P： FULL LOAD Ta=27 ℃
2. HIGH AMBIENT BURN-IN： 1HRS
I/P： 230VAC O/P： FULL LOAD Ta= 53.8 ℃
<table>
<tr><th>NO</th><th>Position</th><th>ROOM AMBIENT Ta= 27 ℃</th><th>HIGH AMBIENT Ta= 53.8 ℃</th></tr>
<tr><td>1</td><td>LF2</td><td>61.0℃</td><td>89.0℃</td></tr>
<tr><td>2</td><td>L2</td><td>63.0℃</td><td>91.4℃</td></tr>
<tr><td>3</td><td>C2</td><td>59.4℃</td><td>85.9℃</td></tr>
<tr><td>4</td><td>C11</td><td>62.6℃</td><td>91.4℃</td></tr>
<tr><td>5</td><td>C1</td><td>60.5℃</td><td>89.2℃</td></tr>
<tr><td>6</td><td>BD1</td><td>63.0℃</td><td>90.5℃</td></tr>
<tr><td>7</td><td>D2</td><td>64.7℃</td><td>92.7℃</td></tr>
<tr><td>8</td><td>Q2</td><td>63.6℃</td><td>91.9℃</td></tr>
<tr><td>9</td><td>L1</td><td>65.9℃</td><td>95.0℃</td></tr>
<tr><td>10</td><td>C5</td><td>66.7℃</td><td>95.5℃</td></tr>
<tr><td>11</td><td>C81</td><td>65.5℃</td><td>94.1℃</td></tr>
<tr><td>12</td><td>C13</td><td>69.1℃</td><td>98.2℃</td></tr>
<tr><td>13</td><td>T1</td><td>74.5℃</td><td>105.0℃</td></tr>
<tr><td>14</td><td>U4</td><td>66.7℃</td><td>94.7℃</td></tr>
<tr><td>15</td><td>TSW1</td><td>59.5℃</td><td>88.7℃</td></tr>
<tr><td>16</td><td>RTH2</td><td>63.1℃</td><td>90.6℃</td></tr>
<tr><td>17</td><td>Q102</td><td>70.5℃</td><td>100.9℃</td></tr>
<tr><td>18</td><td>C109</td><td>68.6℃</td><td>98.3℃</td></tr>
<tr><td>19</td><td>U1</td><td>71.4℃</td><td>99.6℃</td></tr>
</table></td></tr>
<tr><td>2</td><td>OVER LOAD BURN-IN TEST</td><td>NO DAMAGE
1 HOUR (MIN)</td><td>I/P： 230 VAC
O/P： 130 % LOAD
Ta：25℃</td><td>TEST：OK</td></tr>
<tr><td>3</td><td>LOW TEMPERATURE
TURN ON TEST</td><td>TURN ON AFTER 2 HOUR</td><td>I/P： 264VAC/100VAC
O/P： 100 % LOAD
Ta= -35 ℃</td><td>TEST：OK</td></tr>
<tr><td>4</td><td>HIGH HUMIDITY
HIGH TEMPERATURE
HIGH VOLTAGE
TURN ON TEST</td><td>AFTER 12 HOURS
IN CHAMBER ON
CONTROL 50 ℃
NO DAMAGE</td><td>I/P： 272 VAC
O/P：FULL LOAD
Ta= 50.1 ℃
HUMIDITY= 95 %R.H</td><td>TEST：OK</td></tr>
<tr><td>5</td><td>TEMPERATURE
COEFFICIENT</td><td>± 0.03 %/℃(0~50℃)</td><td>I/P： 230 VAC
O/P：FULL LOAD</td><td>± 0.003 %/℃(0~50℃)</td></tr>
<tr><td>6</td><td>STORAGE TEMPERATURE TEST</td><td colspan="2">1. Thermal shock Temperature： -40℃~ +85℃
2. Temperature change rate ：25℃ / MIN
3. Dwell time low and high temperature ： 30 MIN/EACH
4. Total test cycle：5 CYCLE
5. Input/Output condition： STATIC</td><td>OK</td></tr>
</table>

7	THERMAL SHOCK TEST	1. Thermal shock Temperature： -30℃~ +70℃ 2. Temperature change rate ：25℃ / MIN 3. Dwell time low and high temperature ： 30 MIN/EACH 4. Total test cycle：10 CYCLE 5. Input/Output condition： 230VAC/Full Load AC ON/OFF TEST turn on 58sec；turn off 2sec	OK
8	VIBRATION TEST	1 Carton & 1 Set (1) Waveform： Sine Wave (2) Frequency：10~500Hz (3) Sweep Time：12min/sweep cycle (4) Acceleration：2G (5) Test Time：60min in each axis (X.Y.Z) (6) Ta：25℃	TEST：OK
9	CAPACITOR LIFE CYCLE	SUPPOSE C 109 IS THE MOST CRITICAL COMPONENT (1) I/P： 230VAC O/P：FULL LOAD Ta= 25 ℃ LIFE TIME (2) I/P： 230VAC O/P：FULL LOAD Ta= 50 ℃ LIFE TIME (3) I/P： 230VAC O/P：75% LOAD Ta= 50 ℃ LIFE TIME (4) I/P： 230VAC O/P：50% LOAD Ta= 50 ℃ LIFE TIME	(1) 162961HRS (2) 23556HRS (3) 52689HRS (4) 86715HRS
10	MTBF	MIL-HDBK-217F TOTAL FAILURE RATE： 209.4 KHRS	
11	DMTBF/Accelerated Life Test	Demonstration Mean Time Between Failure (Expected Life): Above 50,000 hours @ TA 50℃	

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	FRANK	GESG	WANGDZ

12.10.30 A50-F031