Test Report: ERDN40-24

40A Enclosed Type Redundancy Module

■ DESIGN VERIFY TEST

Output Function Test
Input Function Test
Protection Function Test
Control Function Test
Component Stress Test

■ SAFETY & E.M.C. TEST

Safety Test
E.M.C. Test

■ RELIABILITY TEST

ENVIRONMENT TEST

■ DESIGN VERIFY TEST

OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	RATED CURRENT	0~40A CONTINUOUS	I/P：24VDC O/P：FULL LOAD Ta：25℃	OK
2	PEAK CURRENT	60A 5Sec NO DAMAGE	I/P: 24VDC O/P：60A Ta:25℃	OK
3	CAPACITANCE	320uF	I/P：24VDC O/P：320uF Ta：25℃	OK
4	STANDBY POWER LOSSES（Typ.）	1.5W	I/P：24VDC O/P：NO LOAD Ta：25℃	0.42W

INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	19VDC~29VDC	I/P:TESTING O/P:FULL LOAD Ta:25℃	17.66VDC~30.37VDC
2	RATED CURRENT	0~20Ax2 input, 0~40Ax1 input Continuous	I/P：24VDC O/P: 40A Ta:25℃	OK
3	VOLTAGE DROP (Vin-Vout) (max.)	0.2V	I/P：24VDC O/P：FULL LOAD Ta：25℃	0.15V
4	PEAK CURRENT	0~30Ax2 input, 0~60Ax1 5Sec NO DAMAGE	I/P: 24VDC O/P：60A Ta:25℃	OK
5	INPUT REVERSE CURRENT (max.)	1mA	I/P：40VDC O/P：FULL LOAD Ta：25℃	2.73uA
6	INPUT REVERSE VOLTAGE (max.)	40Vdc NO DAMAGE	I/P：40VDC O/P：FULL LOAD Ta：25℃	OK
7	EFFICIENCY(Typ.)	98%	I/P:24VDC O/P:FULL LOAD Ta:25℃	99.59%

EFFICIENCY vs LOAD

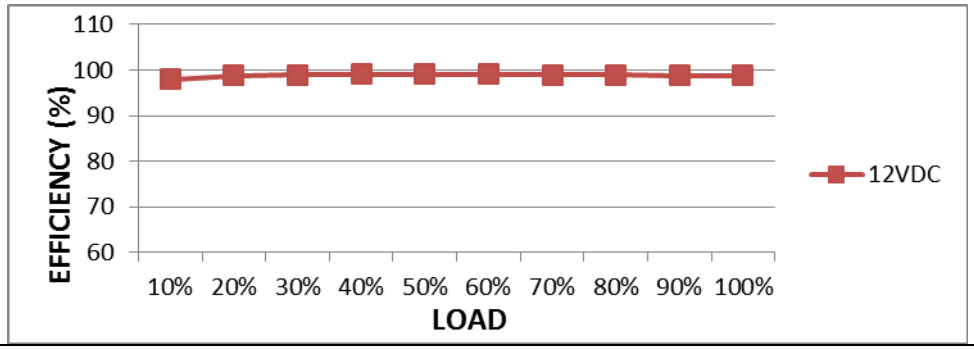

PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER LOAD PROTECTION	<60A No damage 5 sec (max)	I/P:24VDC O/P:60A Ta:25℃	NO DAMAGE
2	SHORT PROTECTION	<60A No damage 5 sec (max)	I/P: 29VDC O/P: FULL LOAD Ta:25℃	NO DAMAGE

CONTROL FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	RELAY	30VDC/1A RESISTIVE LOAD	I/P:24VDC O/P:FULL LOAD Ta:25℃	TEST : OK
2	REDUNDANCY	For 1+1 redundancy,and support N+1 redundancy	I/P:24VDC O/P:FULL LOAD Ta:25℃	TEST :OK
3	BOTH INPUTS VOLTANG ALARM	<18V OR >31V（±5%）	I/P:TESTING O/P:FULL LOAD Ta:25℃	TEST :OK
4	LED STATUS DISPLAY	GREEN LED OK	I/P:24VDC O/P:FULL LOAD Ta:25℃	TEST :OK

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	Transistor Peak Voltage	Q1 VGS Rated : ±20V Q3 VGS Rated : ±20V	I/P:29VDC DC ON/OFF O/P:FULL LOAD Ta:25℃	Q1 VGS:12.4V Q3 VGS:12.0V

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P/O/P-FG: 0.5KVAC/min I/P/FG-RELAY :0.5KVAC/min FG-RELAY:0.5KVAC/min	I/P/O/P-FG: 0.6 KVAC/min I/P/FG-RELAY: 0.6 KVAC/min O/P-FG:0.6 KVAC/min Ta:25℃	I/P/O/P-FG:7.62mA I/P/FG-RELAY:0.274mA FG-RELAY:0.262m A NO DAMAGE
2	ISOLATION RESISTANCE	I/P/O/P-FG:500VDC>100MΩ I/P/FG-RELAY: 500VDC>100MΩ FG-RELAY:500VDC>100MΩ	I/P/O/P-FG: 500 VDC I/P/FG-RELAY: 500 VDC FG-RELAY: 500 VDC Ta:25℃	I/P/O/P-FG: 9999MΩ I/P/FG-RELAY: 9999MΩ FG-RELAY:9999MΩ NO DAMAGE
3	GROUNDING CONTINUITY	FG(PE) TO CHASSIS OR TRACE < 100 mΩ	40A / 2min Ta:25℃	8 mΩ

E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	CONDUCTION	☑EN55032 CLASS B	I/P：24VDC O/P：FULL/50% LOAD Ta：25℃	PASS Test by certified Lab
2	RADIATION	☑EN55032 CLASS B	I/P：24VDC O/P：FULL LOAD Ta：25℃	PASS Test by certified Lab
3	E.S.D	EN61000-4-2 AIR：15KV / Contact：8KV	I/P：24VDC O/P：FULL LOAD Ta：25℃	☑CRITERIA A ☐CRITERIA B
4	E.F.T	EN61000-4-4 ☑INDUSTRY INPUT： 2KV	I/P：24VDC O/P：FULL LOAD Ta：25℃	☑CRITERIA A ☐CRITERIA B
5	SURGE	IEC61000-4-5 ☑LIGHT INDUSTRY L-N ：1KV L,N-PE：2KV	I/P： 24VDC O/P：FULL LOAD Ta：25℃	☑CRITERIA A ☐CRITERIA B
6	Test by certified Lab & Test Report Prepare Any contradictions of the test results, please refer to the latest EMC test report			

■ RELIABILITY TEST

ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	TEMPERATURE RISE TEST	MODEL：ERDN40-48 1. ROOM AMBIENT BURN-IN：2 HRS I/P： 48VDC O/P： FULL LOAD Ta= 28.4 ℃ 2. HIGH AMBIENT BURN-IN：2 HRS I/P： 48VDC O/P： FULL LOAD Ta= 63.6 ℃		

NO	Position	ROOM AMBIENT Ta= 28.4 ℃	HIGH AMBIENT Ta= 63.6 ℃
1	ZNR1	61.1℃	97.0℃
2	Q1	79.9℃	120.4℃
3	Q2	76.4℃	116.4℃
4	C17	60.1℃	96.2℃
5	C15	52.5℃	88.1℃
6	C16	53.8℃	90.0℃
7	RY1	47.5℃	81.5℃
8	RY2	46.5℃	82.2℃
9	PCB	76.4℃	114.8℃
10	U4	50.2℃	84.1℃
11	U1	52.9℃	87.4℃
12	U2	44.6℃	78.8℃
13	C4	48.4℃	81.6℃
14	D3	54.0℃	88.9℃
15	R54	56.2℃	91.8℃
16	R56	52.4℃	87.9℃
17	Q14	57.5℃	90.8℃
18	R48	55.6℃	89.2℃
19	Q21	47.2℃	82.1℃

2	OVER LOAD BURN-IN TEST	NO DAMAGE 1 HOUR (MIN)	I/P： 48 VDC O/P：115% LOAD Ta：25℃	TEST：OK
3	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P： 36VDC/60VDC O/P： 100 % LOAD Ta= -45℃	TEST：OK
4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 60 ℃ / 95 %R.H NO DAMAGE	I/P： 60 VDC O/P：FULL LOAD Ta= 60 ℃ HUMIDITY= 95 %R.H	TEST：OK
5	TEMPERATURE COEFFICIENT	± 0.03%/℃ (0~60℃)	I/P： 48 VDC O/P：FULL LOAD	± 0.012%/℃ (0~60℃)
6	STORAGE TEMPERATURE TEST	-40~85℃	1. Thermal shock Temperature： -45℃~ +90℃ 2. Temperature change rate ：25℃ / MIN 3. Dwell time low and high temperature ： 30 MIN/EACH 4. Total test cycle：10 CYCLE 5. Input/Output condition： STATIC	
7	THERMAL SHOCK TEST	-40~60℃	1. Thermal shock Temperature： -45℃~ +65℃ 2. Temperature change rate ：25℃ / MIN 3. Dwell time low and high temperature ： 30 MIN/EACH 4. Total test cycle：16 CYCLE 5. Input/Output condition： 15cycle:5VDC/ FULL LOAD AC ON 3sec/AC OFF 1sec TEST 1cycle:5VDC/ FULL LOAD Burn In Test	
8	VIBRATION TEST	10 ~ 500Hz, 5G 10min./1cycle, 60min. each along X, Y, Z axes	1 Carton & 1 Set (1) Waveform： Sine Wave (2) Frequency：10~500Hz (3) Sweep Time：12min/sweep cycle (4) Acceleration：6G (5) Test Time：180min in each axis (X.Y.Z) (6) Ta：25℃	
9	CAPACITOR LIFE CYCLE	SUPPOSE C17 IS THE MOST CRITICAL COMPONENT (1) I/P： 48VDC O/P：FULL LOAD Ta= 25 ℃ LIFE TIME (2) I/P： 48VDC O/P：FULL LOAD Ta= 60 ℃ LIFE TIME (3) I/P： 48VDC O/P：75% LOAD Ta= 60 ℃ LIFE TIME (4) I/P： 48VDC O/P：50% LOAD Ta= 60 ℃ LIFE TIME		(1) 199101HRS (2) 16534HRS (3) 37462 HRS (4) 74924 HRS
10	MTBF	Conducted by Parts Stress Analysis Prediction 570.61K hrs min. Telcordia SR-332 (Bellcore) ; 294.12K hrs min. MIL-HDBK-217F (25℃)		
11	Ongoing Reliability Test	I/P：48VDC O/P：FULL LOAD TA=50℃ Demonstration Mean Time Between Failure : 30000 hours		

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	LIUTT		WANGDZ

2018.4.30 GP-A50-F010