Connector block boxes: Flush mounting box 5M light blue

V71305

System infrastructure / Enclosures and control units / Connector block boxes / Flush mounting



Flush mounting box 5M light blue

5-module flush mounting box, (Glow Wire 650 °C), for masonry walls, light blue

- Plenty of space of internal wiring
- Knockouts designed for the insertion of pipes with various cross-sections
- Rack for fixing the dividing screen (patented)
- Fixing lug of the support screws with zinc-plating treatment to prevent the thread from clogging during installation and favour screwing
- Accessories available: coupling joints to create multiple series of boxes


Product Status

3 - Active

Minimum order quantity

6 NR


Drawings

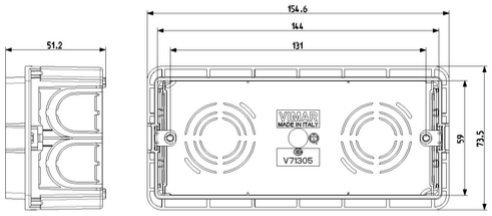

Space view



Backside view

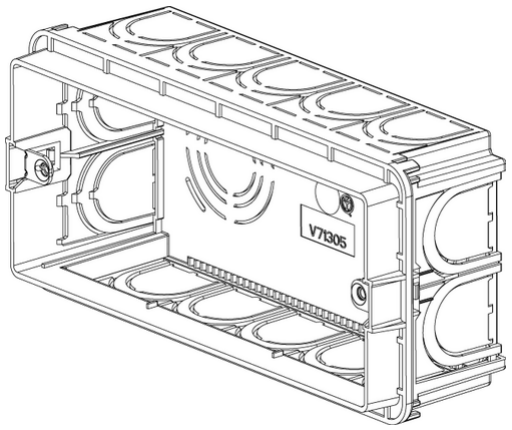

3D View

Certifications

- **00. CE Marking - EU**
- **01. IMQ - Italy (download)**
- **96. Electrotechnical expert (download)**

Technical data

Class group: Electrical installation, isolation and connection material

Class: Box/housing for built-in mounting in the wall/ceiling

Mounting method: Flush-mounted

Shape: Rectangular

Construction type: Device connection box (round/square)

Model: Other

Provided with revolving ring: No

Couplable: Yes

Equipped with: None

Diameter: 0 mm

Length: 59,00 mm

Width: 144,00 mm

Depth: 0,00 - 49,70 mm

Inner depth: 50,00 mm

For number of device inserts: 5

Mounting switching equipment: Screwing

With screws: No

Housing feed-through by break-out opening: Yes

Housing feed-through by seal membrane: No

Housing feed-through by nozzle: No

Housing feed-through by step membrane: No

For tube diameter: 20/25 mm

Pipe locking: No

Pipe locking optional: No

Inlet from the rear: Yes

Number of inlets: 16

Number of included spouts: 0

Material: Plastic

Halogen free: Yes

Surface protection: Untreated

Colour: Blue

Degree of protection (IP): IP00

Cover model: None

Transparent cover: No

Cover attachment: Screwed

Sealable: No

Circuit integrity: None

With screening: No

Airtight: No

Max. conductor cross section: 0 mm2

Number of poles of the clamp: 0

Clamp position fixed: No

Luminaire hook mounting: No

Nozzle: None

Special application: None

Packaging

8007352079465

Qtà	1 NR
Dim	15.4x6.9x5 [cm]
Weight	44.4 [g]

8007352079472

Qtà	6 NR
Dim	15.4x6.9x30 [cm]
Weight	274.73 [g]

8007352079489

Qtà	84 NR
Dim	61.5x37.5x24.5 [cm]
Weight	4,645.33 [g]

You may also be interested in



V71550 - Dividing screen for flush-mount box yell



V71563 - Joint plate for flush-mount bixes yellow



V71305.AU - Flush mounting box 5M black



V71325 - Antimortar cover for flush-mount box 5M

Legal

Vimar reserves the right to change at any time and without notice the characteristics of the products reported.Installation should be carried out by qualified staff in compliance with the current regulations regarding the installation of electrical equipment in the country where the products are installed.For the terms of use of the information on the product info sheet see Condizioni di utilizzo.