Connector block boxes: Flush-mount box 4M f/hollow walls blue

V71704

System infrastructure / Enclosures and control units / Connector block boxes / Flush mounting



Flush-mount box 4M f/hollow walls blue

4-module mounting frame (GW 850 °C) for hollow walls, light blue

- Suitable for several types of hollow walls (e.g. plasterboard, wood, plastic laminate or similar)
- Preparation of the hole with a hollow cutter with a diameter of 68 mm. Hole centring plate incorporated into the back
- Improved retention knockouts, designed for the insertion of pipes with various cross-sections (16, 20 or 25 mm) and metal fins for surface mounting the box on walls with a variable thickness of between 1 and 38 mm
- Fixing lugs for support screws made of metal
- Wide range of accessories available: accessories with a template function for tracing the hole, with joining function for mounting in series and installation on the inside of the wall; internal partitions; decorative covers


Product Status

3 - Active


Minimum order quantity

5 NR


Drawings

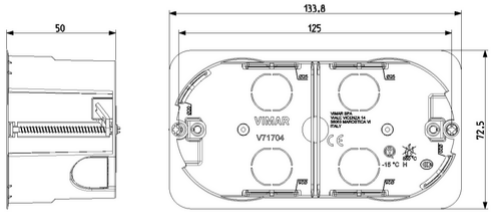

Space view

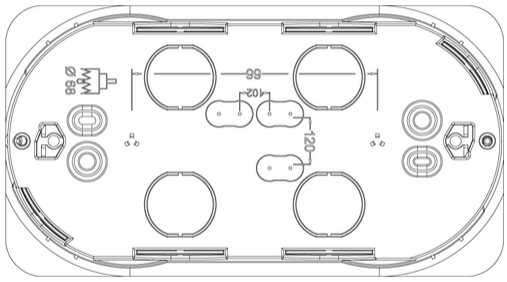

Backside view

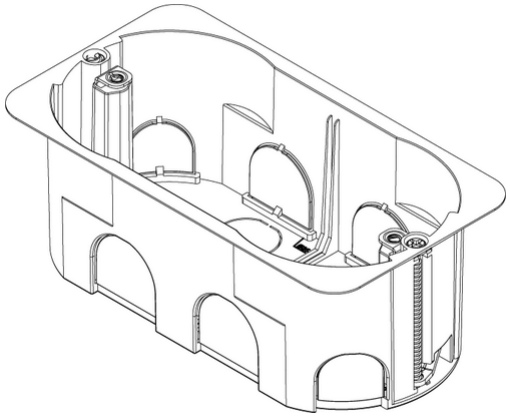

3D View

Certifications

- **00. CE Marking - EU**
- **01. IMQ - Italy**
- **50. Product Environm. Profile (download)**
- **96. Electrotechnical expert (download)**

Technical data

Class group: Electrical installation, isolation and connection material

Class: Box/housing for built-in mounting in the wall/ceiling

Mounting method: Hollow wall

Shape: Rectangular

Construction type: Device connection box (round/square)

Model: Other

Provided with revolving ring: No

Couplable: Yes

Equipped with: None

Diameter: 0 mm

Length: 72,50 mm

Width: 133,80 mm

Depth: 0,00 - 50,00 mm

Inner depth: 50,00 mm

For number of device inserts: 4

Mounting switching equipment: Screwing

With screws: No

Housing feed-through by break-out opening: Yes

Housing feed-through by seal membrane: No

Housing feed-through by nozzle: No

Housing feed-through by step membrane: No

For tube diameter: 20/25 mm

Pipe locking: No

Pipe locking optional: No

Inlet from the rear: Yes

Number of inlets: 14

Number of included spouts: 0

Material: Plastic

Halogen free: Yes

Surface protection: Untreated

Colour: Blue

Degree of protection (IP): IP00

Cover model: None

Transparent cover: No

Cover attachment: Screwed

Sealable: No

Circuit integrity: None

With screening: No

Airtight: No

Max. conductor cross section: 0 mm2

Number of poles of the clamp: 0

Clamp position fixed: No

Luminaire hook mounting: No

Nozzle: None

Special application: None

Packaging

8007352425705

Qtà	1 NR
Dim	13.4x7.2x5 [cm]
Weight	38.64 [g]

8007352425712

Qtà	5 NR
Dim	13.4x7.2x25 [cm]
Weight	193.2 [g]

8007352425729

Qtà	110 NR
Dim	59x38.5x30 [cm]
Weight	4,920 [g]

8007352750920

Qtà	2,640 NR
Dim	120x80x105 [cm]
Weight	122,152 [g]

You may also be interested in



V71550 - Dividing screen for flush-mount box yell

V71634 - Flat cover 4M



V71574 - Accessory for 4M boxes for hollow walls

Legal

Vimar reserves the right to change at any time and without notice the characteristics of the products reported.Installation should be carried out by qualified staff in compliance with the current regulations regarding the installation of electrical equipment in the country where the products are installed.For the terms of use of the information on the product info sheet see Condizioni di utilizzo.