Shared components: Supply unit 640mA KNX

01501.2

Smart systems&products / KNX / Shared components / DIN devices



Supply unit 640mA KNX

Power supply unit for home automation with Bus output of 30 Vdc 640 mA, auxiliary output 30 V d.c., power supply 120-240 V~ 50/60 Hz, with decoupling coil, KNX standard, installation on DIN rail (60715 TH35) occupies 4 17,5 mm modules

Product Status

3 - Active

Minimum order quantity

1 NR


Sheets, Manuals, Documentation

- Multilanguage instructions sheet (645 kb)

Product Software

- DB_ComponentiImpianto_KNX_REL-01.12_20231215.zip
- DB_ComponentiImpianto_KNX_REL-01.13_20240415.zip


Drawings

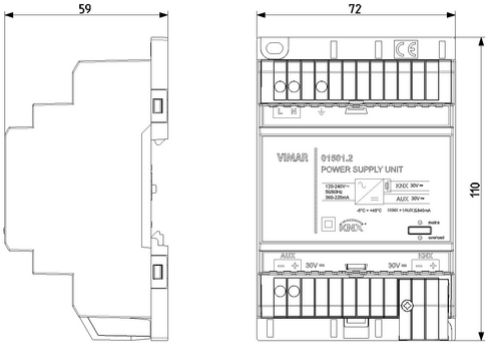

Space view



Backside view

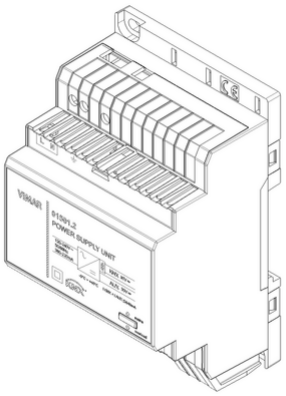

3D View

Certifications

- **00. CE Marking - EU**
- **19. NOM - Mexico**
- **27. KNX (download)**
- **37. Marking - Morocco**
- **92. RoHS UAE**
- **99. WEEE Directive (download)**

Technical data

Class group: Installation bus systems

Class: Power supply for bus system

Bus system KNX: Yes

Bus system KNX-RF (Radio Frequency): No

Bus system radio frequency: Yes

Bus system LON: No

Bus system Powernet: No

Other bus systems: None

Mounting method: Other

Width in number of modular spacings: 4

Width: 72,00 mm

Height: 110,00 mm

Depth: 59,00 mm

With LED indication: Yes

Bus voltage stockable: Yes

Number of lines to feed: 2

Max. output current: 640,00 mA

Packaging



8007352550148

Qtà	1 NR
Dim	11.7x10.8x7.1 [cm]
Weight	276.8 [g]

Legal

Vimar reserves the right to change at any time and without notice the characteristics of the products reported.Installation should be carried out by qualified staff in compliance with the current regulations regarding the installation of electrical equipment in the country where the products are installed.For the terms of use of the information on the product info sheet see Condizioni di utilizzo.