Connector block boxes: Flush mounting box 4M light blue

V71304

System infrastructure / Enclosures and control units / Connector block boxes / Flush mounting



Flush mounting box 4M light blue

4-module flush mounting box, (Glow Wire 650 °C), for masonry walls, light blue

- Plenty of space of internal wiring
- Wide range of accessories available: anti-mortar covers, coupling joints to create multiple series of boxes
- Knockouts designed for the insertion of pipes with various cross-sections
- Rack for fixing the dividing screen (patented)
- Fixing lug of the support screws with zinc-plating treatment to prevent the thread from clogging during installation and favour screwing


Product Status

3 - Active


Minimum order quantity

6 NR


Drawings

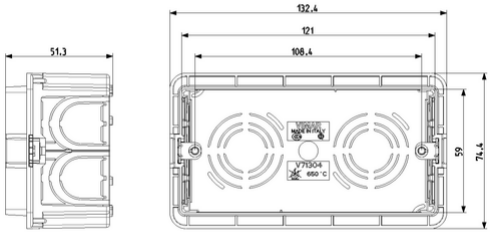

Space view

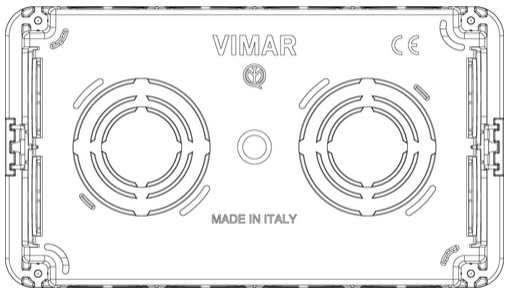

Backside view

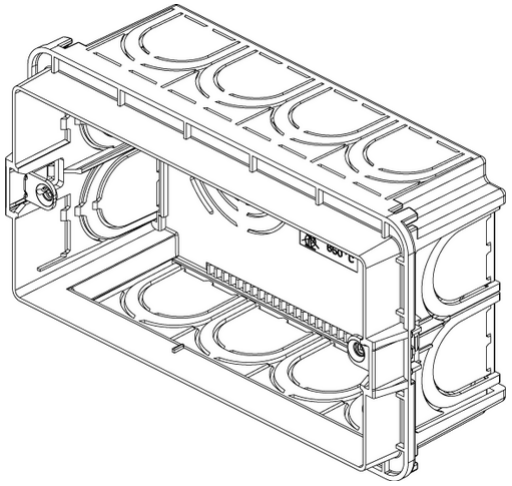

3D View

Certifications

- **00. CE Marking - EU**
- **01. IMQ - Italy (download)**
- **50. Product Environm. Profile (download)**
- **96. Electrotechnical expert (download)**

Technical data

Class group: Electrical installation, isolation and connection material

Class: Box/housing for built-in mounting in the wall/ceiling

Mounting method: Flush-mounted

Shape: Rectangular

Construction type: Device connection box (round/square)

Model: Other

Provided with revolving ring: No

Couplable: Yes

Equipped with: None

Diameter: 0 mm

Length: 59,00 mm

Width: 121,00 mm

Depth: 0,00 - 49,80 mm

Inner depth: 50,00 mm

For number of device inserts: 4

Mounting switching equipment: Screwing

With screws: No

Housing feed-through by break-out opening: Yes

Housing feed-through by seal membrane: No

Housing feed-through by nozzle: No

Housing feed-through by step membrane: No

For tube diameter: 20/25 mm

Pipe locking: No

Pipe locking optional: No

Inlet from the rear: Yes

Number of inlets: 14

Number of included spouts: 0

Material: Plastic

Halogen free: Yes

Surface protection: Untreated

Colour: Blue

Degree of protection (IP): IP00

Cover model: None

Transparent cover: No

Cover attachment: Screwed

Sealable: No

Circuit integrity: None

With screening: No

Airtight: No

Max. conductor cross section: 0 mm2

Number of poles of the clamp: 0

Clamp position fixed: No

Luminaire hook mounting: No

Nozzle: None

Special application: None

Packaging

8007352079403

Qtà	1 NR
Dim	13.1x6.9x5 [cm]
Weight	38.2 [g]

8007352079410

Qtà	6 NR
Dim	13.1x6.9x30 [cm]
Weight	238.27 [g]

8007352079427

Qtà	96 NR
Dim	59.5x38.5x26.5 [cm]
Weight	4,640 [g]

8007352356245

Qtà	2,304 NR
Dim	80x120x180 [cm]
Weight	115,000 [g]

You may also be interested in



V71550 - Dividing screen for flush-mount box yell



V71304.AU - Flush mounting box 4M black



V71563 - Joint plate for flush-mount bixes yellow



V71704 - Flush-mount box 4M f/hollow walls blue

V71634 - Flat cover 4M



V71324 - Antimortar cover for flush-mount box 4M

Legal

Vimar reserves the right to change at any time and without notice the characteristics of the products reported.Installation should be carried out by qualified staff in compliance with the current regulations regarding the installation of electrical equipment in the country where the products are installed.For the terms of use of the information on the product info sheet see Condizioni di utilizzo.