Connector block boxes: Flush mounting box 3M light blue

V71303

System infrastructure / Enclosures and control units / Connector block boxes / Flush mounting



Flush mounting box 3M light blue

3-module flush mounting box, (Glow Wire 650 °C), for masonry walls, light blue

- Plenty of space of internal wiring
- Wide range of accessories available: anti-mortar covers, coupling joints to create multiple series of boxes
- Knockouts designed for the insertion of pipes with various cross-sections
- Rack for fixing the dividing screen (patented)
- Fixing lug of the support screws with zinc-plating treatment to prevent the thread from clogging during installation and favour screwing

Product Status

3 - Active

Minimum order quantity


15 NR

Gallery







Drawings

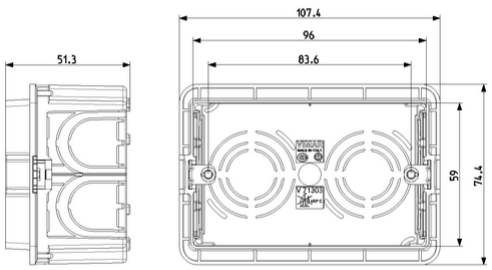

Space view

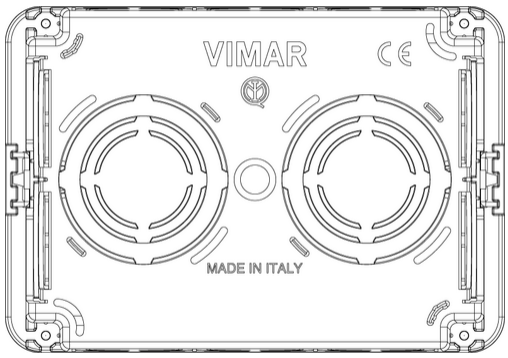

Backside view

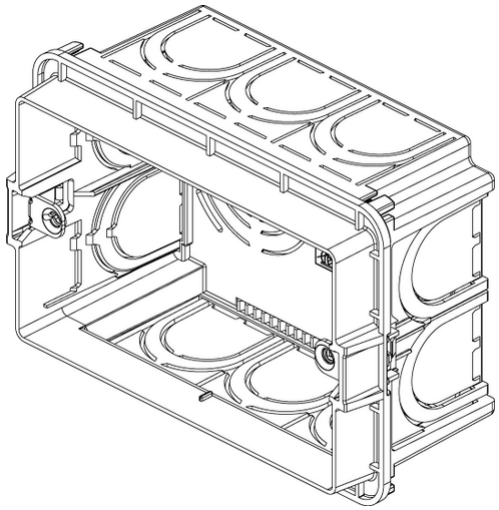

3D View

Certifications

- **00. CE Marking - EU**
- **01. IMQ - Italy (download)**
- **50. Product Environm. Profile (download)**
- **96. Electrotechnical expert (download)**

Technical data

Class group: Electrical installation, isolation and connection material

Class: Box/housing for built-in mounting in the wall/ceiling

Mounting method: Flush-mounted

Shape: Rectangular

Construction type: Device connection box (round/square)

Model: Other

Provided with revolving ring: No

Couplable: Yes

Equipped with: None

Diameter: 0 mm

Length: 59,00 mm

Width: 96,00 mm

Depth: 0,00 - 49,80 mm

Inner depth: 50,00 mm

For number of device inserts: 3

Mounting switching equipment: Screwing

With screws: No

Housing feed-through by break-out opening: Yes

Housing feed-through by seal membrane: No

Housing feed-through by nozzle: No

Housing feed-through by step membrane: No

For tube diameter: 20/25 mm

Pipe locking: No

Pipe locking optional: No

Inlet from the rear: Yes

Number of inlets: 12

Number of included spouts: 0

Material: Plastic

Halogen free: Yes

Surface protection: Untreated

Colour: Blue

Degree of protection (IP): IP00

Cover model: None

Transparent cover: No

Cover attachment: Screwed

Sealable: No

Circuit integrity: None

With screening: No

Airtight: No

Max. conductor cross section: 0 mm2

Number of poles of the clamp: 0

Clamp position fixed: No

Luminaire hook mounting: No

Nozzle: None

Special application: None

Packaging

8007352079342

Qtà	1 NR
Dim	10.6x7.4x5 [cm]
Weight	32.27 [g]

8007352119420

Qtà	15 NR
Dim	54x10.7x7.5 [cm]
Weight	504 [g]

8007352119451

Qtà	300 NR
Dim	59x39x44 [cm]
Weight	11,250 [g]

8007352263499

Qtà	4,800 NR
Dim	80x120x190 [cm]
Weight	190,720 [g]

You may also be interested in



V71303.AU - Flush mounting box 3M black



V71550 - Dividing screen for flush-mount box yell



V71703 - Flush-mount box 3M f/hollow walls blue



V71563 - Joint plate for flush-mount bixes yellow

V71633 - Flat cover 3M



V71323 - Antimortar cover for flush-mount box 3M

Legal

Vimar reserves the right to change at any time and without notice the characteristics of the products reported.Installation should be carried out by qualified staff in compliance with the current regulations regarding the installation of electrical equipment in the country where the products are installed.For the terms of use of the information on the product info sheet see Condizioni di utilizzo.