# ARKÉ: 1P 16AX 1-way switch Metal

**19001.M**

Wiring devices / Traditional wiring devices / ARKÉ / Devices



**1P 16AX 1-way switch Metal**

1P 16 AX 250 V~ 1-way switch, lightable, replaceable button, Metal. Max 200 W for self-ballasted lamps (IEC 60669-1:2017)

**Product Status**

3 - Active

**Minimum order quantity**


50 NR

## Gallery







## Drawings

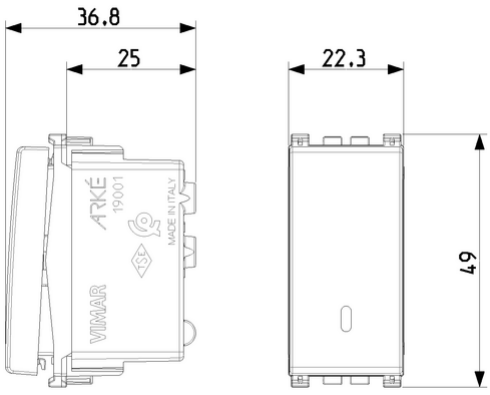


Space view

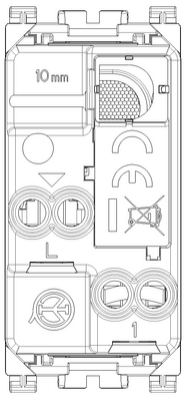


Backside view

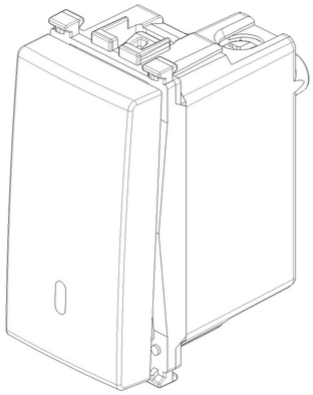

3D View

## Certifications

- **00. CE Marking - EU**
- **01. IMQ - Italy (download)**
- **07. INGCER - Chile**
- **14. TSE - Turkey**
- **15. CCC - China (download)**
- **19. NOM - Mexico**
- **26. SASO - Saudi Arabia (download)**
- **31. TISI - Thailand**
- **34. PSE - Japan**
- **35. RCM - Australia**
- **36. ISI - India**
- **37. Marking - Morocco**
- **50. Product Environm. Profile (download)**
- **96. Electrotechnical expert (download)**
- **99. WEEE Directive (download)**

## Technical data

**Class group**: Domestic switching devices

**Class**: Installation switch

**Wiring system**: Switch 1-pole

**Operating method**: Rocker/button

**Assembly arrangement**: Modular device for domestic switching devices

**Number of modules (module system)**: 1

**Push button switch**: Yes

**Number of rockers**: 1

**Mounting method**: Flush-mounted

**Type of fastening**: Engage (snap)

**With mounting plate**: No

**Material**: Plastic

**Material quality**: Thermoplastic

**Halogen free**: Yes

**Surface protection**: Lacquered

**Surface finishing**: Matt

**Colour**: Aluminium

**RAL-number (similar)**: 9007

**Label space/information surface**: Yes

**Lighting**: Optional

**Function lighting**: Control and orientation

**Type of lighting**: LED exchangeable

**Suitable for degree of protection (IP)**: IP40

**Nominal voltage**: 250 V

**Rated current**: 16,00 A

**Monitoring contact**: No

**Connection type**: Screwed terminal

**Washing machine switch**: No

**Device width**: 22,30 mm

**Device height**: 49,00 mm

**Device depth**: 36,80 mm

**Built-in depth**: 25,00 mm

## Packaging



8007352594975

| | |
|---|---|
| **Qtà** | 1 NR |
| **Dim** | 4.1x2.8x5.3 [cm] |
| **Weight** | 25 [g] |



8007352594982

| | |
|---|---|
| **Qtà** | 50 NR |
| **Dim** | 21.4x11.6x14.2 [cm] |
| **Weight** | 1,331 [g] |



8007352594999

| | |
|---|---|
| **Qtà** | 500 NR |
| **Dim** | 57.5x22.5x30 [cm] |
| **Weight** | 13,700 [g] |



8007352750463

| | |
|---|---|
| **Qtà** | 10,500 NR |
| **Dim** | 120x80x105 [cm] |
| **Weight** | 289,464 [g] |

## Legal

Vimar reserves the right to change at any time and without notice the characteristics of the products reported.Installation should be carried out by qualified staff in compliance with the current regulations regarding the installation of electrical equipment in the country where the products are installed.For the terms of use of the information on the product info sheet see Condizioni di utilizzo.