



# LED Strips

0800 66 65 64



12V 9.6 W/m 2 Yrs Wty

ECOSERIES

Specifications

|                 |                                                                 |
|-----------------|-----------------------------------------------------------------|
| Power Rating:   | 9.6W/m                                                          |
| Input Voltage:  | 12V DC                                                          |
| LED Density:    | 120 LEDs/m                                                      |
| Cutting Length: | 25mm                                                            |
| Beaming Angle:  | 120 °                                                           |
| Width           | 8mm (Non-waterproof)<br>12mm (Waterproof)                       |
| Lifetime        | 50000 hrs @ 25 °C                                               |
| Connections     | 200mm Wire<br>P1J Female Connector (only available for 5m roll) |
| Mounting        | Standard: 3M Tape<br>Waterproof: Mounting Clip                  |
| Warranty        | 2 Years                                                         |

Models

| SKU (Order Code)       | Color         | CCT   |  | Brightness   | IP Rating |
|------------------------|---------------|-------|--|--------------|-----------|
| 3528-1201200SCX-CW-[ ] | Cool White    | 6000K |  | 780 Lumens/m | -         |
| 3528-1201200SCX-NW-[ ] | Natural White | 4000K |  | 660 Lumens/m | -         |
| 3528-1201200SCX-WW-[ ] | Warm White    | 3000K |  | 640 Lumens/m | -         |
| 3528-1201268SCX-CW-5   | Cool White    | 6000K |  | 780 Lumens/m | IP68      |
| 3528-1201268SCX-NW-5   | Natural White | 4000K |  | 660 Lumens/m | IP68      |
| 3528-1201268SCX-WW-5   | Warm White    | 3000K |  | 640 Lumens/m | IP68      |

[ ] = 1, 2, 3, 4 or 5  
1 = 1 meter ; 2 = 2 meters ; 3 = 3 meters ; 4 = 4 meters ; 5 = 5 metres

Product Details - Non-waterproof Strips (ECO)



- 1. ECO Non-waterproof - 5m roll
- 2. 3528SMD LED chip with brown PCB
- 3. P1J Connector (Only available in 5m roll)
- 4. 200mm Wire Connector



Included Accessories in 5m Pack



5 x Solder-less Connector

Product Details - Waterproof Strips (ECO68)



- 5. ECO68 Waterproof - 5m roll
- 6. 3528SMD LED chip with brown PCB
- 7. P1J Male Connector - Waterproof
- 8. P1J Female Connector - Waterproof



Included Accessories in 5m Pack



1 x P1J Waterproof Female Connector



1 x P1J Waterproof Male Connector



20 x Mounting Clips



1 x Silicone Glue



2 x End Caps

# ECO Series - Accessories



## Recommended Drivers

| Length | Power Required | SKU (Order Code)<br>Power adaptor with P1J connector | Waterproof driver with bare wire connection |
|--------|----------------|------------------------------------------------------|---------------------------------------------|
| 1m     | 9.6W           | GE12I12-P1J                                          | -                                           |
| 2m     | 19.2W          | GS25A12-P1J                                          | -                                           |
| 3m     | 28.8W          | GS40A12-P1J                                          | -                                           |
| 4m     | 38.4W          | GS40A12-P1J                                          | -                                           |
| 5m     | 48W            | GS60A12-P1J                                          | LPV-60-12                                   |



## Dimming / Control Options



**LT-3600**  
LED Dimmer with On-board Control



**M1+M3-3A**  
Remote Controlled Dimmer



**D1**  
Wall-mount Dimmer



**LT-811-10A**  
DMX Decoder



**Z-DM-LT-701**  
1-10V Dimmer, Compatible with Major Faceplates

## Accessories



**P1J-F1**  
Female P1J Connector



**CON-IP68-2P**  
2-Way IP68 Waterproof Connector



**222-412**  
2-Way Wire Connector

## Extrusions



## Dot-free professional finish for LED Strips

Please refer to extrusion section for our full range



24V 9.6 W/m 2 Yrs Wty

ECO+ SERIES PLUS

Specifications

|                 |                                                                 |
|-----------------|-----------------------------------------------------------------|
| Power Rating:   | 9.6W/m                                                          |
| Input Voltage:  | 24V DC                                                          |
| LED Density:    | 120 LEDs/m                                                      |
| Cutting Length: | 50mm                                                            |
| Beaming Angle:  | 120 °                                                           |
| Width           | 10mm (Non-waterproof)<br>12mm (Waterproof)                      |
| Lifetime        | 50000 hrs @ 25 °C                                               |
| Connections     | 200mm Wire<br>P1J Female Connector (only available for 5m roll) |
| Mounting        | Standard: 3M Tape<br>Waterproof: Mounting Clip                  |
| Warranty        | 2 Years                                                         |

Models

| SKU (Order Code)       | Color         | CCT   |  | Brightness   | IP Rating |
|------------------------|---------------|-------|--|--------------|-----------|
| 3528-1202400SCX-CW-[ ] | Cool White    | 6000K |  | 850 Lumens/m | -         |
| 3528-1202400SCX-NW-[ ] | Natural White | 4000K |  | 810 Lumens/m | -         |
| 3528-1202400SCX-WW-[ ] | Warm White    | 3000K |  | 790 Lumens/m | -         |
| 3528-1202468SCX-CW-5   | Cool White    | 6000K |  | 850 Lumens/m | IP68      |
| 3528-1202468SCX-NW-5   | Natural White | 4000K |  | 810 Lumens/m | IP68      |
| 3528-1202468SCX-WW-5   | Warm White    | 3000K |  | 790 Lumens/m | IP68      |

[ ] = 1, 2, 3, 4 or 5  
1 = 1 meter ; 2 = 2 meters ; 3 = 3 meters ; 4 = 4 meters ; 5 = 5 metres

Product Details - Non-waterproof Strips (ECOP)



- 1. ECOP Non-waterproof - 5m roll
- 2. 3528SMD LED chip with white PCB
- 3. P1J Connector (Only available in 5m roll)
- 4. 200mm wire connector



Included Accessories in 5m Pack



5 x Solder-less Connectors

Product Details - Waterproof Strips (ECOP68)



- 5. ECOP68 Waterproof - 5m roll
- 6. 3528SMD LED chip with white PCB
- 7. P1J Male Connector - Waterproof
- 8. P1J Female Connector - Waterproof



Included Accessories in 5m Pack



1 x P1J Waterproof Female Connector



1 x P1J Waterproof Male Connector



20 x Mounting Clips



1 x Silicone Glue



2 x End Caps

# ECO+ Series - Accessories



## Recommended Drivers

| Length | Power Required | SKU (Order Code)<br>Power adaptor with P1J connector | Waterproof driver with bare wire connection |
|--------|----------------|------------------------------------------------------|---------------------------------------------|
| 1m     | 9.6W           | GE12I24-P1J                                          | -                                           |
| 2m     | 19.2W          | GS25A24-P1J                                          | -                                           |
| 3m     | 28.8W          | GS40A24-P1J                                          | -                                           |
| 4m     | 38.4W          | GS40A24-P1J                                          | -                                           |
| 5m     | 48W            | GS60A24-P1J                                          | LPV-60-24                                   |



## Dimming / Control Options



**LT-3600**  
LED Dimmer with On-board Control



**M1+M3-3A**  
Remote Controlled Dimmer



**D1**  
Wall-mount Dimmer



**LT-811-10A**  
DMX Decoder



**Z-DM-LT-701**  
1-10V Dimmer, Compatible with Major Faceplates

## Accessories



**P1J-F1**  
Female P1J Connector



**CON-IP68-2P**  
2-Way IP68 Waterproof Connector




**222-412**  
2-Way Wire Connector

## Extrusions



Dot-free professional finish for LED Strips

Please refer to extrusion section for our full range

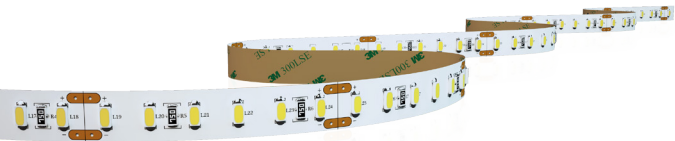

24V    14.4 W/m    3 Yrs Wty

ULTRASERIES

Specifications

|                 |                                                                 |
|-----------------|-----------------------------------------------------------------|
| Power Rating:   | 14.4W/m                                                         |
| Input Voltage:  | 24V DC                                                          |
| LED Density:    | 120 LEDs/m                                                      |
| Cutting Length: | 50mm                                                            |
| Beaming Angle:  | 120 °                                                           |
| Width           | 10mm (Non-waterproof)<br>12mm (Waterproof)                      |
| Lifetime        | 50000 hrs @ 25 °C                                               |
| Connections     | 200mm Wire<br>P1J Female Connector (only available for 5m roll) |
| Mounting        | Standard: 3M Tape<br>Waterproof: Mounting Clip                  |
| Warranty        | 3 Years                                                         |

Models

| SKU (Order Code)       | Color         | CCT   | Brightness    | IP Rating |
|------------------------|---------------|-------|---------------|-----------|
| 3014-1202400SCX-CW-[ ] | Cool White    | 6000K | 1500 Lumens/m | -         |
| 3014-1202400SCX-NW-[ ] | Natural White | 4000K | 1320 Lumens/m | -         |
| 3014-1202400SCX-WW-[ ] | Warm White    | 3000K | 1200 Lumens/m | -         |
| 3014-1202468SCX-CW-5   | Cool White    | 6000K | 1500 Lumens/m | IP68      |
| 3014-1202468SCX-NW-5   | Natural White | 4000K | 1320 Lumens/m | IP68      |
| 3014-1202468SCX-WW-5   | Warm White    | 3000K | 1200 Lumens/m | IP68      |

[ ] = 1, 2, 3, 4 or 5  
1 = 1 meter ; 2 = 2 meters ; 3 = 3 meters ; 4 = 4 meters ; 5 = 5 metres

Product Details - Non-waterproof Strips (ULTRA)



Included Accessories in 5m Pack

5 x Solder-less Connectors

Product Details - Waterproof Strips (ULTRA68)

Included Accessories in 5m Pack

# ULTRA Series - Accessories

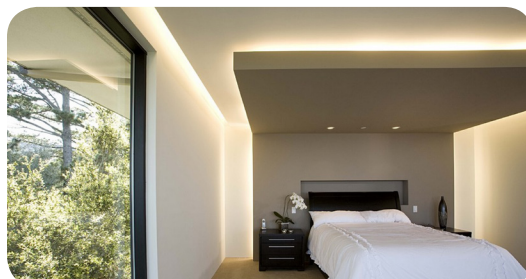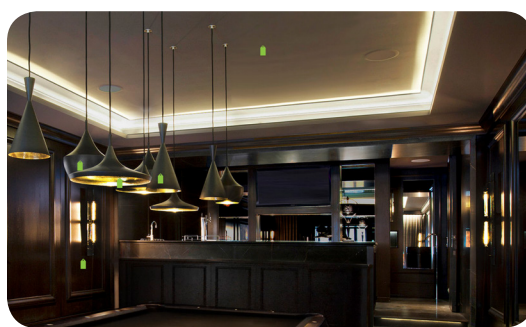

## Recommended Drivers

| Length | Power Required | SKU (Order Code)                 |                                             |
|--------|----------------|----------------------------------|---------------------------------------------|
|        |                | Power adaptor with P1J connector | Waterproof driver with bare wire connection |
| 1m     | 14.4W          | GE25A24-P1J                      | -                                           |
| 2m     | 28.8W          | GS40A24-P1J                      | -                                           |
| 3m     | 43.2W          | GS60A24-P1J                      | -                                           |
| 4m     | 57.6W          | GS60A24-P1J                      | -                                           |
| 5m     | 72W            | GS90A24-P1J                      | LPV-100-24                                  |



## Dimming / Control Options



**LT-3600**  
LED Dimmer with On-board Control



**M1+M3-3A**  
Remote Controlled Dimmer



**D1**  
Wall-mount Dimmer



**LT-811-10A**  
DMX Decoder



**Z-DM-LT-701**  
1-10V Dimmer, Compatible with Major Faceplates

## Accessories



**P1J-F1**  
Female P1J Connector



**CON-IP68-2P**  
2-Way IP68 Waterproof Connector




**222-412**  
2-Way Tool-less Wire Connector

## Extrusions



Dot-free professional finish for LED Strips

Please refer to extrusion section for our full range

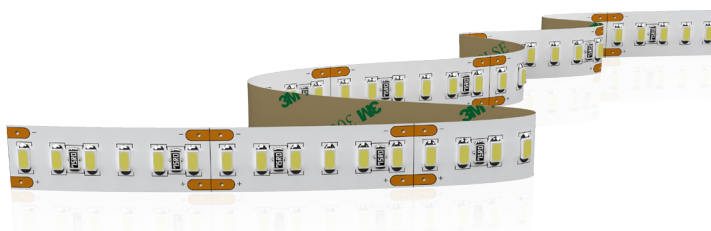

24V 24.5 W/m 3 Yrs Wty

ULTRA+ SERIES PLUS

## Specifications

|                 |                                                                 |
|-----------------|-----------------------------------------------------------------|
| Power Rating:   | 24.5W/m                                                         |
| Input Voltage:  | 24V DC                                                          |
| LED Density:    | 204 LEDs/m                                                      |
| Cutting Length: | 50mm                                                            |
| Beaming Angle:  | 120 °                                                           |
| Width           | 10mm                                                            |
| Lifetime        | 50000 hrs @ 25 °C                                               |
| Connections     | 200mm Wire<br>P1J Female Connector (only available for 5m roll) |
| Mounting        | Standard: 3M Tape                                               |
| Warranty        | 3 Years                                                         |

## Models

| SKU (Order Code)       | Color         | CCT   | Brightness    | IP Rating |
|------------------------|---------------|-------|---------------|-----------|
| 3014-2042400SCX-CW-[ ] | Cool White    | 6000K | 2100 Lumens/m | -         |
| 3014-2042400SCX-NW-[ ] | Natural White | 4000K | 1980 Lumens/m | -         |
| 3014-2042400SCX-WW-[ ] | Warm White    | 3000K | 1540 Lumens/m | -         |

[ ] = 1, 2, 3, 4 or 5

1 = 1 meter ; 2 = 2 meters ; 3 = 3 meters ; 4 = 4 meters ; 5 = 5 metres

## Product Details - Non-waterproof Strips (ULTRAP)



1. ULTRA+ Non-waterproof - 5m roll
2. 3014SMD LED chip with white PCB
3. P1J Connector (Only available in 5m roll)
4. 200mm wire connector
5. 5 x Solder-less connectors (5m pack)

## Recommended Drivers


| Length | Power Required | SKU (Order Code)<br>Power adaptor with P1J connector |
|--------|----------------|------------------------------------------------------|
| 1m     | 24.5W          | GS25A24-P1J                                          |
| 2m     | 49W            | GS40A24-P1J                                          |
| 3m     | 73.5W          | GS90A24-P1J                                          |
| 4m     | 98W            | GS120A24-P1M                                         |
| 5m     | 122.5W         | GS160A24-P1M                                         |



Mean Well  
Power Adaptor



## Dimming / Control Options

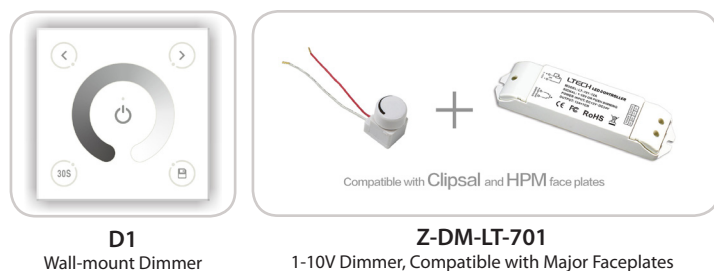

D1

Wall-mount Dimmer

Z-DM-LT-701


1-10V Dimmer, Compatible with Major Faceplates

## Extrusions



## Dot-free professional finish for LED Strips

Please refer to extrusion section for our full range

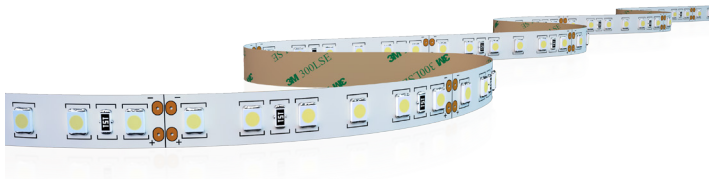

24V

28.8  
W/m

3 Yrs  
Wty

## Specifications

|                 |                                                                 |
|-----------------|-----------------------------------------------------------------|
| Power Rating:   | 28.8W/m                                                         |
| Input Voltage:  | 24V DC                                                          |
| LED Density:    | 120 LEDs/m                                                      |
| Cutting Length: | 50mm                                                            |
| Beaming Angle:  | 120 °                                                           |
| Width           | 10mm                                                            |
| Lifetime        | 50000 hrs @ 25 °C                                               |
| Connections     | 200mm Wire<br>P1J Female Connector (only available for 5m roll) |
| Mounting        | Standard: 3M Tape                                               |
| Warranty        | 3 Years                                                         |

## Models

| SKU (Order Code)w      | Color         | CCT   |  | Brightness    | IP Rating |
|------------------------|---------------|-------|--|---------------|-----------|
| 2835-1202400SCX-CW-[ ] | Cool White    | 6000K |  | 2880 Lumens/m | -         |
| 2835-1202400SCX-NW-[ ] | Natural White | 4000K |  | 2720 Lumens/m | -         |
| 2835-1202400SCX-WW-[ ] | Warm White    | 3000K |  | 2500 Lumens/m | -         |

[ ] = 1, 2, 3, 4 or 5

1 = 1 meter ; 2 = 2 meters ; 3 = 3 meters ; 4 = 4 meters ; 5 = 5 metres

## Product Details - Non-waterproof Strips (ULTIMATE)



1. ULTIMATE Non-waterproof - 5m roll
2. 2835SMD LED chip with white PCB
3. P1J Connector (Only available in 5m roll)
4. 200mm wire connector
5. 5 x Solder-less connectors (5m pack)

## Recommended Drivers

| Length | Power Required | SKU (Order Code)<br>Power adaptor with P1J connector |
|--------|----------------|------------------------------------------------------|
| 1m     | 28.8W          | GS40A24-P1J                                          |
| 2m     | 57.6W          | GS60A24-P1J                                          |
| 3m     | 86.4W          | GS90A24-P1J                                          |
| 4m     | 115.2W         | GS120A24-P1M                                         |
| 5m     | 144W           | GS160A24-P1M                                         |



Mean Well  
Power Adaptor



## Dimming / Control Options




**D1**  
Wall-mount Dimmer




**Z-DM-LT-701**  
1-10V Dimmer, Compatible with Major Faceplates

## Extrusions



## Dot-free professional finish for LED Strips

Please refer to extrusion section for our full range

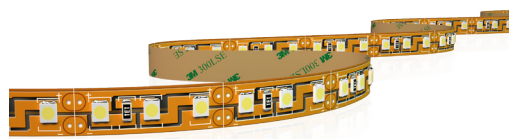

12V

14.4  
W/m

2 Yrs  
Wty



## Specifications

|                 |                                                 |
|-----------------|-------------------------------------------------|
| Power Rating:   | 14.4W/m                                         |
| Input Voltage:  | 12V DC                                          |
| LED Density:    | 60 LEDs/m                                       |
| Cutting Length: | 50mm                                            |
| Beaming Angle:  | 120 °                                           |
| Width           | 10mm (Non-waterproof)<br>12mm (Waterproof)      |
| Lifetime        | 50000 hrs @ 25 °C                               |
| Connections     | 200mm Wire                                      |
| Mounting        | Standard: 3M Tape<br>Waterproof: Mounting Clips |
| Warranty        | 2 Years                                         |




## Models

| SKU (Order Code)        | Color | IP Rating |
|-------------------------|-------|-----------|
| 5050-0601200SCX-RGB-[ ] | RGB   | -         |
| 5050-0601268SCX-RGB-5   | RGB   | IP68      |

[ ] = 1, 2, 3, 4 or 5

1 = 1 meter ; 2 = 2 meters ; 3 = 3 meters ; 4 = 4 meters ; 5 = 5 metres

## Product Details - Non-waterproof Strips (RBW)



1. RBW Non-waterproof - 5m roll
2. 5050SMD LED chip with brown PCB
3. 200mm Wire Connector
4. 5x Solder-less wire connector (5m pack)

## Product Details - Waterproof Strips (RBW68)



5. RBW68 Waterproof - 5m roll
6. 5050SMD LED chip with brown PCB
7. Male Connector - Waterproof
8. Female Connector - Waterproof
9. 20 x Mounting Clip (5m pack)
10. Female Connector (5m pack)
11. Male Connector (5m pack)
12. Silicone Glue (5m pack)
13. 2 x End Caps (5m pack)

## Recommended Drivers



| Length | Power Required | SKU (Order Code)<br>Power adaptor | Waterproof driver |
|--------|----------------|-----------------------------------|-------------------|
| 1m     | 14.4W          | GE25A12-P1J                       | -                 |
| 2m     | 28.8W          | GS40A12-P1J                       | -                 |
| 3m     | 43.2W          | GS60A12-P1J                       | -                 |
| 4m     | 57.6W          | GS60A12-P1J                       | -                 |
| 5m     | 72W            | GS90A12-P1J                       | LPV-100-12        |

## RGB Controller Options \*Required



**M3+M3-3A**  
Remote RGB Controller



**D3**  
Wall-mount RGB Controller



**WIFI-104**  
Wifi Smart RGB Controller  
iOS/Android support



24V

14.4  
W/m

2 Yrs  
Wty



## Specifications

|                        |                                                 |
|------------------------|-------------------------------------------------|
| <b>Power Rating:</b>   | 14.4W/m                                         |
| <b>Input Voltage:</b>  | 24V DC                                          |
| <b>LED Density:</b>    | 60 LEDs/m                                       |
| <b>Cutting Length:</b> | 100mm                                           |
| <b>Beaming Angle:</b>  | 120 °                                           |
| <b>Width</b>           | 11mm (Non-waterproof)<br>13mm (Waterproof)      |
| <b>Lifetime</b>        | 50000 hrs @ 25 °C                               |
| <b>Connections</b>     | 200mm Wire                                      |
| <b>Mounting</b>        | Standard: 3M Tape<br>Waterproof: Mounting Clips |
| <b>Warranty</b>        | 2 Years                                         |




## Models

| SKU (Order Code)        | Color | IP Rating |
|-------------------------|-------|-----------|
| 5050-0602400SCX-RGB-[ ] | RGB   | -         |
| 5050-0602468SCX-RGB-5   | RGB   | IP68      |

[ ] = 1, 2, 3, 4 or 5

1 = 1 meter ; 2 = 2 meters ; 3 = 3 meters ; 4 = 4 meters ; 5 = 5 metres

## Product Details - Non-waterproof Strips (RBW)



1. RBWP Non-waterproof - 5m roll
2. 5050SMD LED chip with white PCB
3. 200mm Wire Connector
4. 5x Solder-less wire connector (5m pack)

## Product Details - Waterproof Strips (RBWP68)



5. RBWP68 Waterproof - 5m roll
6. 5050SMD LED chip with white PCB
7. Male Connector - Waterproof
8. Female Connector - Waterproof
9. 20 x Mounting Clip (5m pack)
10. Female Connector (5m pack)
11. Male Connector (5m pack)
12. Silicone Glue (5m pack)
13. 2 x End Caps (5m pack)

## Recommended Drivers



| Length | Power Required | SKU (Order Code) | Power adaptor | Waterproof driver |
|--------|----------------|------------------|---------------|-------------------|
| 1m     | 14.4W          | GE25A24-P1J      | -             | -                 |
| 2m     | 28.8W          | GS40A24-P1J      | -             | -                 |
| 3m     | 43.2W          | GS60A24-P1J      | -             | -                 |
| 4m     | 57.6W          | GS60A24-P1J      | -             | -                 |
| 5m     | 72W            | GS90A24-P1J      | -             | LPV-100-24        |

## RGB Controller Options \*Required




**M3+M3-3A**  
Remote RGB Controller



**D3**  
Wall-mount RGB Controller



**WIFI-104**  
Wifi Smart RGB Controller  
iOS/Android support

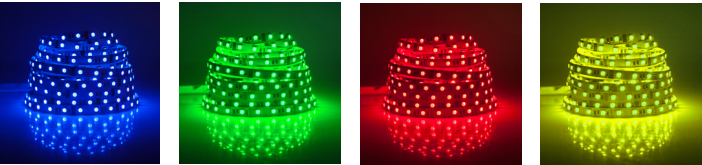

Models

| SKU                   | Color  | IP Rating |
|-----------------------|--------|-----------|
| 3528-0601200SCX-B-[ ] | Blue   | -         |
| 3528-0601200SCX-G-[ ] | Green  | -         |
| 3528-0601200SCX-R-[ ] | Red    | -         |
| 3528-0601200SCX-Y-[ ] | Yellow | -         |
| 3528-0601268SCX-B-5   | Blue   | IP68      |
| 3528-0601268SCX-G-5   | Green  | IP68      |
| 3528-0601268SCX-R-5   | Red    | IP68      |
| 3528-0601268SCX-Y-5   | Yellow | IP68      |

[ ] = 1, 2, 3, 4 or 5  
1 = 1 meter ; 2 = 2 meters ; 3 = 3 meters ; 4 = 4 meters ; 5 = 5 metres

Product Details - Non-waterproof Strips



- 1. COLOR Non-waterproof - 5m roll
- 2. 3528SMD LED chip with white PCB
- 3. P1J Connector (Only available in 5m roll)
- 4. 200mm wire connector



2



3



4

Included Accessories in 5m Roll Pack



5 x Solder-less Connectors

Product Details - Waterproof Strips



- 5. COLOR Waterproof - 5m roll
- 6. 3528SMD LED chip with white PCB
- 7. P1J Male Connector - Waterproof
- 8. P1J Female Connector - Waterproof



6



7



8

Included Accessories in 5m Roll Pack



1 x P1J Waterproof Female Connector



1 x P1J Waterproof Male Connector



20 x Mounting Clips



1 x Silicone Glue



2 x End Caps

Specifications

12V

9.6 W/m

2 Yrs Wty

|                 |                                                  |
|-----------------|--------------------------------------------------|
| Power Rating:   | 9.6W/m                                           |
| Input Voltage:  | 12V                                              |
| LED Density:    | 120 LEDs/m                                       |
| Cutting Length: | 50mm                                             |
| Beaming Angle:  | 120 °                                            |
| Width           | 8mm (Non-Waterproof)<br>12mm (Waterproof)        |
| Lifetime        | 50000 hrs @ 25 °C                                |
| Packaging       | OEM                                              |
| Connections     | <5m: 200mm Wire<br>5m Roll: P1J Female Connector |
| Mounting        | Standard: 3M Tape<br>Waterproof: Mounting Clip   |
| Warranty        | 2 Years                                          |

# COLOR Series - Accessories



## Recommended Drivers

| Length | Power Required | Recommended SKU<br>Power adaptor with P1J connector | Waterproof driver with bare wire connection |
|--------|----------------|-----------------------------------------------------|---------------------------------------------|
| 1m     | 9.6W           | GE12I12-P1J                                         | -                                           |
| 2m     | 19.2W          | GS25A12-P1J                                         | -                                           |
| 3m     | 28.8W          | GS40A12-P1J                                         | -                                           |
| 4m     | 38.4W          | GS40A12-P1J                                         | -                                           |
| 5m     | 48W            | GS60A12-P1J                                         | LPV-60-12                                   |



## Dimming / Control Options



**LT-3600**  
LED Dimmer with On-board Control



**M1+M3-3A**  
Remote Controlled Dimmer



**D1**  
Wall-mount Dimmer



**LT-811-10A**  
DMX Decoder



**Z-DM-LT-701**  
1-10V Dimmer, Compatible with Major Faceplates

## Accessories



**P1J-F1**  
Female P1J Connector




**CON-IP68-2P**  
2-Way IP68 Waterproof Connector



**222-412**  
2-Way Wire Connector

## Extrusions

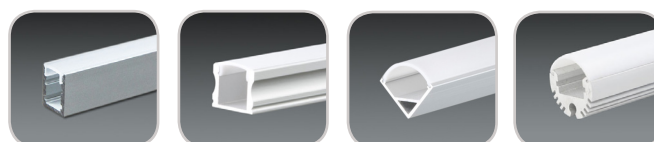

Dot-free professional finish for LED Strips

Please refer to extrusion section for our full range