



Test Report: HLG-240H-C2100

250W Single Output LED Power Supply

■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Component Stress Test

■ SAFETY & E.M.C. TEST

Safety Test

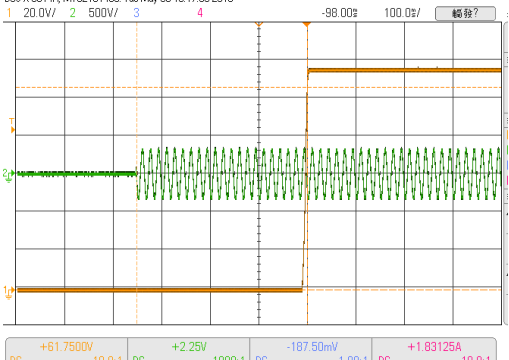
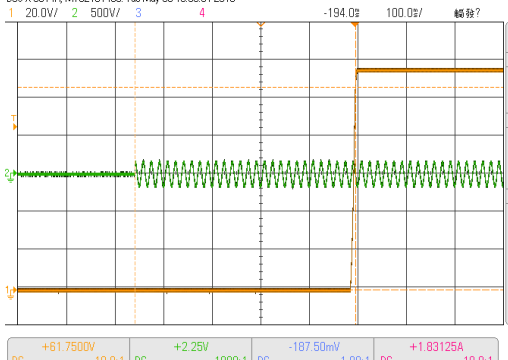
E.M.C. Test

■ RELIABILITY TEST

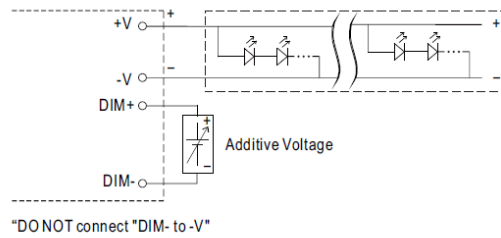
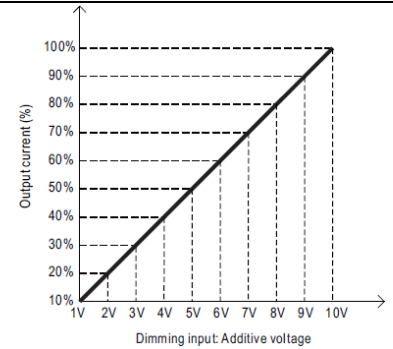
ENVIRONMENT TEST

DESIGN VERIFY TEST

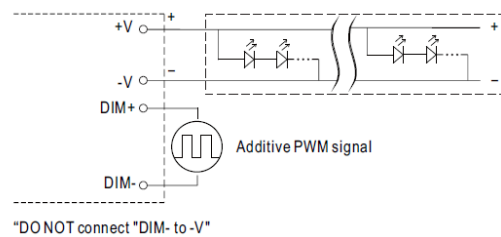
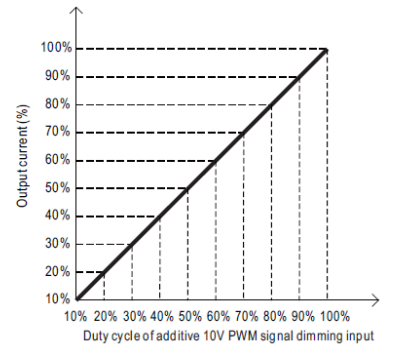
OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	CURRENT TOLERANCE	±5%	I/P: 230 VAC I/P: 115VAC O/P: FULL LOAD Ta: 25°C	2.0858A /230VAC@CV MAX-2V 2.0876A /230VAC@CV MIN 2.0854A /115VAC@CV MAX-2V 2.0869A /115VAC@CV MIN +0.695%
2	CONSTANT CURRENT REGION	CH1: 59V~ 119V	I/P: 230 VAC O/P: FULL LOAD Ta: 25°C	0V~118V /230VAC
3	OPEN CIRCUIT VOLTAGE (max.)	122V	I/P: 230 VAC O/P: NO LOAD Ta: 25°C	119.5V
4	CURRENT ADJ. RANGE	CH1: 1050mA~ 2100mA	I/P: 230 VAC I/P: 115VAC O/P: CV MIN & CV MAX-2V Ta: 25°C	806mA~ 2444mA /230VAC@CV MAX-2V 804mA~2434mA /230VAC@CV MIN 806mA~ 2445mA /115VAC@CV MAX-2V 805mA~ 2436mA /115VAC@CV MIN
5	CURRENT RIPPLE	5.0% max. @rated current	I/P: 230 VAC O/P: FULL LOAD Ta: 25°C	2.42%
6	SET UP TIME(Max)	230VAC/500 ms 115VAC/1000ms	I/P: 230 VAC I/P: 115 VAC O/P: FULL LOAD Ta: 25°C	230VAC/ 352ms 115 VAC/ 456ms
<div> <div> <p>INPUT=230VAC/50HZ @ FULL LOAD</p> <p>CH1 : AC Input Voltage CH2 : Output Voltage</p> <p>DSO-X 3014A, MY52161480, Tue May 05 13:17:59 2015</p>  <p>DC +61.7500V 10.0 1 DC +2.25V 1000.1 DC -187.50mV 1.00 1 DC +1.83125A 10.0 1</p> </div> <div> <p>INPUT=115VAC/60HZ @ FULL LOAD</p> <p>CH1 : AC Input Voltage CH2 : Output Voltage</p> <p>DSO-X 3014A, MY52161480, Tue May 05 13:38:01 2015</p>  <p>DC +61.7500V 10.0 1 DC +2.25V 1000.1 DC -187.50mV 1.00 1 DC +1.83125A 10.0 1</p> </div> </div>				
7	DIMMING OPERATION (for B-Type)	<p>※3 in 1 dimming function</p> <p>※Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM-: 1 ~ 10VDC, or 10V PWM signal or resistance.</p> <p>※Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.</p> <p>※Dimming source current from power supply: 100μ A (typ.)</p>		

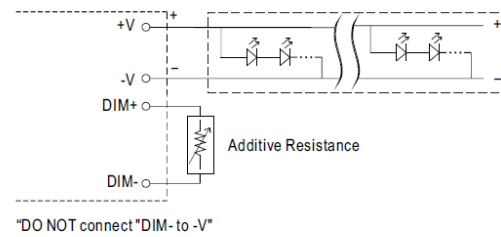
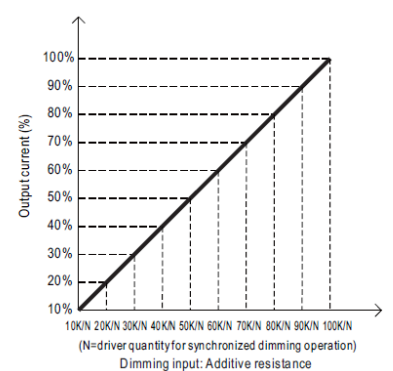
◎ Applying additive 1 ~ 10VDC



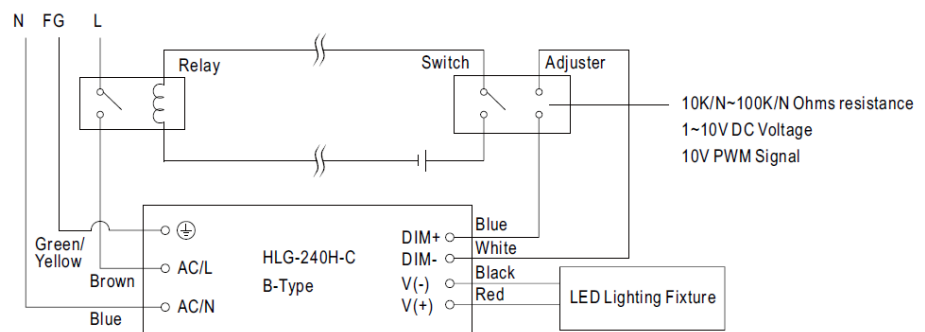
◎ Applying additive 10V PWM signal (frequency range 100Hz ~ 3KHz):



◎ Applying additive resistance:



Note: In the case of turning the lighting fixture down to 0% brightness, please refer to the configuration as follow, or please contact MEAN WELL for other options.



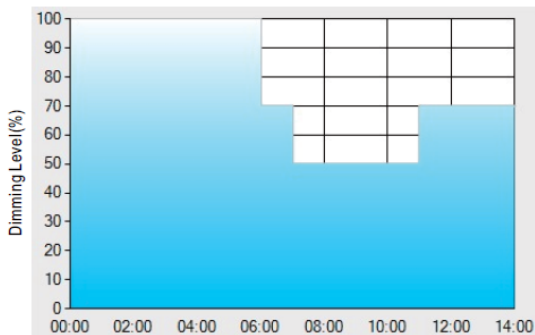
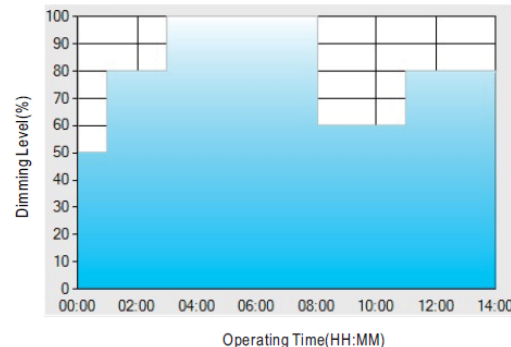
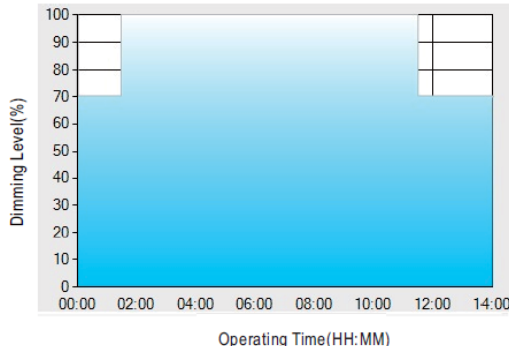
Using a switch and relay can turn ON/OFF the lighting fixture.

I/P : 230VAC

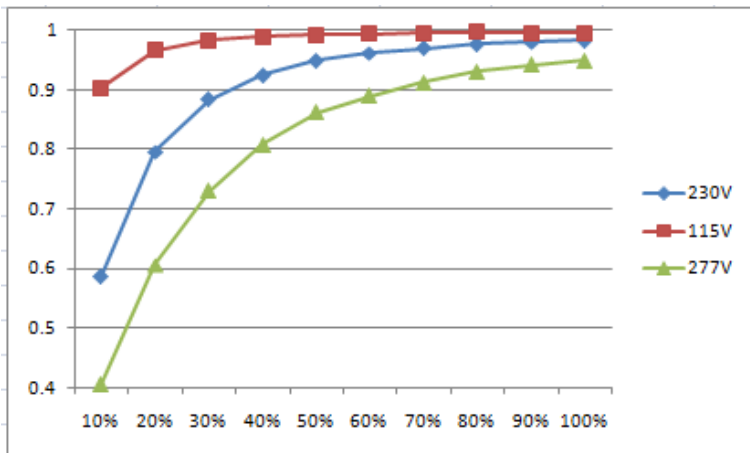
O/P : DIMMING TEST

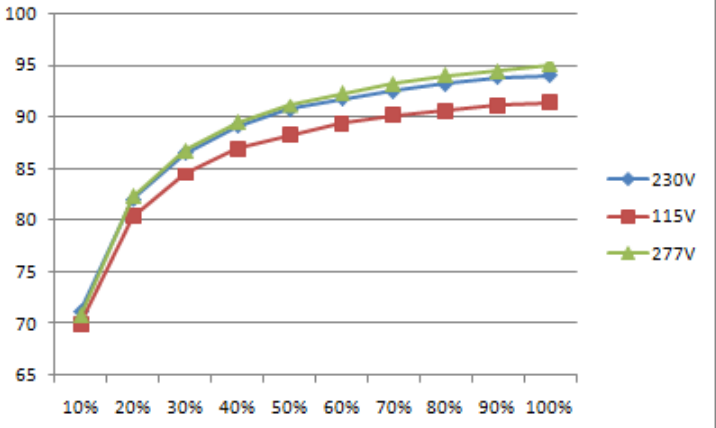
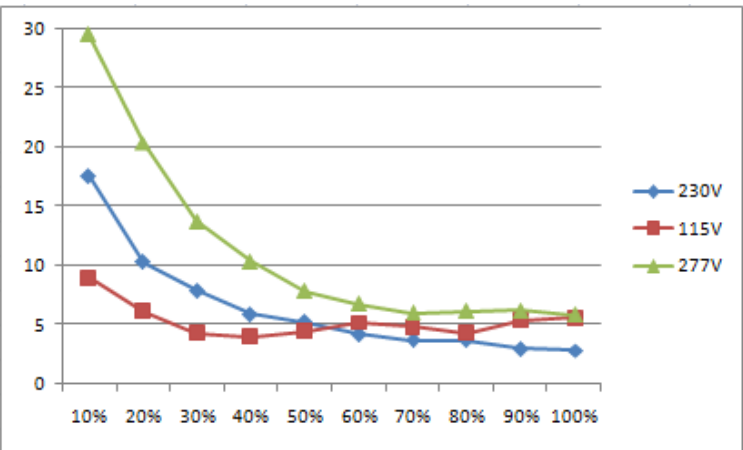
TA : 25°C

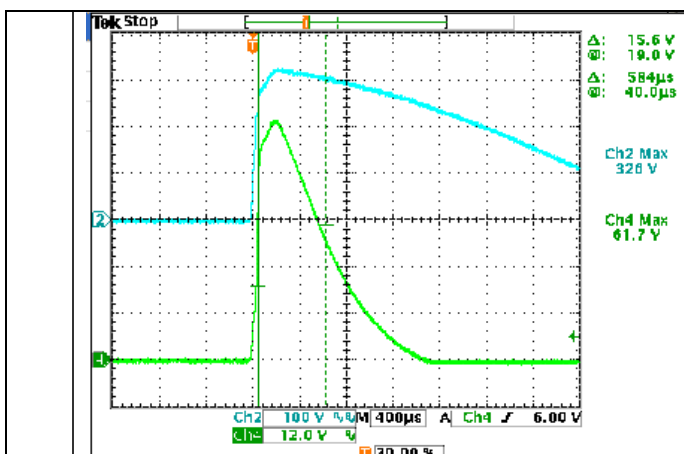
R	10K	20K	30K	40K	50K	60K	70K	80K	90K	100K	OPEN
O/P CURRENT	0.223A	0.435A	0.644A	0.855A	1.064A	1.271A	1.482A	1.684A	1.880A	2.083A	2.125A
%	10.63%	20.70%	30.67%	40.71%	50.67%	60.52%	70.57%	80.19%	89.52%	99.19%	101.19%
V	1V	2V	3V	4V	5V	6V	7V	8V	9V	10V	OPEN

		<table><tr><td>O/P CURRENT</td><td>0.226A</td><td>0.439A</td><td>0.660A</td><td>0.862A</td><td>1.078A</td><td>1.274A</td><td>1.478A</td><td>1.701A</td><td>1.908A</td><td>2.100A</td><td>2.125A</td></tr><tr><td>%</td><td>10.76%</td><td>20.90%</td><td>31.43%</td><td>41.05%</td><td>51.33%</td><td>60.67%</td><td>70.38%</td><td>81.00%</td><td>90.86%</td><td>100.00%</td><td>101.19%</td></tr><tr><td>PWM (100HZ)</td><td>10%</td><td>20%</td><td>30%</td><td>40%</td><td>50%</td><td>60%</td><td>70%</td><td>80%</td><td>90%</td><td>100%</td><td>OPEN</td></tr><tr><td>O/P CURRENT</td><td>0.203A</td><td>0.424A</td><td>0.637A</td><td>0.852A</td><td>1.064A</td><td>1.273A</td><td>1.487A</td><td>1.695A</td><td>1.907A</td><td>2.117A</td><td>2.125A</td></tr><tr><td>%</td><td>9.67%</td><td>20.19%</td><td>30.33%</td><td>40.57%</td><td>50.67%</td><td>60.62%</td><td>70.81%</td><td>80.71%</td><td>90.80%</td><td>100.81%</td><td>101.19%</td></tr></table>	O/P CURRENT	0.226A	0.439A	0.660A	0.862A	1.078A	1.274A	1.478A	1.701A	1.908A	2.100A	2.125A	%	10.76%	20.90%	31.43%	41.05%	51.33%	60.67%	70.38%	81.00%	90.86%	100.00%	101.19%	PWM (100HZ)	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	OPEN	O/P CURRENT	0.203A	0.424A	0.637A	0.852A	1.064A	1.273A	1.487A	1.695A	1.907A	2.117A	2.125A	%	9.67%	20.19%	30.33%	40.57%	50.67%	60.62%	70.81%	80.71%	90.80%	100.81%	101.19%
O/P CURRENT	0.226A	0.439A	0.660A	0.862A	1.078A	1.274A	1.478A	1.701A	1.908A	2.100A	2.125A																																																			
%	10.76%	20.90%	31.43%	41.05%	51.33%	60.67%	70.38%	81.00%	90.86%	100.00%	101.19%																																																			
PWM (100HZ)	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	OPEN																																																			
O/P CURRENT	0.203A	0.424A	0.637A	0.852A	1.064A	1.273A	1.487A	1.695A	1.907A	2.117A	2.125A																																																			
%	9.67%	20.19%	30.33%	40.57%	50.67%	60.62%	70.81%	80.71%	90.80%	100.81%	101.19%																																																			
TEST RESULT : OK																																																														
8	<div>DIMMING OPERATION (for Dxx-Type by User definition)</div>	<div>※Smart timer dimming function (for Dxx-Type by User definition)</div> <div>MEAN WELL Smart timer dimming primarily provides the adaptive proportion dimming profile for the output constant current level to perform up to 14 consecutive hours. 3 dimming profiles hereunder are defined accounting for the most frequently seen applications. If other options may be needed,please contact MEAN WELL for details.</div> <div>Ex : Ⓒ D01-Type: the profile recommended for residential lighting</div> <div><div><div><div>DimmingLevel(%)</div><div></div><div>Operating Time(HH:MM)</div></div><div>Ex: Ⓒ D02-Type: the profile recommended for street lighting</div><div><div><div>Dimming Level(%)</div><div></div><div>Operating Time(HH:MM)</div></div><div>Ex: Ⓒ D03-Type: the profile recommended for tunnel lighting</div><div><div><div>Dimming Level(%)</div><div></div><div>Operating Time(HH:MM)</div></div></div><div><div>Set up for D01-Type in Smart timer dimming software program:</div><table><tr><td></td><td>T1</td><td>T2</td><td>T3</td><td>T4</td></tr><tr><td>TIME**</td><td>06:00</td><td>07:00</td><td>11:00</td><td>--</td></tr><tr><td>LEVEL**</td><td>100%</td><td>70%</td><td>50%</td><td>70%</td></tr></table></div><div><div>Set up for D02-Type in Smart timer dimming software program:</div><table><tr><td></td><td>T1</td><td>T2</td><td>T3</td><td>T4</td><td>T5</td></tr><tr><td>TIME**</td><td>01:00</td><td>03:00</td><td>8:00</td><td>11:00</td><td>--</td></tr><tr><td>LEVEL**</td><td>50%</td><td>80%</td><td>100%</td><td>60%</td><td>80%</td></tr></table></div><div><div>Set up for D03-Type in Smart timer dimming software program:</div><table><tr><td></td><td>T1</td><td>T2</td><td>T3</td></tr><tr><td>TIME**</td><td>01:30</td><td>11:00</td><td>---</td></tr><tr><td>LEVEL**</td><td>70%</td><td>100%</td><td>70%</td></tr></table></div></div><div><div>I/P : 230VAC</div><div>O/P : DIMMING TEST</div><div>TA : 25℃</div><div>TEST RESULT : OK</div></div></div></div>		T1	T2	T3	T4	TIME**	06:00	07:00	11:00	--	LEVEL**	100%	70%	50%	70%		T1	T2	T3	T4	T5	TIME**	01:00	03:00	8:00	11:00	--	LEVEL**	50%	80%	100%	60%	80%		T1	T2	T3	TIME**	01:30	11:00	---	LEVEL**	70%	100%	70%															
	T1	T2	T3	T4																																																										
TIME**	06:00	07:00	11:00	--																																																										
LEVEL**	100%	70%	50%	70%																																																										
	T1	T2	T3	T4	T5																																																									
TIME**	01:00	03:00	8:00	11:00	--																																																									
LEVEL**	50%	80%	100%	60%	80%																																																									
	T1	T2	T3																																																											
TIME**	01:30	11:00	---																																																											
LEVEL**	70%	100%	70%																																																											

INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																								
1	INPUT VOLTAGE RANGE	90VAC~305 VAC	I/P:TESTING O/P:FULL LOAD Ta:25℃	70V~305V																																								
			I/P: (1)LOW-LINE-3V=87 V HIGH-LINE+10V=315 V O/P:FULL/MIN LOAD (PLEASE CHECK DERATING CURVE) ON: 30 Sec . OFF: 30 Sec 10MIN (POWER ON/OFF NO DAMAGE) (2) I/P:230Vac ON: 0.5 Sec . OFF: 0.5 Sec 20MIN	(1).TEST:OK (2).TEST :OK																																								
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE	I/P: 100 VAC ~305VAC O/P:FULL~MIN LOAD Ta:25℃	OK																																								
3	INPUT CURRENT (TYP)	277VAC/ 1.1 A 230 VAC/ 1.3 A 115 VAC/ 2.5 A	I/P: 277VAC/230 VAC/115 VAC O/P:FULL LOAD Ta:25℃	I= 0.987A/277VAC I = 1.17A/ 230VAC I =2.42A/ 115VAC																																								
4	POWER FACTOR(TYP)	0.95/230 VAC FULL LOAD 0.98/115 VAC FULL LOAD 0.92/277 VAC FULL LOAD	I/P: 230 VAC/115VAC/277VAC O/P:FULL LOAD Ta:25℃	PF= 0.983/230V/100%LOAD PF=0.994/115V/100%LOAD PF= 0.944/277V/100%LOAD																																								
				<div><p>P.F vs LOAD</p><table><caption>P.F vs LOAD Data</caption><thead><tr><th>Load (%)</th><th>230V P.F</th><th>115V P.F</th><th>277V P.F</th></tr></thead><tbody><tr><td>10%</td><td>0.58</td><td>0.90</td><td>0.40</td></tr><tr><td>20%</td><td>0.78</td><td>0.95</td><td>0.60</td></tr><tr><td>30%</td><td>0.88</td><td>0.98</td><td>0.75</td></tr><tr><td>40%</td><td>0.92</td><td>0.99</td><td>0.82</td></tr><tr><td>50%</td><td>0.95</td><td>1.00</td><td>0.88</td></tr><tr><td>60%</td><td>0.96</td><td>1.00</td><td>0.90</td></tr><tr><td>70%</td><td>0.97</td><td>1.00</td><td>0.92</td></tr><tr><td>80%</td><td>0.98</td><td>1.00</td><td>0.94</td></tr><tr><td>90%</td><td>0.98</td><td>1.00</td><td>0.95</td></tr><tr><td>100%</td><td>0.98</td><td>1.00</td><td>0.95</td></tr></tbody></table></div>	Load (%)	230V P.F	115V P.F	277V P.F	10%	0.58	0.90	0.40	20%	0.78	0.95	0.60	30%	0.88	0.98	0.75	40%	0.92	0.99	0.82	50%	0.95	1.00	0.88	60%	0.96	1.00	0.90	70%	0.97	1.00	0.92	80%	0.98	1.00	0.94	90%	0.98	1.00	0.95
Load (%)	230V P.F	115V P.F	277V P.F																																									
10%	0.58	0.90	0.40																																									
20%	0.78	0.95	0.60																																									
30%	0.88	0.98	0.75																																									
40%	0.92	0.99	0.82																																									
50%	0.95	1.00	0.88																																									
60%	0.96	1.00	0.90																																									
70%	0.97	1.00	0.92																																									
80%	0.98	1.00	0.94																																									
90%	0.98	1.00	0.95																																									
100%	0.98	1.00	0.95																																									
5	EFFICIENCY (TYP)	93.5%	I/P: 230 VAC O/P:FULL LOAD Ta:25℃	94.22%																																								
			EFFICIENCY vs LOAD																																									

				
6	TOTAL HARMONIC DISTORTION	<p>Total harmonic distortion will be lower than 20% when output loading is 50% or higher at 230VAC / 115VAC</p> <p>Total harmonic distortion will be lower than 20% when output loading is 75% or higher at 277VAC</p>	<p>I/P : 230VAC I/P : 115VAC O/P : 50% LOAD Ta : 25°C</p> <p>I/P : 277VAC O/P : 75% LOAD Ta : 25°C</p>	<p>THD : 5.19 % THD : 4.34 %</p> <p>THD : 6.83 %</p>
			<p>THD&LOAD</p> 	
7	INRUSH CURRENT (TYP)	<p>230 V/ 75A COLD START</p> <p>(twid=700us measured at 50% Ipeak) COLD START</p>	<p>I/P: 230 VAC O/P:FULL LOAD Ta:25°C</p>	<p>I= 61.7A/ 230VAC</p> <p>T50= 584 us</p>
	<p>INPUT=230VAC/50HZ @ FULL LOAD CH2 : AC Input Voltage CH4 : Input current (1V=1A)</p>			



ROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER VOLTAGE PROTECTION	V1: 125V~ 137V	I/P: 305VAC I/P: 230VAC I/P: 90VAC O/P: MIN LOAD Ta: 25°C	130.59V/ 305VAC 130.64V/ 230VAC 130.73V/ 90VAC PROTECTION TYPE : Shut down and latch off o/p voltage, re-power on to recover
2	OVER TEMPERATURE PROTECTION	PROTECTION TYPE : Shut down o/p voltage, recovers automatically after temperature goes down	I/P: 305 VAC I/P: 90 VAC O/P: FULL LOAD	O.T.P. Active PROTECTION TYPE : Shut down o/p voltage, recovers automatically after temperature goes down
3	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 305VAC I/P: 90 VAC O/P: FULL LOAD Ta: 25°C	NO DAMAGE PROTECTION TYPE : Constant current limiting, recovers automatically after fault condition is removed

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	P.F.C Transistor (D to S) or (C to E) Peak Voltage	Q1 Rated 600V/19A	I/P:High-Line +3V =308V AC ON/OFF VDS: O/P: (1)Full Load (2)Output Short (3)FULL LOAD CONTINUE I/P:Low-Line -3V = 107V AC ON/OFF VDS O/P: (1)Full Load (2)Output Short (3)FULL LOAD CONTINUE Ta:25°C	VDS: (1)514V (2)461V (3)518V VDS: (1)506V (2)498V (3)502V
2	PWM Transistor (D to S) or (C to E) Peak Voltage	Q3 Rated 20A/600V	I/P:High-Line +3V =308V AC ON/OFF VDS: O/P: (1)Full Load (2)Output Short (3)FULL LOAD CONTINUE I/P:Low-Line -3V = 107V AC ON/OFF VDS O/P: (1)Full Load (2)Output Short (3)FULL LOAD CONTINUE Ta:25°C	VDS: (1)510V (2)494V (3)470V VDS: (1)449V (2)478V (3)478V
3	Diode Peak Voltage	D102 Rated 20A/300V D103 Rated 20A/300V	I/P:High-Line +3V = 308 V AC ON/OFF VDS: O/P: (1)Full Load (2)Output Short (3)FULL LOAD CONTINUE VDS: (1)Full Load (2)Output Short (3)FULL LOAD CONTINUE Ta:25°C	D102: VDS: (1)277V (2)25.5V (3)276V D103: VDS: (1)286V (2)34.6V (3)275V
4	Input Capacitor Voltage	C5 Rated: 150u/450V SURGE POWER :495V	I/P:High-Line +3V =308 V O/P: (1)Full Load input on/off (2) Min load input on /Off (3)Full Load /Min load Change Ta:25°C	(1)475V (2)459V (3) 446V
5	Control IC Voltage Test	PWM IC U70 Rated 8.85V~16V	I/P:High-Line +3V =308 V AC ON/OFF O/P:(1)FULL LOAD (2) Output Short (3)O.L.P (4)O.V.P. (5)NO (LOW LINE) Ta:25°C	(1) 15.7V (2) 15.3V (3) 15.3V (4) 15.3V (5) 13.5V

SAFETY & EMC TEST

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	IEC60950-1 I/P-O/P: 3.75KVAC/min I/P-FG: 2 KVAC/min<4.5mA O/P-FG:1.5KVAC/min	I/P-O/P: 4.125 KVAC/min I/P-FG: 2.4 KVAC/min O/P-FG: 1.8 KVAC/min Ta:25°C	I/P-O/P: 3.87mA I/P-FG: 3.83mA O/P-FG: 3.18mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P:500VDC>100MΩ I/P-FG: 500VDC>100MΩ O/P-FG:500VDC>100MΩ	I/P-O/P: 500 VDC I/P-FG: 500 VDC O/P-FG: 500 VDC Ta:25°C	I/P-O/P: 30GΩ I/P-FG: 22G Ω O/P-FG: 30G Ω NO DAMAGE
3	GROUNDING CONTINUITY	IEC60950-1 FG(PE) TO CHASSIS OR TRACE < 100 mΩ	40A / 2min Ta:25°C	30mΩ
4	LEAKAGE CURRENT	IEC60950-1 < 0.75mA / 277VAC	I/P: 277 VAC O/P:Min LOAD Ta:25°C	L-FG:0.32 mA N-FG:0.32mA

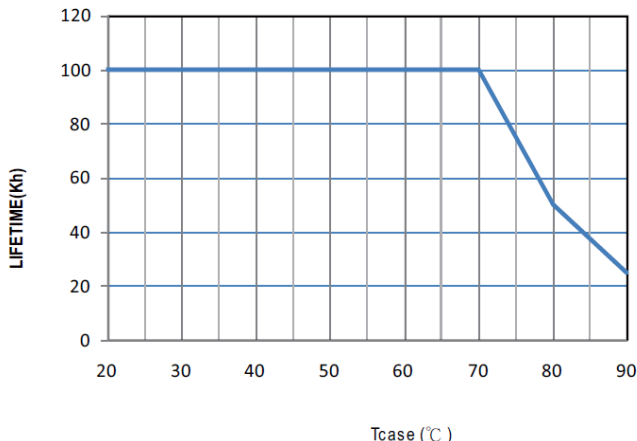
E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 CLASS A CLASS C	I/P: 230VAC/50HZ O/P: FULL LOAD Ta:25°C	PASS
2	CONDUCTION	EN55015 CLASS B	I/P: 230 VAC (50HZ) O/P:FULL/50% LOAD Ta:25°C	PASS Test by certified Lab
3	RADIATION	EN55015 CLASS B	I/P: 230 VAC (50HZ) O/P:FULL LOAD Ta:25°C	PASS Test by certified Lab
4	E.S.D	EN61000-4-2 LIGHT INDUSTRY AIR:8KV / Contact:4KV	I/P: 230 VAC/50HZ O/P:FULL LOAD Ta:25°C	CRITERIA A
5	E.F.T	EN61000-4-4 INDUSTRY INPUT: 2KV	I/P: 230 VAC/50HZ O/P:FULL LOAD Ta:25°C	CRITERIA A
6	SURGE	IEC61000-4-5 INDUSTRY L-N :2KV L,N-PE:4KV	I/P: 230 VAC/50HZ O/P:FULL LOAD Ta:25°C	CRITERIA A
7	Test by certified Lab & Test Report Prepare			

RELIABILITY TEST

ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																																																																
1	TEMPERATURE RISE TEST	<div>MODEL : HLG-240H-C1400</div> <div>1. ROOM AMBIENT BURN-IN : 3 HRS</div> <div>I/P : 230VAC O/P : FULL LOAD Ta= 29.2 °C</div> <div>2. HIGH AMBIENT BURN-IN : 6 HRS</div> <div>I/P : 230VAC O/P : FULL LOAD Ta= 55.7 °C</div> <table><thead><tr><th>NO</th><th>Position</th><th>ROOM AMBIENT</th><th>HIGH AMBIENT</th></tr></thead><tbody><tr><td>1</td><td>BD1</td><td>71.7°C</td><td>94.1°C</td></tr><tr><td>2</td><td>C14</td><td>69.7°C</td><td>92.2°C</td></tr><tr><td>3</td><td>LF2</td><td>67.8°C</td><td>89.8°C</td></tr><tr><td>4</td><td>Q1</td><td>71.3°C</td><td>94.1°C</td></tr><tr><td>5</td><td>D3</td><td>713.0°C</td><td>93.9°C</td></tr><tr><td>6</td><td>L2</td><td>70.1°C</td><td>92.4°C</td></tr><tr><td>7</td><td>L1</td><td>71.9°C</td><td>94.1°C</td></tr><tr><td>8</td><td>D2</td><td>71.0°C</td><td>93.5°C</td></tr><tr><td>9</td><td>TSW1</td><td>68.6°C</td><td>90.9°C</td></tr><tr><td>10</td><td>Q3</td><td>70.1°C</td><td>92.4°C</td></tr><tr><td>11</td><td>C5</td><td>67.3°C</td><td>89.8°C</td></tr><tr><td>12</td><td>C35</td><td>70.0°C</td><td>92.6°C</td></tr><tr><td>13</td><td>C37</td><td>70.0°C</td><td>92.6°C</td></tr><tr><td>14</td><td>D102</td><td>72.2°C</td><td>94.4°C</td></tr><tr><td>15</td><td>T1</td><td>90.3°C</td><td>111.5°C</td></tr><tr><td>16</td><td>C201</td><td>70.9°C</td><td>93.2°C</td></tr><tr><td>17</td><td>C102</td><td>69.4°C</td><td>91.8°C</td></tr><tr><td>18</td><td>U1</td><td>69.3°C</td><td>91.6°C</td></tr><tr><td>19</td><td>U201</td><td>74.3°C</td><td>96.8°C</td></tr></tbody></table>			NO	Position	ROOM AMBIENT	HIGH AMBIENT	1	BD1	71.7°C	94.1°C	2	C14	69.7°C	92.2°C	3	LF2	67.8°C	89.8°C	4	Q1	71.3°C	94.1°C	5	D3	713.0°C	93.9°C	6	L2	70.1°C	92.4°C	7	L1	71.9°C	94.1°C	8	D2	71.0°C	93.5°C	9	TSW1	68.6°C	90.9°C	10	Q3	70.1°C	92.4°C	11	C5	67.3°C	89.8°C	12	C35	70.0°C	92.6°C	13	C37	70.0°C	92.6°C	14	D102	72.2°C	94.4°C	15	T1	90.3°C	111.5°C	16	C201	70.9°C	93.2°C	17	C102	69.4°C	91.8°C	18	U1	69.3°C	91.6°C	19	U201	74.3°C	96.8°C
NO	Position	ROOM AMBIENT	HIGH AMBIENT																																																																																	
1	BD1	71.7°C	94.1°C																																																																																	
2	C14	69.7°C	92.2°C																																																																																	
3	LF2	67.8°C	89.8°C																																																																																	
4	Q1	71.3°C	94.1°C																																																																																	
5	D3	713.0°C	93.9°C																																																																																	
6	L2	70.1°C	92.4°C																																																																																	
7	L1	71.9°C	94.1°C																																																																																	
8	D2	71.0°C	93.5°C																																																																																	
9	TSW1	68.6°C	90.9°C																																																																																	
10	Q3	70.1°C	92.4°C																																																																																	
11	C5	67.3°C	89.8°C																																																																																	
12	C35	70.0°C	92.6°C																																																																																	
13	C37	70.0°C	92.6°C																																																																																	
14	D102	72.2°C	94.4°C																																																																																	
15	T1	90.3°C	111.5°C																																																																																	
16	C201	70.9°C	93.2°C																																																																																	
17	C102	69.4°C	91.8°C																																																																																	
18	U1	69.3°C	91.6°C																																																																																	
19	U201	74.3°C	96.8°C																																																																																	
	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P : 305VAC/110VAC O/P : 100 % LOAD Ta= -40°C	TEST : OK																																																																																
	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 60 °C NO DAMAGE	I/P : 305 VAC O/P : FULL LOAD Ta= 60 °C HUMIDITY= 95 %R.H	TEST : OK																																																																																
	TEMPERATURE COEFFICIENT	± 0.03 %/°C (0~60°C)	I/P : 230 VAC O/P : FULL LOAD	± 0.022 %/°C (0~60°C)																																																																																
6	STORAGE TEMPERATURE TEST	1. Thermal shock Temperature : -45°C~ +90°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 5 CYCLE 5. Input/Output condition : STATIC		OK																																																																																

7	THERMAL SHOCK TEST	1. Thermal shock Temperature : -45°C ~ +65°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 10 CYCLE 5. Input/Output condition : 230VAC/Full Load AC ON/OFF TEST turn on 58sec ; turn off 2sec	OK
8	VIBRATION TEST	1 Carton & 1 Set (1) Waveform : Sine Wave (2) Frequency : 10~500Hz (3) Sweep Time : 12min/sweep cycle (4) Acceleration : 5G (5) Test Time : 72min in each axis (X.Y.Z) (6) Ta : 25°C	TEST : OK
9	CAPACITOR LIFE CYCLE	HLG-240H-C1400 : SUPPOSE C102 IS THE MOST CRITICAL COMPONENT (1) I/P : 230VAC O/P : FULL LOAD Ta= 25 °C LIFE TIME (2) I/P : 230VAC O/P : FULL LOAD Ta= 60 °C LIFE TIME (3) I/P : 230VAC O/P : 75% LOAD Ta= 60 °C LIFE TIME (4) I/P : 230VAC O/P : 50% LOAD Ta= 60 °C LIFE TIME	(1) 436254 HRS (2) 43683 HRS (3) 61824 HRS (4) 62561 HRS
10	MTBF	Conducted by Parts Stress Analysis Prediction 180K hrs min. MIL-HDBK-217F (25°C)	
11	DMTBF/Accelerated Life Test	Demonstration Mean Time Between Failure(Expected Life) : 62,000 hours @ Tcase 75°C 	

12.10.30 A50-F031

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	DANIEL GAO	SANFORD SU	VINCENT TSENG