ARKÉ: 1P NO 10A push button 2M white

19008.2.B

Wiring devices / Traditional wiring devices / ARKÉ / Devices



1P NO 10A push button 2M white

1P NO 10 A 250 V~ push button, lightable, replaceable button, white - 2 modules

Product Status

3 - Active

Minimum order quantity

20 NR

Gallery












Drawings

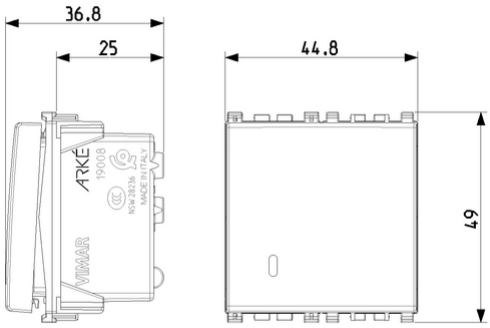

Space view

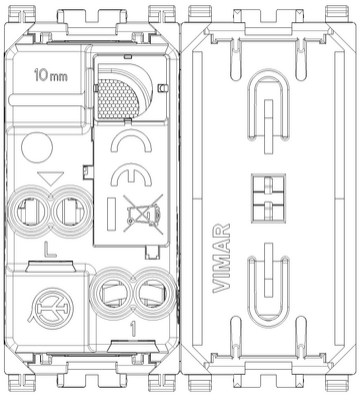

Backside view

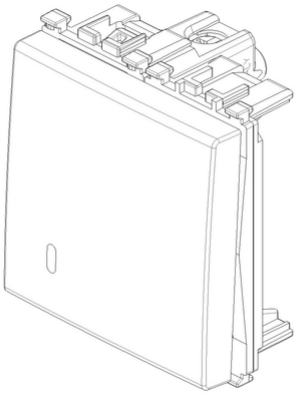

3D View

Certifications

- **00. CE Marking - EU**
- **01. IMQ - Italy (download)**
- **11. SNI-SUCOFINDO Indonesia**
- **14. TSE - Turkey (download)**
- **15. CCC - China (download)**
- **19. NOM - Mexico**
- **26. SASO - Saudi Arabia (download)**
- **31. TISI - Thailand**
- **35. RCM - Australia**
- **36. ISI - India**
- **37. Marking - Morocco**
- **92. RoHS UAE**
- **96. Electrotechnical expert (download)**
- **99. WEEE Directive (download)**

Technical data

Class group: Domestic switching devices

Class: Push button

Assembly arrangement: Modular device for domestic switching devices

Model: Single push button

Operating method: Push button

Number of rockers: 1

Number of modules (module system): 200

Number of poles: 1

Nominal voltage: 250 V

Rated current: 10,00 A

With lighting: Yes

Monitoring contact: No

Mounting method: Built-in

Type of fastening: Engage (snap)

Material: Plastic

Material quality: Thermoplastic

Halogen free: Yes

Surface protection: Untreated

Surface finishing: Matt

Colour: White

RAL-number (similar): 9016

Transparent: No

Label space/information surface: Yes

Suitable for degree of protection (IP): IP40

Device width: 44,80 mm

Device height: 49,00 mm

Device depth: 36,90 mm

Packaging



8007352454538

Qtà	1 NR
Dim	5.1x4.3x5.3 [cm]
Weight	34 [g]



8007352454545

Qtà	20 NR
Dim	26.9x11.6x9 [cm]
Weight	760.8 [g]

Legal

Vimar reserves the right to change at any time and without notice the characteristics of the products reported.Installation should be carried out by qualified staff in compliance with the current regulations regarding the installation of electrical equipment in the country where the products are installed.For the terms of use of the information on the product info sheet see Condizioni di utilizzo.