ARKÉ: Universal MASTER dimmer 230V Metal



19135.1.M

Wiring devices / Traditional wiring devices / ARKÉ / Devices

Universal MASTER dimmer 230V Metal

Universal-dimmer 230 V~ 50 Hz, phase-cutting, for: 40-300 W incandescent lamps, 40-300 VA electronic transfomers, 10-200 W CFL lamps, 3-200 W LED lamps, LED phase-cutting electronic transfomers, ON/OFF control and built-in or from NO peripheral push buttons regulation, MASTER function for 19137, minimum brightness regulation, visible in darkness, Metal. Not for Isoset enclosures

Product Status

3 - Active

Minimum order quantity

10 NR

Sheets, Manuals, Documentation


- Full multilanguage instructions sheet (973 kb)
- Light multilanguage instructions sheet (1019 kb)

Gallery







Drawings

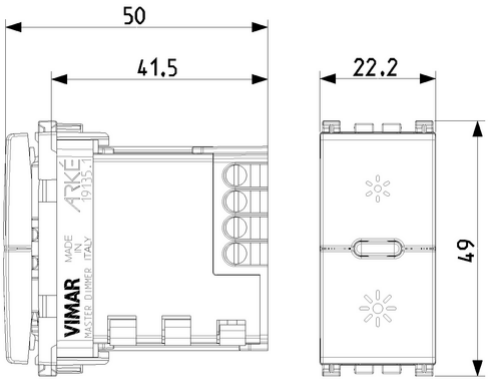

Space view

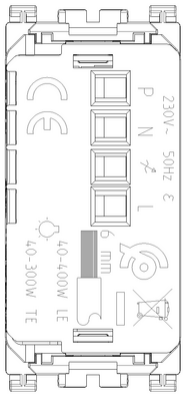

Backside view

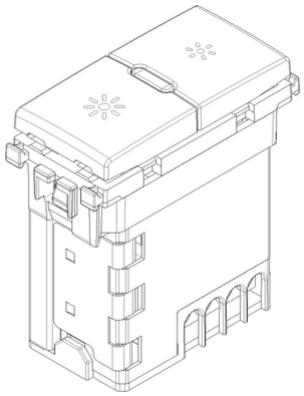

3D View

Certifications

- **00. CE Marking - EU**
- **01. IMQ - Italy (download)**
- **31. TISI - Thailand**
- **37. Marking - Morocco**
- **92. RoHS UAE**
- **96. Electrotechnical expert (download)**
- **99. WEEE Directive (download)**

Technical data

Class group: Domestic switching devices

Class: Dimmer

Operating method: Turn button

Mounting method: Flush-mounted

Material: Plastic

Material quality: Thermoplastic

Surface protection: Lacquered

Surface finishing: Matt

Colour: Aluminium

RAL-number (similar): 9007

Transparent: No

Nominal voltage: 230,00 - 230,01 V

Connection type: Screwed terminal

Device width: 22,20 mm

Device height: 49,00 mm

Device depth: 50,00 mm

Packaging



8007352594180

Qtà	1 NR
Dim	5.1x4.3x5.3 [cm]
Weight	54.6 [g]



8007352594197

Qtà	10 NR
Dim	26.9x11.6x4.9 [cm]
Weight	608 [g]

Legal

Vimar reserves the right to change at any time and without notice the characteristics of the products reported.Installation should be carried out by qualified staff in compliance with the current regulations regarding the installation of electrical equipment in the country where the products are installed.For the terms of use of the information on the product info sheet see Condizioni di utilizzo.