EIKON: 1P 10AX 2-way switch Vintage bronze

22004.12

Wiring devices / Traditional wiring devices / EIKON / Devices



1P 10AX 2-way switch Vintage bronze

1P 10AX 2-way switch Vintage bronze. Max 100 W for self-ballasted lamps (IEC 60669-1:2017)


Product Status

3 - Active


Minimum order quantity

10 NR


Drawings

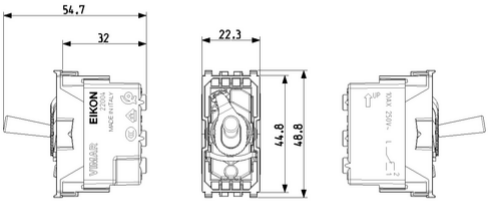

Space view

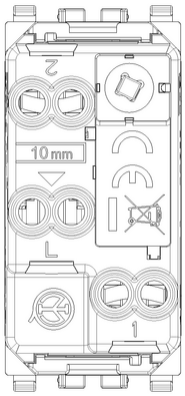

Backside view

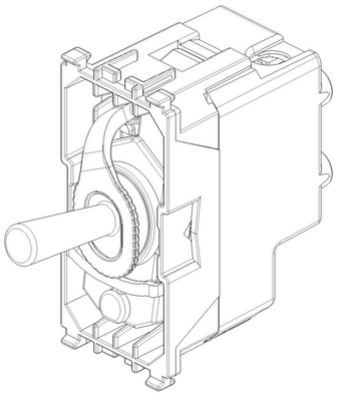

3D View

Certifications

- **00. CE Marking - EU**
- **01. IMQ - Italy (download)**
- **09. VDE - Germany (download)**
- **11. SNI-SUCOFINDO Indonesia**
- **15. CCC - China (download)**
- **19. NOM - Mexico**
- **20. IQC - Argentina**
- **23. INMETRO - Brazil (download)**
- **36. ISI - India**
- **37. Marking - Morocco**
- **92. RoHS UAE**
- **96. Electrotechnical expert (download)**
- **99. WEEE Directive (download)**

Technical data

Class group: Domestic switching devices

Class: Installation switch

Wiring system: Two-way switch

Operating method: Other

Assembly arrangement: Modular device for domestic switching devices

Number of modules (module system): 1

Push button switch: Yes

Number of rockers: 1

Mounting method: Flush-mounted

Type of fastening: Engage (snap)

With mounting plate: No

Material: Plastic

Material quality: Other

Surface protection: Lacquered

Surface finishing: Glossy

Colour: Bronze

RAL-number (similar): 7008

Label space/information surface: Yes

Lighting: No

Function lighting: Control and orientation

Type of lighting: Other

Nominal voltage: 250 V

Rated current: 10,00 A

Monitoring contact: No

Connection type: Screwed terminal

Washing machine switch: No

Device width: 22,30 mm

Device height: 48,80 mm

Device depth: 54,70 mm

Built-in depth: 32,00 mm

Packaging



8007352620766

Qtà	1 NR
Dim	5.1x6.5x2.7 [cm]
Weight	33.3 [g]



8007352620773

Qtà	10 NR
Dim	14.5x11x7.4 [cm]
Weight	380.5 [g]

Legal

Vimar reserves the right to change at any time and without notice the characteristics of the products reported.Installation should be carried out by qualified staff in compliance with the current regulations regarding the installation of electrical equipment in the country where the products are installed.For the terms of use of the information on the product info sheet see Conditions of Use.