ARKÉ: 2P+E 15A Australian SICURY outlet white

19262.B

Wiring devices / Traditional wiring devices / ARKÉ / Devices



2P+E 15A Australian SICURY outlet white

2P+E 15 A 250 V~ SICURY socket outlet, Australian standard, white - 2 modules


Product Status

3 - Active


Minimum order quantity

20 NR


Drawings

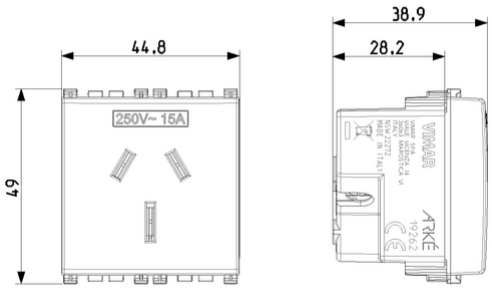

Space view

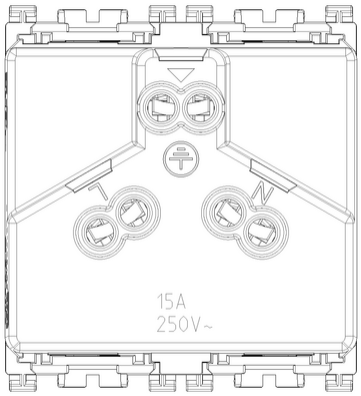

Backside view

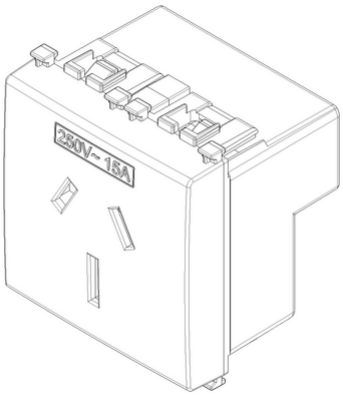

3D View

Certifications

- **00. CE Marking - EU**
- **35. RCM - Australia**
- **37. Marking - Morocco**
- **96. Electrotechnical expert (download)**
- **99. WEEE Directive (download)**

Technical data

Class group: Domestic switching devices

Class: Socket outlet

Model: Australian standard AS/NZS 3112 (type I)

Number of socket outlets: 1

Number of modules (module system): 2

Number of socket outlets switchable: 0

Imprint/indication: None

Connection type: Screwed terminal

With hinged lid: No

With enhanced contact protection: Yes

Label space/information surface: Yes

Colour: White

RAL-number (similar): 9016

Metallic colour: No

Transparent: No

Lockable: No

Eject-mechanism: No

Insulated mounting: No

With function lighting: No

With orientation lighting: No

Overvoltage protection: No

Fault current protection: No

Mounting method: Flush-mounted

Material: Plastic

Material quality: Thermoplastic

Halogen free: Yes

Surface protection: Untreated

Surface finishing: Matt

With loop through function: No

With on/off switch: No

Rotated central insert: No

Nominal current: 15 A

Nominal voltage: 250 V

Frequency: 50,00 - 60,00 HZ

Suitable for degree of protection (IP): IP20

Impact strength: Other

Device width: 44,70 mm

Device height: 49,00 mm

Device depth: 38,90 mm

Packaging

8007352573239

Qtà	1 NR
Dim	5.1x4.3x5.3 [cm]
Weight	44.8 [g]

8007352573246

Qtà	20 NR
Dim	26.9x11.6x9 [cm]
Weight	971 [g]

Legal

Vimar reserves the right to change at any time and without notice the characteristics of the products reported.Installation should be carried out by qualified staff in compliance with the current regulations regarding the installation of electrical equipment in the country where the products are installed.For the terms of use of the information on the product info sheet see Conditions of Use.