
ARKÉ: 1P NO 10A push-button 2M Metal

19008.2.M

Wiring devices / Traditional wiring devices / ARKÉ / Devices

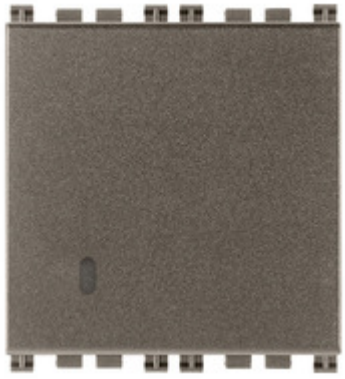

1P NO 10A push-button 2M Metal

1P NO 10 A 250 V~ push button, lightable, replaceable button, Metal - 2 modules


Product Status

3 - Active


Minimum order quantity

20 NR


Drawings

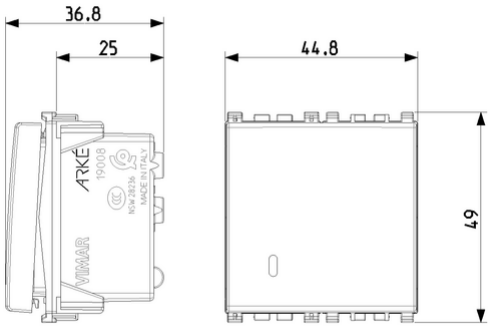

Space view

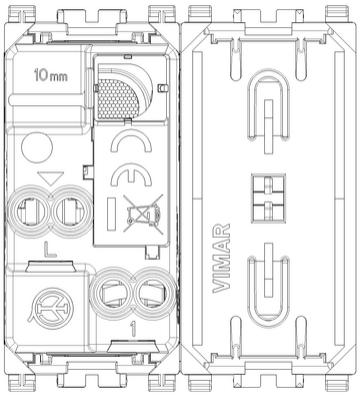

Backside view

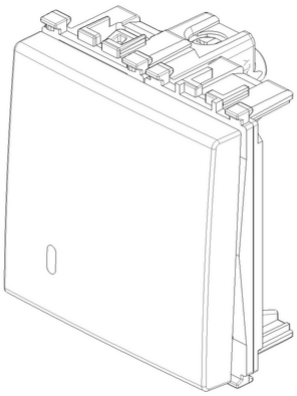

3D View

Certifications

- **00. CE Marking - EU**
- **01. IMQ - Italy (download)**
- **11. SNI-SUCOFINDO Indonesia**
- **14. TSE - Turkey**
- **15. CCC - China (download)**
- **19. NOM - Mexico**
- **26. SASO - Saudi Arabia (download)**
- **31. TISI - Thailand**
- **35. RCM - Australia**
- **36. ISI - India**
- **37. Marking - Morocco**
- **96. Electrotechnical expert (download)**
- **99. WEEE Directive (download)**

Technical data

Class group: Domestic switching devices

Class: Push button

Assembly arrangement: Modular device for domestic switching devices

Model: Single push button

Operating method: Push button

Number of rockers: 1

Number of modules (module system): 200

Number of poles: 1

Nominal voltage: 250 V

Rated current: 10,00 A

With lighting: Yes

Monitoring contact: No

Mounting method: Built-in

Type of fastening: Engage (snap)

Material: Plastic

Material quality: Thermoplastic

Halogen free: Yes

Surface protection: Lacquered

Surface finishing: Matt

Colour: Aluminium

RAL-number (similar): 9007

Transparent: No

Label space/information surface: Yes

Suitable for degree of protection (IP): IP40

Device width: 44,80 mm

Device height: 49,00 mm

Device depth: 36,80 mm

Packaging



8007352601369

Qtà	1 NR
Dim	5.1x4.3x5.3 [cm]
Weight	32.9 [g]



8007352603356

Qtà	20 NR
Dim	26.9x11.6x9 [cm]
Weight	736.8 [g]



8007352648111

Qtà	240 NR
Dim	38x28.5x35.5 [cm]
Weight	9,372 [g]

Legal

Vimar reserves the right to change at any time and without notice the characteristics of the products reported.Installation should be carried out by qualified staff in compliance with the current regulations regarding the installation of electrical equipment in the country where the products are installed.For the terms of use of the information on the product info sheet see Condizioni di utilizzo.