ARKÉ: 1P NO 10A push button Metal

19008.M

Wiring devices / Traditional wiring devices / ARKÉ / Devices



1P NO 10A push button Metal

1P NO 10 A 250 V~ push button, lightable, replaceable button, Metal

Product Status

3 - Active

Minimum order quantity


50 NR

Gallery







Drawings

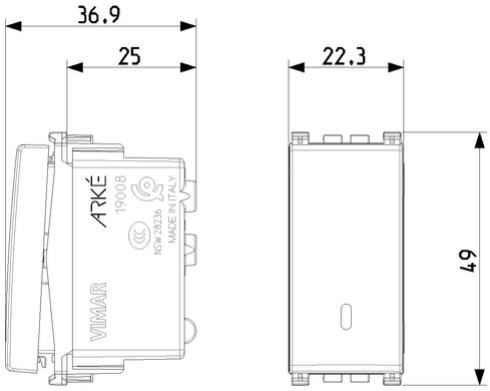

Space view

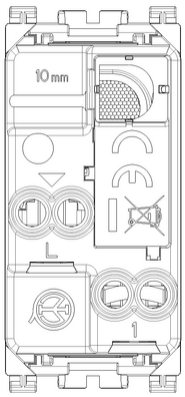

Backside view

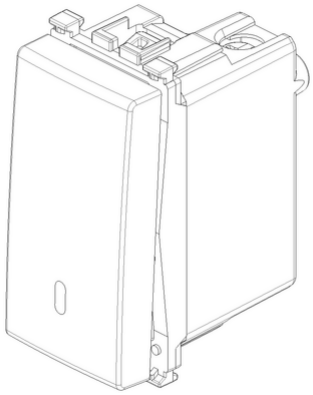

3D View

Certifications

- **00. CE Marking - EU**
- **01. IMQ - Italy (download)**
- **07. INGCER - Chile**
- **11. SNI-SUCOFINDO Indonesia**
- **14. TSE - Turkey**
- **15. CCC - China (download)**
- **19. NOM - Mexico**
- **26. SASO - Saudi Arabia (download)**
- **31. TISI - Thailand**
- **35. RCM - Australia**
- **36. ISI - India**
- **37. Marking - Morocco**
- **50. Product Environm. Profile (download)**
- **92. RoHS UAE**
- **96. Electrotechnical expert (download)**
- **99. WEEE Directive (download)**

Technical data

Class group: Domestic switching devices

Class: Push button

Assembly arrangement: Modular device for domestic switching devices

Model: Single push button

Operating method: Push button

Number of rockers: 1

Number of modules (module system): 100

Number of poles: 1

Nominal voltage: 250 V

Rated current: 10,00 A

With lighting: Yes

Monitoring contact: No

Mounting method: Built-in

Type of fastening: Engage (snap)

Material: Plastic

Material quality: Thermoplastic

Halogen free: Yes

Surface protection: Lacquered

Surface finishing: Matt

Colour: Aluminium

RAL-number (similar): 9007

Transparent: No

Label space/information surface: Yes

Suitable for degree of protection (IP): IP40

Device width: 22,30 mm

Device height: 49,00 mm

Device depth: 40,80 mm

Packaging



8007352593862

Qtà	1 NR
Dim	4.1x2.8x5.3 [cm]
Weight	24.7 [g]



8007352593879

Qtà	50 NR
Dim	21.4x11.6x14.2 [cm]
Weight	1,328 [g]



8007352593886

Qtà	500 NR
Dim	57.5x22.5x30 [cm]
Weight	13,750 [g]



8007352750524

Qtà	10,500 NR
Dim	120x80x105 [cm]
Weight	288,750 [g]

Legal

Vimar reserves the right to change at any time and without notice the characteristics of the products reported.Installation should be carried out by qualified staff in compliance with the current regulations regarding the installation of electrical equipment in the country where the products are installed.For the terms of use of the information on the product info sheet see Condizioni di utilizzo.