ARKÉ: Univ.MASTER rotary-dimmer 230V Metal

19136.1.M

Wiring devices / Traditional wiring devices / ARKÉ / Devices



Univ.MASTER rotary-dimmer 230V Metal

Universal-dimmer 230 V~ 50 Hz, phase-cutting, for: 40-300 W incandescent lamps, 40-300 VA electronic transfomers, 10-200 W CFL lamps, 3-200 W LED lamps, LED phase-cutting electronic transfomers, ON/OFF or built-in or from NO peripheral push buttons control, regulation by rotary potentiometer, MASTER function for 19137, minimum brightness regulation, visible in darkness, Metal. Not for Isoset enclosures

Product Status

3 - Active


Minimum order quantity

10 NR


Sheets, Manuals, Documentation

- Light multilanguage instructions sheet (949 kb)
- Full multilanguage instructions sheet (934 kb)


Drawings

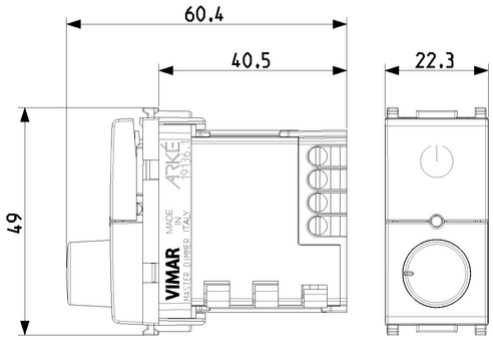

Space view

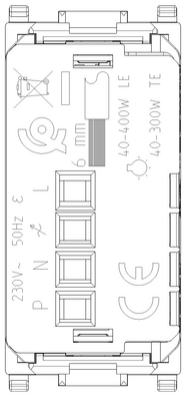

Backside view

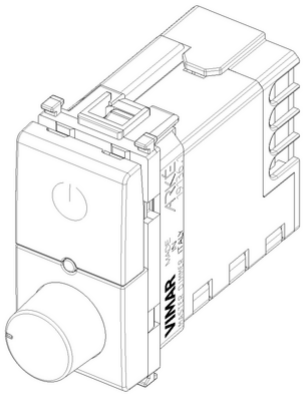

3D View

Certifications

- **00. CE Marking - EU**
- **31. TISI - Thailand**
- **37. Marking - Morocco**
- **92. RoHS UAE**
- **96. Electrotechnical expert (download)**
- **99. WEEE Directive (download)**

Technical data

Class group: Domestic switching devices

Class: Dimmer

Operating method: Turn button

Mounting method: Flush-mounted

Material: Plastic

Material quality: Thermoplastic

Surface protection: Lacquered

Surface finishing: Matt

Colour: Aluminium

RAL-number (similar): 9007

Transparent: No

Nominal voltage: 230,00 - 230,01 V

Connection type: Screwed terminal

Device width: 22,30 mm

Device height: 49,00 mm

Device depth: 60,40 mm

Packaging



8007352594227

Qtà	1 NR
Dim	5.2x3.9x6.2 [cm]
Weight	56 [g]



8007352594234

Qtà	10 NR
Dim	20.5x11.5x7 [cm]
Weight	622.8 [g]

Legal

Vimar reserves the right to change at any time and without notice the characteristics of the products reported.Installation should be carried out by qualified staff in compliance with the current regulations regarding the installation of electrical equipment in the country where the products are installed.For the terms of use of the information on the product info sheet see Condizioni di utilizzo.